

FALCON®

24/25 Series

Heavy duty touch bar exit device



Table of contents

4	Introducing the 24 Series and 25 Series	28	24 Series trims
6	25 Series rim devices	29	24 Series finishes
8	25 Series vertical rod devices	30	24 Series types and functions
10	25 Series mortise devices	31	24 Series door application
12	25 Series concealed vertical rod devices	32-33	Electric latch retraction
14	25 Series accessories	34-35	Delayed egress
15	25 Series strikes	36	Electric lock/unlock trim
16	25 Series trims	37	Exit alarm
17	25 Series finishes	38	Device monitoring
18	25 Series types and functions	39	Power supply
19	25 Series door application	40	Electrical options summary
20	24 Series rim devices	41-43	How to order
22	24 Series vertical rod devices		
24	24 Series concealed vertical rod devices		
26	24 Series accessories		
27	24 Series strikes		

The Falcon difference

Safety, security and uncompromising value

At Falcon, we know that every product you sell not only has to meet local building codes, but also your expectations for performance and quality. We take your expectations seriously, and that's why we build our touchbars to deliver durability, convenience and unmatched value. After all, we've built our reputation on the same standards that you have – providing quality products at a reasonable price delivered on time. It's the way we do business and it's what makes Falcon exits a powerful choice no matter what your project.

The Falcon 24 and 25 Series

The perfectly simple, tougher than nails, costs less than you think, fits anywhere exit device.

Offices, banks, assisted living facilities, retail stores and other commercial buildings have constant traffic, so door hardware must be able to take continual use and abuse. The Falcon 24 and 25 Series exit devices fill the bill with some of the toughest, most reliable performance in the business. A host of features makes this a smart solution, like a choice of an A or B label fire rating, electrified and panic options, and a full complement of trims. Sleek, streamlined styling and a choice of wide (25 Series) and narrow stile (24 Series) device applications means a smart solution for your building design, as well as its use. And since they're backed by one of the best names in the business, you can be sure you're getting the utmost value, reliability and durability.

Features

Streamlined design includes flush-end cap for clean lines and a more attractive installation.


Stainless steel pushpad cover for a scratch-resistant surface.

Clean design with no exposed screws or rivets on the back of the device.

Patent-pending deadlocking technology ensures reliable security.

One trim input design for maximum versatility.

Extruded aluminum construction delivers greater strength and impact resistance.

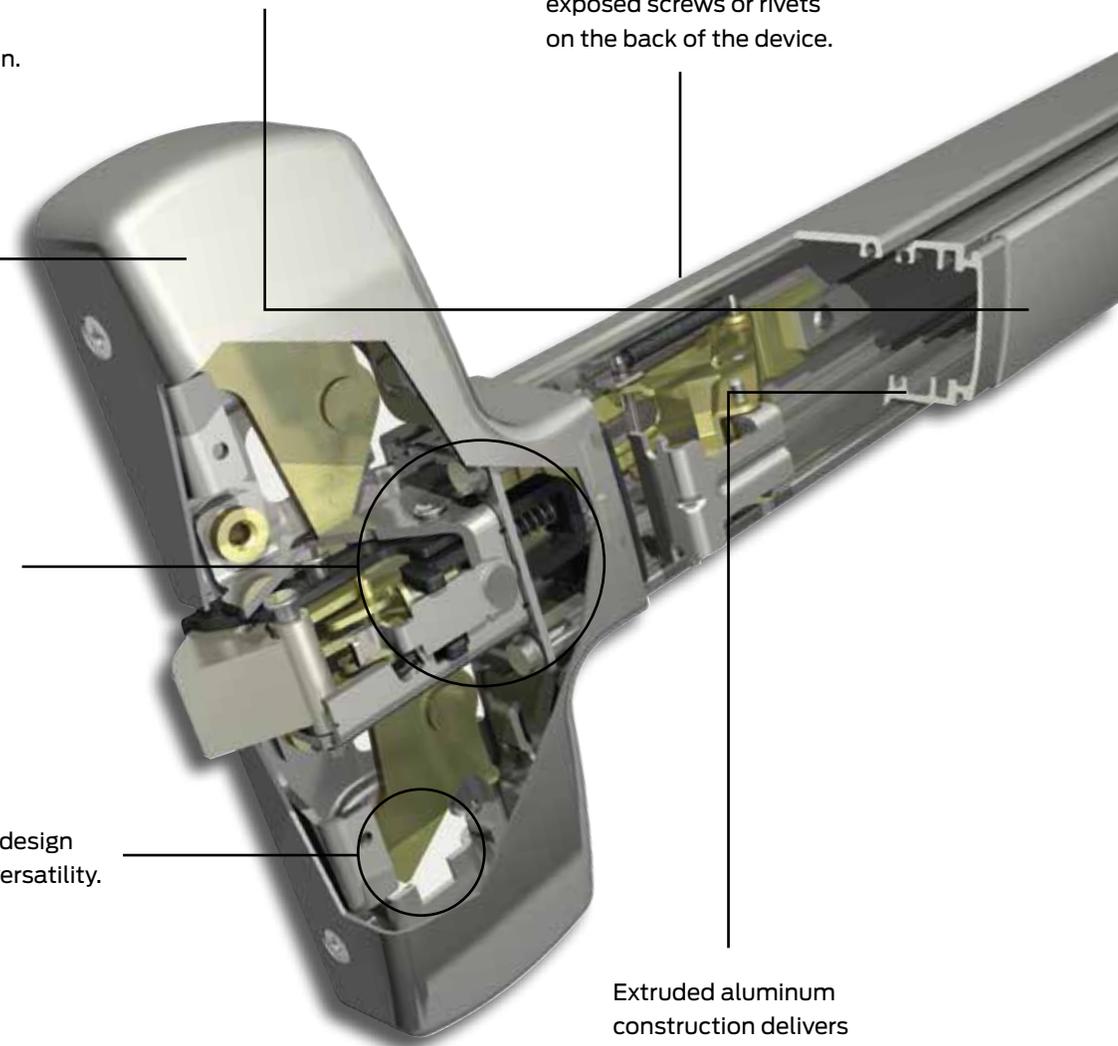

Falcon exit devices

Architectural pushpads

Commercial pushpads



24/25 Series

19 Series

1490/1590

1690/1790

Selling features	<ul style="list-style-type: none"> • Maximum flexibility in a variety of applications • Wide range of features and options • Patent pending deadlocking technology 	<ul style="list-style-type: none"> • Lowest cost most dependable light-duty exit • Large trim selection • Full compliment of electrical options • Standard deadlocking 	<ul style="list-style-type: none"> • Steel operating mechanisms • Aluminum push bar and end caps • Durable design • Surface vertical and rim options available 	<ul style="list-style-type: none"> • Patented pending latchbolt for hurricane ratings • #1 selling exit device for aluminum doors • Full compliment of electrical options • Durable design 	
	Applications	<ul style="list-style-type: none"> • Frequent traffic • Offices, churches, hospitality, retail, education, healthcare • Interior, exterior, new construction, retro-fit 	<ul style="list-style-type: none"> • Moderate traffic • Commercial, multi-family, office, retail • Interior, exterior, retro-fit 	<ul style="list-style-type: none"> • Moderate traffic • Commercial, multi-family, office, retail • Interior, exterior, retro-fit 	<ul style="list-style-type: none"> • Moderate traffic • Commercial, multi-family, office, retail • Interior, exterior, retro-fit
	Device options	<ul style="list-style-type: none"> • Rim, SV, CV, M • 6 functions /9 finishes • 4 lever designs • 10-year warranty 	<ul style="list-style-type: none"> • Rim, SV • 7 functions /4 lever designs • 3 finishes • 10-year warranty 	<ul style="list-style-type: none"> • CV=1490/Rim=1590 • 4 functions/10 finishes • 3 length options • 10-year warranty 	<ul style="list-style-type: none"> • CV = 1690/Rim = 1790 • 4 functions/7 finishes • 4 length options • 10-year warranty

Crossbars

Recessed/ concealed devices



XX

1990

2090

2390

<ul style="list-style-type: none"> • Classic traditional design • Dependable and attractive • Economic crossbar option • Panic and fire rated options 	<ul style="list-style-type: none"> • Classic industry look • Balanced appearance, dependable performance and economical pricing • Hardened steel latches • Adjustable strike to ensure safety, security and smooth operation 	<ul style="list-style-type: none"> • Classic looks in a rim device • Designed for high use and abuse • 1/2" inch steel latchbolt • Surface mounted strikes for full frame or blade type stops 	<ul style="list-style-type: none"> • Reduced projection recessed device • Tough, reliable performance • Easy rod adjustment simplifies installation • Smooth, reliable operation
<ul style="list-style-type: none"> • Light/moderate traffic • Commercial, multi-family, office, retail • Interior, exterior, retro-fit 	<ul style="list-style-type: none"> • Light traffic • Commercial, multi-family, office, retail • Interior, exterior, retro-fit 	<ul style="list-style-type: none"> • Light traffic • Commercial, multi-family, office, retail • Interior, exterior, retro-fit 	<ul style="list-style-type: none"> • Moderate/ frequent traffic • Healthcare, assisted living, education • Interior, new construction
<ul style="list-style-type: none"> • Rim, SV, CV, M • 13 functions/8 finishes • 5 lever options • 10-year warranty 	<ul style="list-style-type: none"> • CV • 4 functions/10 finishes • 2 length options • 10-year warranty 	<ul style="list-style-type: none"> • Rim • 4 functions/10 finishes • 2 length options • 10-year warranty 	<ul style="list-style-type: none"> • CV • 3 functions/4 finishes • 2 length options • 10-year warranty

25-R Series

Rim device

Panic exit hardware

The Falcon 25-R Series rim device meets the demanding requirements of high traffic installations with a single-point, rim type latch and a streamlined touch bar design. This device can also be electrified for maximum ease of use and accessibility.



299 Strike



2789
Dogging key



Cylinder dogging

Single door application

Device	Door size	Door strike	Door stile (in)	Min door opening width
25-R	3'	299	4"	2' 7 1/2"
		264	3 7/8"	2' 7 3/8"
		1439	3 1/4"	2' 6 3/4"
		1606	3 5/8"	2' 7 1/8"
25-R	4'	299	4"	3' 1 1/2"
		264	3 7/8"	3' 1 3/8"
		1439	3 1/4"	3' 3/4"
		1606	3 5/8"	3' 1 1/8"

Double door application

Device	Door size	Strike x mullion	Door stile (in)	Min door opening width
25-R	3'	299 x 2923	4 1/8"	2' 7 1/2"
		299 x 4023	4 3/8"	2' 7 1/2"
		264 x 2923	4"	2' 7 3/8"
		264 x 4023	4 1/4"	2' 7 3/8"
		1439 x 2923	3 7/8"	2' 7 1/4"
		1439 x 4023	4 1/8"	2' 7 1/4"
		1606 x 2923	4 1/4"	2' 7 1/8"
		1606 x 4023	4 1/2"	2' 7 1/8"
25-R	4'	299 x 2923	4 1/8"	3' 1 1/2"
		299 x 4023	4 3/8"	3' 1 1/2"
		264 x 2923	4"	3' 1 3/8"
		264 x 4023	4 1/4"	3' 1 3/8"
		1439 x 2923	3 7/8"	3' 1 1/4"
		1439 x 4023	4 1/8"	3' 1 1/4"
		1606 x 2923	4 1/4"	3' 1 1/8"
		1606 x 4023	4 1/2"	3' 1 1/8"
25-Vx 25-R	3'	1609	3 1/2"	2' 7 5/8" for 3 1/2" Min stile
25-Vx 25-R	4'	1609	3 1/2"	3' 1 5/8" for 3 1/2" Min stile

Specifications

Hand:	Non-handed
Finishes:	US3 (605); US4 (606); US10 (612); US11 (643e); US15 (619); US19 (622); US26 (625); US26D (626); US32 (629); US32D (630); US28 (628), 313AN (710) (see page 17 for finishes)
Strikes:	299 strike standard (see page 15 for additional info)
Latchbolt:	Stainless steel, 3/4" throw
Deadlocking latchbolt:	Standard
Dogging feature:	Half turn hex dogging standard. No threaded parts to wear out.
Cylinder dogging:	Specify "CD" prefix. Uses 1 1/8" long mortise cylinder with standard cam.
Stock sizes:	See chart to left. Cut to size in the field.
Doors:	1 3/4" thick, wood or metal. Specify thickness if other than 1 3/4".
Projections:	2 3/4" maximum, 2" dogged.
Mounting height:	40 1/4" from CL to finished floor.
Electric functions:	Can be interfaced with building security systems. Latch retraction, FSA/FSE trim, security monitoring, delayed egress and exit alarm available (EL fail-secure only). Subject to code requirements, state and local (see pages 33-40 for details).
Fasteners:	All mounting screws are concealed, sheet metal screws and machine screws standard.
Sex bolts:	Recommended when device is used with hollow core wood, composite or light gauge hollow metal doors. For EO device, specify 8 - 425 (#10-24) SNB. For devices with trim, specify 2 - 425 (#10-24) SNB.
ANSI:	Certified ANSI A156.3-2001 grade 1 standards.
Center case & working parts:	Center case is heavy wrought and sintered metal parts.
Shim kits:	For glass lite applications; 1/4" thick, specify SK25-RM.
579 Strike retrofit kit:	Consult factory.

F-25-R Series

Rim device

🔥 Fire exit hardware

The Falcon F-25-R Series rim device combines sleek styling and durability with the protection of a fire-rated device. The F-25-R also features a single-point, rim type latch and can be electrified.



299F Strike



499F Strike



Single door application

Device	Door size	Door strike	Min stile (in)	Min door opening width
F-25-R	3'	299-F	4"	2' 7 1/2"
F-25-R	4'	299-F	4"	3' 1 1/2"

Double door application

Device	Door size	Door strike	Min stile (in)	Min door opening width
F-25-R	3'	499-F x F-4023	4 1/2"	2' 7 5/8"
F-25-R	4'	499-F x F-4023	4 1/2"	3' 1 5/8"

Specifications


Hand:	Non-handed
UL:	"A" label (3 hr.); 4'0" x 8'0"; 8'0" x 8'0" with F-4023 mullion. "B" label (1 1/2 hr.); 8'0" x 8'0"; with KRF4023.
Finishes:	US3 (605); US4 (606); US10 (612); US11 (643e); US15 (619); US19 (622); US26 (625); US26D (626); US32 (629); US32D (630); US28 (628), 313AN (710) (see page 17 for finishes)
Strikes:	299F strike standard. 499F standard for pairs with mullion.
Latchbolt:	Stainless steel, 3/4" throw
Deadlocking latchbolt:	Standard
Stock sizes:	See chart to left. Cut to size in the field.
Doors:	1 3/4" thick, wood or metal. Specify thickness if other than 1 3/4".
Projections:	2 3/4" maximum.
Mounting height:	40 1/4" from CL to finished floor.
Electric functions:	Can be interfaced with building security systems. Latch retraction, FSA/FSE trim, security monitoring, delayed egress and exit alarm available (EL fail-secure only). Subject to code requirements, state and local (see pages 33-40 for details).
Fasteners:	All mounting screws are concealed, sheet metal screws and machine screws standard.
Sex bolts:	Required for use in EO applications when used with wood, composite or non-reinforced hollow metal doors. For EO device, specify 8 - 425 (#10-24) SNB. For devices with trim, specify 2 - 425 (#10-24) SNB.
ANSI:	Certified ANSI A156.3-2001 grade 1 standards.
Center case & working parts:	Center case is heavy wrought and sintered metal parts.
Shim kits:	For glass lite applications; 1/4" thick, specify SK25-RM.

25-V Series

Vertical rod device

Panic exit hardware

High-traffic applications demand the added strength and protection that comes with a vertical rod device. The Falcon F-25-V Series delivers with a surface-applied design that includes standard top latch and deadlocking. The sleek touch bar design ensures an attractive installation.

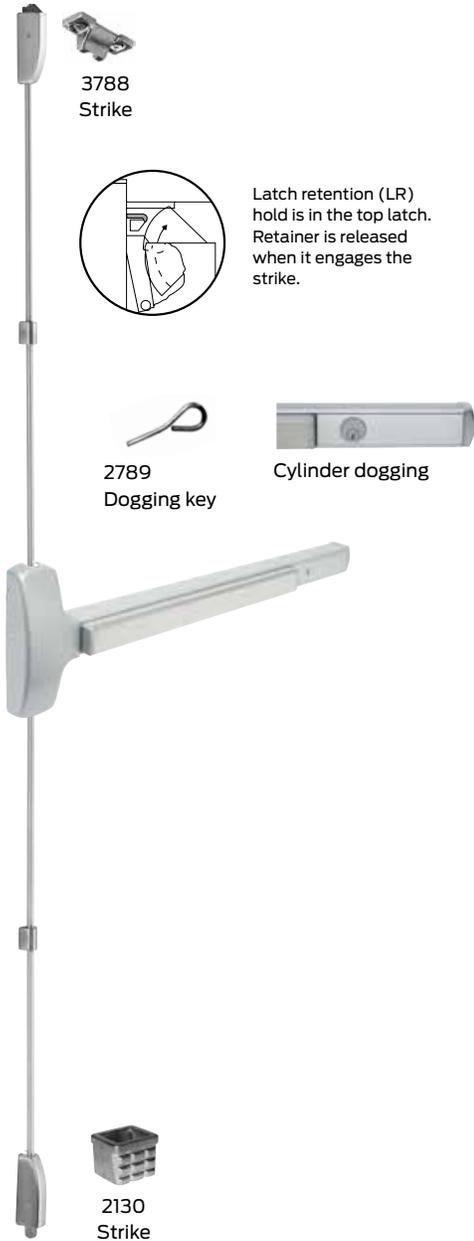

Specifications

Hand:	Field reversible.
Finishes:	US3 (605); US4 (606); US10 (612); US11 (643e); US15 (619); US19 (622); US26 (625); US26D (626); US32 (629); US32D (630); US28 (628), 313AN (710) (see page 17 for finishes)
Strikes:	3788 top strike is surface applied 2130 bottom strike is mortised into floor
Angle bracket	Use 4215 angle bracket in flush transom installations Allows use of standard 3788 strike
Latchbolt:	Top stainless steel $\frac{3}{4}$ " throw. Bottom bolt, $\frac{1}{2}$ " throw.
Deadlocking latchbolt:	Standard in top latch.
Dogging feature:	Half turn hex dogging standard. No threaded parts to wear out.
Cylinder dogging:	Specify "CD" prefix. Uses $1\frac{1}{8}$ " long mortise cylinder with standard cam.
Stock sizes:	See chart to below.
Doors:	$1\frac{3}{4}$ " thick, wood or metal. Specify thickness if other than $1\frac{3}{4}$ ".
Projections:	$2\frac{3}{4}$ " maximum, 2" dogged.
Stile :	See chart below.
Electric functions:	Can be interfaced with building security systems. Latch retraction, FSA/FSE trim, security monitoring, delayed egress and exit alarm available (EL fail-secure only). Subject to code requirements, state and local. (see pages 32-40 for details).
Fasteners:	All mounting screws are concealed, sheet metal screws and machine screws available, specify AMS.
Sex bolts:	Recommended when device is used with hollow core wood, composite or light gauge hollow metal doors. For EO device, specify 12 - 425 (#10-24) SNB. For devices with trim, specify 8 - 425 (#10-24) SNB.
ANSI:	Certified ANSI A156.3-2001 grade 1 standards.
Vertical rods:	Furnished to length based on a $40\frac{1}{4}$ " horizontal CL from finished floor and a 7'0" door standard. Variations from these standards must be specified when ordering.
25-V-LBR:	Less bottom rod vertical device.
Shim kits:	For glass lite applications; $\frac{1}{4}$ " thick, specify SK25-V.

Device	Door size	Door strike	Min stile (in)	Min door opening width
25-V	3'	All	3 $\frac{1}{2}$ "	2' 7 $\frac{1}{8}$ "
25-V	4'	All	3 $\frac{1}{2}$ "	3' 1 $\frac{1}{8}$ "
25-V x 25-R	3'	1609	3 $\frac{1}{2}$ "	2' 7 $\frac{5}{8}$ " for 3 $\frac{1}{2}$ " Min. Stile
25-V x 25-R	4'	1609	3 $\frac{1}{2}$ "	2' 1 $\frac{5}{8}$ " for 3 $\frac{1}{2}$ " Min. Stile

F-25-V Series

Vertical rod device

🔥 Fire exit hardware

When your application requires strength and durability, plus fire rated performance, the F-25-V Series is the total package. This surface-applied vertical rod device includes a sleek touch bar design with top latch and deadlocking standard.



Specifications

Hand:	Field reversible.
UL:	"A" Label (3 hr) - 8' x 10' double egress; 90 min. same egress - 8' x 10' Wood door; 20 min. 8' x 10'; 90 min. 8' x 9'. Consult door manufacturer for maximum rating.
Finishes:	US3 (605); US4 (606); US10 (612); US10B (613); US11 (643e); US15 (619); US19 (622); US26 (625); US26D (626); US32 (629); US32D (630), US28 (628), 313AN (710) (see page 17 for finishes)
Strikes:	3788 top strike is surface applied. 2130 bottom strike is mortised into floor.
Latchbolt:	Top stainless steel 3/4" throw. Bottom bolt, 1/2" throw.
Deadlocking latchbolt:	Standard in top latch
Latch retention hold:	Standard with top latch
Stock sizes:	See chart below
Doors:	1 3/4" thick, wood or metal. Specify thickness if other than 1 3/4".
Projections:	2 3/4" maximum.
Stile :	See chart below.
Electric functions:	Can be interfaced with building security systems. Latch retraction, FSA/FSE trim, security monitoring, delayed egress and exit alarm available (EL fail-secure only). Subject to code requirements, state and local (see pages 32-40 for details).
Fasteners:	All mounting screws are concealed. All machine screws (AMS) standard.
Sex bolts:	Required when used with wood, composite or non-reinforced hollow metal doors. For EO device, specify 12 - 425 (#10-24) SNB. For devices with trim, specify 8 - 425 (#10-24) SNB.
ANSI:	Certified ANSI A156.3-2001 grade 1 standards.
F-25-V:	Latch Retention (LR) top latch and bottom square bolt. 3788 strike top, 2130 flush strike bottom.
F-25-V-LBR:	Less bottom rod vertical device. "A" Label (3 Hr) - 8' x 8'; 90 min. same egress - 8' x 8'.
Vertical rods:	Furnished to length based on a 40 1/4" horizontal CL from finished floor and a 7'0" door standard. Variations from these standards must be specified when ordering.
Shim kits:	For glass lite applications; 1/4" thick, specify SK25-V.

Device	Door size	Door strike	Min stile (in)	Min door opening width
F-25-V	3'	All	3 1/2"	2' 7 1/8"
F-25-V	4'	All	3 1/2"	3' 1 1/8"

25-M Series

Mortise device

Panic exit hardware

The Falcon 25-M Series is the only device that pairs a tough, reliable exit device with our strongest mortise lock. The result is maximum safety and security in a single-point, mortise latch type device that also has an attractive touch bar design.



Device	Door size	Door strike	Door stile (in)	Min door opening width
25-M	3'	All	4 1/2"	2' 7 1/2"
25-M	4'	All	4 1/2"	3' 2"

Specifications

Hand:	Handed.
Finishes:	US3 (605); US4 (606); US10 (612); US11 (643e); US15 (619); US19 (622); US26 (625); US26D (626); US32 (629); US32D (630); US28 (628), 313AN (710) (see page 17 for finishes).
Strikes:	1279 standard, F1280 and 1281 optional.
Latchbolt:	Stainless steel, 3/4" throw.
Deadlocking latchbolt:	Standard.
Dogging feature:	Half turn hex dogging standard. No threaded parts to wear out.
Cylinder dogging:	Specify "CD" prefix. Uses 1 1/8" mortise cylinder with standard cam.
Mounting height:	40 1/4" from CL to finished floor. For mortise lock prep per ANSI A115.1-1990.
Electric functions:	Can be interfaced with building security systems. Latch retraction, FSA/FSE trim, security monitoring, delayed egress and exit alarm available (EL fail-secure only). Subject to code requirements, state and local (see pages 32-40 for details).
Stile:	4 1/2" minimum.
Projection:	2 3/4" maximum, 2" dogged.
Stock Sizes:	See chart.
Doors:	1 3/4" thick, wood or metal. Specify thickness if other than 1 3/4".
Fasteners:	All mounting screws are concealed, sheet metal screws and machine screws standard.
Sex bolts:	Recommended when device is used with hollow core wood, composite or light gauge hollow metal doors. For EO device, specify 6 - 425 (#10-24) SNB. For devices with trim, specify 2 - 425 (#10-24) SNB.
ANSI:	Certified ANSI A156.3-2001 grade 1 standards.
Mortise lock:	Heavy wrought lock case with investment cast or sintered steel parts. Lock face is forged brass—fits standard cutout. Locks are designed to fit standard ANSI A115.1 preparation for 1 3/4" doors. Deadlocked when auxiliary bolt is depressed 5/16".
Shim kits:	For glass lite applications; 1/4" thick, specify SK25-RM.

F-25-M Series

Mortise device

🔥 Fire exit hardware

The Falcon F-25-M Series delivers the safety of a fire-rated exit device with a choice of ratings. The F-25-M can be paired with a Falcon mortise lock, assuring a tough and secure lock for any opening requiring a high level of safety and security.



Device	Door size	Door strike	Door stile (in)	Min door opening width
F-25-M	3'	All	4 1/2"	2' 7 1/2"
F-25-M	4'	All	4 1/2"	3' 2"

Specifications

Hand:	Handed.
UL:	"A" label (3 hr.); 4'0" x 10'0" single doors; 8'0" x 10'0" pair of doors (F-25-M x F-25-V or F-25-C). "B" label (1-1/2 hr) with FI280 open back strike.
Finishes:	US3 (605); US4 (606); US10 (612); US11 (643e); US15 (619); US19 (622); US26 (625); US26D (626); US32 (629); US32D (630); US28 (628), 313AN (710) (See page 17 for finishes.)
Strikes:	1279 standard. FI280 optional, B label (1 1/2 hr.).
Latchbolt:	Stainless steel, 3/4" throw.
Deadlocking latchbolt:	Standard.
Stock sizes	See chart.
Doors:	1 3/4" thick, wood or metal. Specify thickness if other than 1 3/4".
Projection:	2 3/4" maximum.
Stile:	4 1/2" minimum.
Mounting height	40 1/4" from CL to finished floor. For mortise lock prep per ANSI A115.1-1990.
Electric functions:	Can be interfaced with building security systems. Latch retraction, FSA/FSE trim, security monitoring, delayed egress and exit alarm available (EL fail-secure only). Subject to code requirements, state and local (see pages 32-40 for details).
Fasteners:	All mounting screws are concealed. All machine screws (AMS) standard.
Sex bolts:	Required when used with wood, composite or non-reinforced hollow metal doors. For EO device specify 6 - 425 (#10-24) SNB. For devices with trim, specify 2 - 425 (#10-24) SNB.
ANSI:	Certified ANSI A156.3-2001 grade 1 standards.
Mortise lock:	Heavy wrought lock case with investment cast or sintered steel parts. Lock face is forged brass—fits standard cutout. Locks are designed to fit standard ANSI A115.1 preparation for 1 3/4" doors. Deadlocked when auxiliary bolt is depressed 5/16".
Shim kits:	For glass lite applications; 1/4" thick, specify SK25-RM.

25-C Series

Concealed vertical rod device

Panic exit hardware

Concealed vertical rods add strength to the door, while maintaining an attractive appearance. The Falcon 25-C Series concealed vertical rod device offers great value, clean styling and the security benefits of two-point latching. Falcon's patented center slide mechanism allows easy rod adjustment in the field.



Specifications

Hand:	Field reversible.
Finishes:	US3 (605); US4 (606); US10 (612); US11 (643e); US15 (619); US19 (622); US26 (625); US26D (626); US32 (629); US32D (630); US28 (628), 313AN (710) (see page 17 for finishes)
Strikes:	4188 mortised top, 2130 bottom standard, 4155 and 2126A bottom optional
Latchbolt:	Top stainless steel 3/4" throw. Bottom bolt 1/2" throw.
Deadlocking latchbolt:	Standard in top latch
Latch retention hold:	Standard in top latch
Dogging feature:	Half turn hex dogging standard. No threaded parts to wear out.
Cylinder dogging:	Specify "CD" prefix. Uses 1 1/8" long mortise cylinder dogging with standard cam.
Stock sizes:	See chart.
Doors:	1 3/4" thick wood or metal. Specify thickness if other than 1 3/4".
Projection:	2 3/4" maximum, 2" dogged.
Stile:	3 1/2" minimum (6 1/2" minimum on wood doors).
Electric functions:	Can be interfaced with building security systems. Latch retraction, FSA/FSE trim, security monitoring, delayed egress and exit alarm available (EL fail-secure only). Subject to code requirements, state and local. (See pages 32-40 for details.)
Fasteners:	All mounting screws are concealed, sheet metal screws standard, machine screws available, specify AMS.
Sex bolts:	Recommended when device is used with hollow core wood, composite or light gauge hollow metal doors. For EO device, specify 6 - 425 (#10-24) SNB. For devices with trim, specify 2 - 425 (#10-24) SNB.
ANSI:	Certified ANSI A156.3-2001 grade 1 standards.
25-C-LBR:	Less bottom rod concealed vertical device.
Vertical rods:	Furnished to length based on 40 1/4" horizontal CL to finished floor and a 7'0" door. Variations from these standards must be specified when ordering.
Patented centerslide:	For ease of adjustment.
Shim kits:	Consult factory.

Device	Door size	Door strike	Min stile (in)	Min door opening width
25-C	3'	All	3 1/2" (6 1/2" for wood doors)	2' 7 1/8"
25-C	4'	All	3 1/2" (6 1/2" for wood doors)	3' 1 1/8"

F-25-C Series

Concealed vertical rod device

🔥 Fire exit hardware

The Falcon F-25-C Series device lets you combine the safety of a fire-rated device with the clean aesthetics that come with a concealed vertical rod installation. In-field adjustment is simple thanks to our patented center slide mechanism. Two-point latching ensures optimal security at the door.



Specifications

Hand:	Handed.
UL:	"A" label (3 hr.); 4'0" x 10'0" single doors; 8'0" x 10'0" pair of doors (F-25-M x F-25-V or F-25-C). "B" label (1-1/2 hr) with F1280 open back strike.
Finishes:	US3 (605); US4 (606); US10 (612); US11 (643e); US15 (619); US19 (622); US26 (625); US26D (626); US32 (629); US32D (630); US28 (628), 313AN (710) (see page 17 for finishes).
Strikes:	1279 standard. F1280 optional, B label (1 1/2 hr.).
Latchbolt:	Stainless steel, 3/4" throw.
Deadlocking latchbolt:	Standard
Stock sizes	See chart
Doors:	1 3/4" thick, wood or metal. Specify thickness if other than 1 3/4".
Projection:	2 3/4" maximum
Stile:	4 1/2" minimum
Mounting height	40 1/4" from CL to finished floor. For mortise lock prep per ANSI A115.1-1990.
Electric functions:	Can be interfaced with building security systems. Latch retraction, FSA/FSE trim, security monitoring, delayed egress and exit alarm available (EL fail-secure only). Subject to code requirements, state and local. (See pages 32-40 for details).
Fasteners:	All mounting screws are concealed. All machine screws (AMS) standard.
Sex bolts:	Required when used with wood, composite or non-reinforced hollow metal doors. For EO device specify 6 - 425 (#10-24) SNB. For devices with trim, specify 2 - 425 (#10-24) SNB.
ANSI:	Certified ANSI A156.3-2001 grade 1 standards.
Mortise lock:	Heavy wrought lock case with investment cast or sintered steel parts. Lock face is forged brass—fits standard cutout. Locks are designed to fit standard ANSI A115.1 preparation for 1 3/4" doors. Deadlocked when auxiliary bolt is depressed 5/16".
Shim kits:	For glass lite applications; 1/4" thick, specify SK25-RM.

Device	Door size	Door strike	Min stile (in)	Min door opening width
25-C	3'	All	3 1/2" (6 1/2" for wood doors)	2' 7 1/8"
25-C	4'	All	3 1/2" (6 1/2" for wood doors)	3' 1 1/8"

25 Series

Accessories and options



F-4023 Shown

Removable mullion

- The 2923, F4023, 4023, KRF-4023 and KR-4023 steel mullions are for use with the 25-R devices on double door openings.
Advantage: Increased security and tighter closure. Minimizes door warpage and sag. Regulates the flow of in-and-out traffic
- Falcon removable mullions are easily removed and reinstalled for full width access
- Rim devices are used on both leaves, attaining a perfectly symmetrical opening
- The mullion assembly consists of a mullion, top and bottom mounting brackets and a screw pack
- The F4023 and KRF-4023 fire-rated mullions also include four stabilizer blocks as required for labeled installations
- Strikes are not furnished with the mullion. Please see page 15 for strike information
- Mullions may be cut on the job for doors under stock lengths
- KR Mullions require 1 1/4" mortise cylinder with standard A cam

Mullion features

- Mullion fittings - ductile iron
- F4023, 4023, KRF-4023 and KR-4023 - 2" x 3" x height
- 2923 mullion - 1 1/2" x 2 1/2" x height
- Prime coat only
- 7' or 8' door opening standard, other door opening as specified

Cylinders

- Cylinder supplied only when specified
- Cylinders keyed different

Sex bolts

- 325 (1/4"-20 thread)
- 425 (#10-24 thread)

Dummy touch bars

- Active and Inactive models only. Active model offered with RX or RX/KOR. Consult factory for details
- To order, specify 250DT X finish, or 250DT X finish X active touch bar

(F)25-R Double door application


Strike	Installed with mullion	Min stile	B*
299	2923	4 1/8"	3"
299	4023	4 3/8"	3 1/4"
499-F	F-4023	4 1/2"	3 5/16"
264	2923	4"	2 7/8"
264	4023	4 1/4"	3 1/8"
1439	2923	3 7/8"	2 3/4"
1439	4023	4 1/8"	3"
1606	2923	4 1/4"	2 5/8"
1606	4023	4 1/2"	2 7/8"
1609	Surface 25-V	4"	2 3/8"

Cylinder reference

Device	Trim	Standard key cylinder	IC key cylinder
25 Series device	Cylinder dogging	985 - 1 1/8" Mortise cylinder	C987 - 1 3/8" Mortise cylinder (Blocking ring plus security collar must equal 1/4" thick)
25 Series device Rim & surface vertical	Cylinder only (NL - OP)	951- Rim cylinder	953 - Rim cylinder
25 Series device Moortise	Cylinder only (NL - OP)	* 986 - 1 1/4" Mortise cylinder	** C987 - 1 3/8" Mortise cylinder
25 Series trims	L, K, TP, NL	986 - 1 1/4" Mortise cylinder	C987 - 1 3/8"
264	4023 mullion	4 1/4"	3 1/8"

*Cylinder must be spaced off of the door a minimum of 1/4" via a recessed blocking ring

** Cylinder must be spaced off of the door a minimum of 3/8" via a recessed blocking ring.

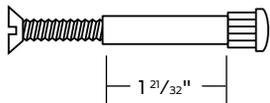

25 Series

Strikes and accessories

Strikes

For rim devices



264
2 7/8" x 1 1/4" x 9/16"
(H x W x D)
Panic device only.



299
7 7/8" x 1 1/4" x 13/16"
(H x W x D)
Panic device only.



299F
2 7/8" x 1 1/4" x 13/16"
(H x W x D)



499F
3 5/8" x 1 1/2" x 16/16"
(H x W x D)



1439 Blade stop
1 3/4" x 1 7/8" x 1/2"
(H x W x D)
Panic device only.



1606
2 7/8" x 1 3/8" x 3/8"
(H x W x D)
Panic device only.



1609
3 1/4" x 1 1/16" x 3/8"
(H x W x D)
Requires coordinator.
Panic device only.

For surface and concealed vertical rod devices



2130
(F)25-V and (F)25-C
standard bottom strike for
grouting into concrete or
masonry floors.



3788
Furnished top
of (F)25-V.



4155
Optional strike.
Panic device only.



4188
Top strike for
(F)25-C.

For mortise lock devices



1279
Closed strike used on
single doors and on fire
exit hardware doors with
coordinator.




F1280
Open back strike used on pairs of
1 3/4" doors without astragal or
coordinator. Can be used on stock
hollow metal doors. F1280 "B" label
(1 1/2 hr.) stainless steel strike
available.



1281
Open back strike for 1 3/4" doors.
8" x 1 1/4" face allow use in
mortise lock cutout of stock
hollow metal door.

Accessories



4215
Angle bracket for flush transom applications.
Does not require elimination of latch retention
feature. Accepts 3788 strike for 25-V device.

Surface vertical extension rods

Extension rods are available in 12", 24" and 36" lengths in all finishes. Both ends tapped and all-thread included as connector.




Concealed extension rods

Extension rods are available in 12", 24" and 36". Both ends have pressed-in, threaded inserts.



Filler Plates

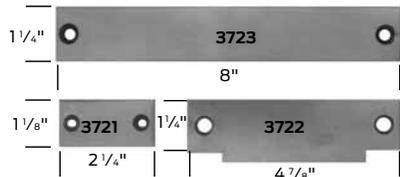

3721/ 3722/ 3723

Steel filler plates


- 3721 Cylindrical lock front filler
- 3722 Strike filler - set no. SC for 161 cutout
- 3723 Mortise lock front filler
- 3722 Strike filler - set no. SM for 86 cutout

25 Series

Trim designs

Functionality built into the trim, facilitating easy door preps, easy field retrofit and easy ordering.

Lever trims (510L)

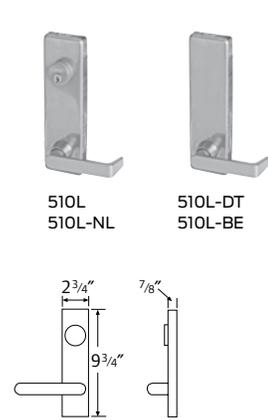

Lever designs



All levers return to within 1/2" of door.
 Escutcheon: 9 3/4" (H) x 2 3/4" (W) (specify handing) brass finish.
 Protected by easily replaceable shear pin.
 Lever is reversible, supplied RHR if not specified. For keyed functions, see page 14 for cylinder requirements.

Vandal - resistant lever trims (511L)



Provides resistance to rotation, making damage of trim due to attack from the outside less likely. Designed to operate normally after vandalism attempts without the need for maintenance personnel intervention.

- Heavy duty, vandal-resistant, ANSI A156.3 grade 1 security trim
- Lever deflects up to 22 ft-lb for a minimum of 10,000 vandal-resistant cycles
- Vandal resistance is present in both lever rotation directions
- After lever is fully deflected, lever stops rotating and a shear pin breaks at 70 ft-lb to prevent damage to unit
- Available on 25 rim, vertical, mortise, and concealed devices
- Retrofits all existing 25 trim without additional door prep
- Works with all electric lock and unlock functions
- Available in all finishes and lever designs including Avalon, Boardwalk, Broadway, Dane, Danish, Latitude, Longitude, Sutro, and Quantum

Pull trims (512)



Escutcheon: 16" x 2 3/4"
 Grip: 6 1/4" C-C
 Projection: 2 11/16"
 Brass
 For keyed functions, see page 14 for cylinder requirements.

Delta (717)



Knob trims (513K)



513K-DT
 513K-BE
 513K
 513K-NL

Round ball knob
 Escutcheon: 9 3/4" x 2 3/4"
 Projection: 4"
 Brass
 For keyed functions, see page 14 for cylinder requirements.

Cylinder only (NL-OP)

Key retracts latch bolt.
 Cylinder sold separately (see page 14).

25 Series

Trim chart & finish chart

Function

	Lock/ unlock	NL	DT	BE	FSA/ FSE
Lever (510)	510L	510L-DT	510-DT	510L-BE	510L-FSA 510L-FSE
Vandal-resistant lever (511)	511L	—	—	—	511L-FSA 511L-FSE
Pull trims (512)	512TP	512-NL	512DT	512TP-BE	512L-FSA 512L-FSE
Knob (513)	513K	513K-NL	513K-DT	513K-BE	513L-FSA 513L-FSE
Delta (717)	—	—	717DT	—	—

25 Series finishes











	Color	US number	BHMA number
	Brass, bright	US3	605
	Brass, satin	US4	606
	Bronze, satin	US10	612
	Bronze, aged	US11	643e*
	Nickel, satin	US15	619*
	Black, matte	US19	622*
	Chromium, bright	US26	625
	Chromium, satin	US26D	626
	Anodized aluminum	US28	628
	Stainless Steel, bright	US32	629
	Stainless Steel, satin	US32D	630
	Anodized duranodic	313AN	710

*Available on select devices and trims

25 Series

Types and functions

This page shows all 25 Series device and trim functions.

	Rim device ANSI type 1	Vertical rod device ANSI type 2	Mortise lock device ANSI type 3	Concealed vertical rod device ANSI type 8
Functions (ANSI) EO (01) Exit only, no trim.	(F)-25-R  25-R-EO	(F)-25-V  25-V-EO	(F)-25-M  25-M-EO	(F)-25-C  25-C-EO
DT (02) Entrance by trim when actuating bar is locked down.	 25-R-DT	 25-V-DT	 25-M-DT	 25-C-DT
NL (03) Entrance by trim when latchbolt is retracted by key. Key removable only when locked.	 25-R-NL	 25-V-NL	 25-M-NL	 25-C-NL
TP (05) Entrance by thumbpiece. Key locks or unlocks thumbpiece.	 25-R-TP	 25-V-TP	 25-M-TP	 25-C-TP
L or K (08) Entrance by knob or lever. Key locks or unlocks knob.	 25-R-L/K	 25-V-L/K	 25-M-L/K	 25-C-L/K
L(NL) or K(NL) (09) Entrance by knob or lever only when released by key. Key removable only when locked.	 25-R-L/K(NL)	 25-V-L/K(NL)	 25-M-L/K(NL)	 25-C-L/K(NL)

25 Series

Door application



Label doors

Models F-25-R, F-25-M, F-25-C and F-25-V are labeled for use as  Fire exit hardware.

Door thickness

All devices and components supplied for 1 3/4" doors standard. Specify door thickness if other than 1 3/4".

Door application chart

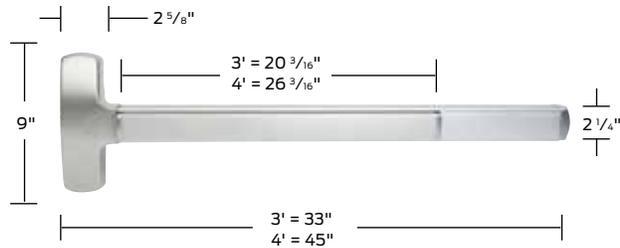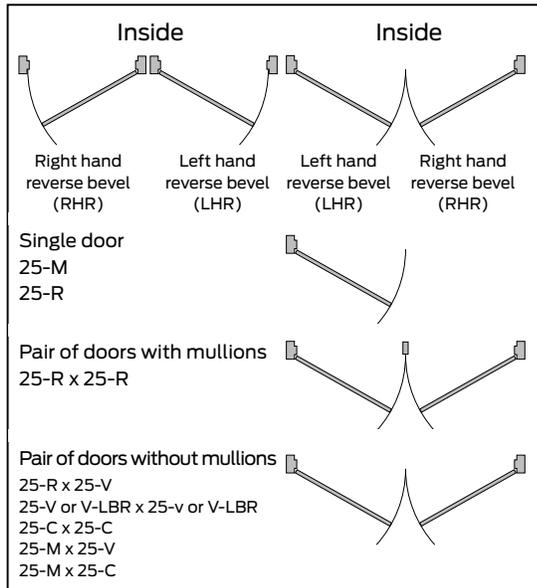

Product information and specifications contained in this catalog are subject to change without notice. Please consult the factory.

24-R Series

Rim device

Panic exit hardware

The Falcon 24-R Series narrow stile rim device allows for application versatility in high-traffic installations. Standard features include a single-point, rim type latch and a streamlined touch bar design. This device can also be electrified for maximum ease of use and accessibility.



299 Strike



2789 Dogging key



Cylinder dogging

Single door application

Device	Door size	Door strike	Min stile (in)	Min door opening width
24-R	3'	299	3 1/2"	2' 7 1/2"
		264	3 3/8"	2' 7 3/8"
		1439	2 1/4"	2' 6 3/4"
		1606	2 3/4"	2' 7 1/8"
24-R	4'	299	3 1/2"	3' 1 1/2"
		264	3 3/8"	3' 1 3/8"
		1439	2 1/4"	3' 3/4"
		1606	2 3/4"	3' 1 1/8"

Double door application

Device	Door size	Door strike	Min stile (in)	Min door opening width
24-R	3'	299 x 2923	3 1/2"	2' 7 1/2"
		299 x 4023	4"	2' 7 1/2"
		264 x 2923	3 3/8"	2' 7 3/8"
		264 x 4023	3 5/8"	2' 7 3/8"
		1439 x 2923	3 1/2"	2' 7 1/8"
		1439 x 4023	3 3/4"	2' 7 1/8"
		1606 x 2923	3 1/2"	2' 7 1/8"
		1606 x 4023	3 3/4"	2' 7 1/8"
		4396 x 4423	2 1/8"	2' 6 5/8"
		24-R	4'	299 x 2923
299 x 4023	4"			3' 1 1/2"
264 x 2923	3 3/8"			3' 1 3/8"
264 x 4023	3 5/8"			3' 1 3/8"
1439 x 2923	3 1/2"			3' 1 1/8"
1439 x 4023	3 3/4"			3' 1 1/8"
1606 x 2923	3 1/2"			3' 1 1/8"
1606 x 4023	3 3/4"			3' 1 1/2"
4396 x 4423	2 1/8"			3' 5/8"

Specifications

Hand:	Non-handed
Functions:	24-EO (exit only) has all functions built in. Order trim with the device, or add it later (see trim selection chart on page 29).
Finishes:	US3 (605); US4 (606); US10 (612); US11 (643e); US15 (619); US19 (622); US26 (625); US26D (626); US32 (629); US32D (630); US28 (628), 313AN (710) (see page 29 for finishes)
Strikes:	299F strike standard. See page 27 for optional strikes.
Latchbolt:	Stainless steel, 3/4" throw.
Deadlocking latchbolt:	Optional. Specify "DL" prefix.
Dogging feature:	Half turn hex dogging standard. No threaded parts to wear out.
Stock sizes:	See chart to left.
Doors:	1 3/4" thick, wood or metal. Specify thickness if other than 1 3/4".
Projections:	2 3/4" maximum, 2" dogged.
Mounting height:	40" from CL to finished floor.
Electric functions:	Can be interfaced with building security systems. Latch retraction, security monitoring, delayed egress and exit alarm available (EL fail-secure only). Subject to code requirements, state and local (see pages 32-40 for details).
Fasteners:	All mounting screws are concealed.
Sex bolts:	Recommended when device is used with hollow core wood, composite or light gauge hollow metal doors. For EO device, specify 4 - 425 (#10-24) SNB and 2 - 325 (1/4"-20) SNB. For devices with trim, specify 4 - 425 (#10-24) SNB.
ANSI:	Certified ANSI A156.3-2001 grade 1 standards.
Center case & working parts:	Wrought steel with heavy wrought and sintered metal parts.
Shim kits:	For glass lite applications; 1/4" thick, specify SK24-R.

F-24-R Series

Rim device

🔥 Fire exit hardware

The Falcon F-24-R Series rim device combines sleek styling and durability with the protection of a fire-rated device. A narrow stile design allows for installation versatility. The F-24-R also features a single-point, rim type latch and can be electrified.



299F Strike



Single door application

Device	Door size	Door strike	Min stile (in)	Min door opening width
F-24-R	3'	299-F	3 1/2"	2' 7 1/2"
F-24-R	4'	299-F	3 1/2"	3' 1 1/2"

Double door application

Device	Door size	Door strike	Min stile (in)	Min door opening width
F-24-R	3'	299-F x F-4023	4"	2' 7 1/2"
F-24-R	4'	299-F x F-4023	4"	3' 1 1/2"

Specifications

Hand:	Non-handed
UL:	"B" label (1 1/2 hr.); 4'0" x 8'0".
Functions	F-24-REO (Exit only) has all functions built in. Order trim with the device, or add it later. (see trim selection chart on page 29)
Finishes:	US3 (605); US4 (606); US10 (612); US11 (643e); US15 (619); US19 (622); US26 (625); US26D (626); US32 (629); US32D (630); US28 (628), 313AN (710) (see page 29 for finishes)
Strikes:	299F strike standard.
Latchbolt:	Stainless steel, 3/4" throw.
Deadlocking latchbolt:	Standard.
Stock sizes:	See chart to left.
Doors:	1 3/4" thick, wood or metal. Specify thickness if other than 1 3/4".
Projections:	2 3/4" maximum.
Mounting height:	40" from CL to finished floor.
Electric functions:	Can be interfaced with building security systems. Latch retraction, security monitoring, delayed egress and exit alarm available (EL fail-secure only). Subject to code requirements, state and local. (see pages 32-40 for details)
Fasteners:	All mounting screws are concealed. Furnished with all machine screws.
Sex bolts:	Required when used with wood, composite or non-reinforced hollow metal doors. For EO device, specify 4 - 425 (#10-24) SNB and 2 - 325 (1/4"-20) SNB. For devices with trim, specify 4 - 425 (#10-24) SNB.
ANSI:	Certified ANSI A156.3-2001 grade 1 standards.
Center case & working parts:	Investment-cast ferrous alloy with heavy wrought and sintered metal parts.
Shim kits:	For glass lite applications; 1/4" thick, specify SK24-R.

24-V Series

Vertical rod device

Panic exit hardware

High-traffic applications demand the added strength and protection that comes with a vertical rod device. The Falcon 24-V Series delivers with a surface-applied design that includes standard top latch and deadlocking. The narrow stile and sleek touch bar design ensure an attractive installation.



Specifications

Hand:	Field reversible.
Functions:	24-V-EO (exit only) has all functions built in. Order trim with the device, or add it later. (see trim selection chart on page 29)
Finishes:	US3 (605); US4 (606); US10 (612); US11 (643e); US15 (619); US19 (622); US26 (625); US26D (626); US32 (629); US32D (630); US28 (628), 313AN (710) (see page 29 for finishes)
Strikes:	3788 top strike is surface applied, 2130 bottom strike is mortised into floor.
Angle Bracket:	Use 4215 angle bracket in flush transom installations. Allow use of standard 3788 strike.
Latchbolt:	Top stainless steel, top latch $\frac{3}{4}$ " throw, bottom bolt $\frac{1}{2}$ " throw.
Deadlocking latchbolt:	Standard with top latch.
Latch retention hold:	Standard with top latch. On top latch.
Dogging feature:	Half turn hex dogging standard. No threaded parts to wear out.
Stock sizes:	See chart below.
Doors:	$1\frac{3}{4}$ " thick, wood or metal. Specify thickness if other than $1\frac{3}{4}$ " thick.
Projections:	$2\frac{3}{4}$ " maximum, 2" dogged.
Stile:	$1\frac{3}{4}$ " minimum when used in pairs.
Electric functions:	Can be interfaced with building security systems. Latch retraction, security monitoring, delayed egress and exit alarm available (EL fail-secure only). Subject to code requirements, state and local (see pages 32-40 for details).
Fasteners:	All mounting screws are concealed, sheet metal screws standard, machine screws available, specify AMS.
Sex bolts:	Recommended when device is used with hollow core wood, composite or light gauge hollow metal doors. For EO device, specify 8 - 425 (#10-24) SNB and 2 - 325 ($\frac{1}{4}$ "-20) SNB. For devices with trim, specify 8 - 425 (#10-24) SNB.
ANSI:	Certified ANSI A156.3-2001 grade 1 standards.
24-V:	Latch retention (LR) top latch and bottom square bolt. 3788 strike top, 2130 flush strike bottom.
24-V-LBR:	Less bottom rod vertical.
Vertical rods:	Furnished to length based on a 40" horizontal CL from finished floor and a 7'0" door standard. Variations from these standards must be specified when ordering.
Shim kits:	For glass lite applications; $\frac{1}{4}$ " thick, specify SK24-V.


Device	Door size	Door strike	Min stile (in)	Min door opening width
24-V	3'	All	$2\frac{1}{8}$ "	$2'7\frac{1}{4}$ "
24-V	4'	All	$2\frac{1}{8}$ "	$3'1\frac{1}{4}$ "

F-24-V Series

Vertical rod device

🔥 Fire exit hardware

When your application requires strength and durability, plus fire-rated performance, the F-24-V Series is the total package. This surface-applied vertical rod device includes a sleek touch bar design with top latch and deadlocking standard, as well as a narrow stile that fits where you need it to.

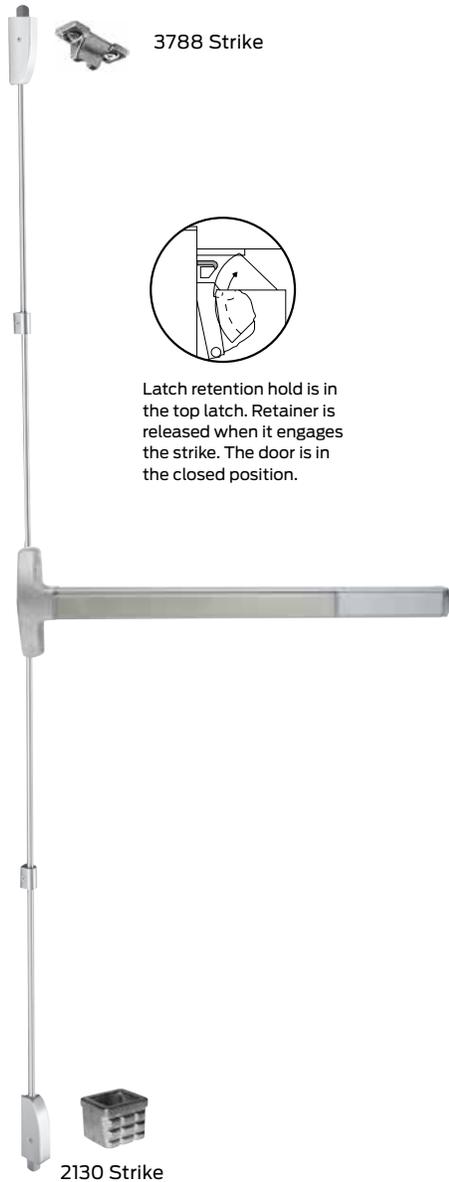

3788 Strike



Latch retention hold is in the top latch. Retainer is released when it engages the strike. The door is in the closed position.

2130 Strike

Specifications

Hand:	Field reversible.
UL:	"A" Label (3 hr) - double egress - 8' x 10'; 90 min. same egress - 8' x 10'. Wood door: 20 min. 8' x 10'; 90 min. 8' x 9'. Consult door manufacturer for maximum rating.
Functions:	F-24-V-EO (exit only) has all functions built in. Order trim with the device, or add it later (see trim selection chart on page 29).
Finishes:	US3 (605); US4 (606); US10 (612); US11 (643e); US15 (619); US19 (622); US26 (625); US26D (626); US32 (629); US32D (630); US28 (628), 313AN (710) (see page 29 for finishes)
Strikes:	3788 top strikes are surface applied, 2130 bottom strike is mortised into floor.
Latchbolt:	Top stainless steel, top latch $\frac{3}{4}$ " throw, bottom bolt $\frac{1}{2}$ " throw.
Latch retention hold:	Standard with top latch.
Deadlocking latchbolt:	Standard with top latch.
Stock sizes:	See chart below.
Doors:	$1\frac{3}{4}$ " thick, wood or metal. Specify thickness if other than $1\frac{3}{4}$ " thick.
Projections:	$2\frac{3}{4}$ " maximum.
Stile:	$2\frac{1}{8}$ " minimum when used in pairs.
Electric functions:	Can be interfaced with building security systems. Latch retraction, security monitoring, delayed egress and exit alarm available (EL fail-secure only). Subject to code requirements, state and local. (See pages 32-40 for details.)
Fasteners:	All mounting screws are concealed. All machine (AMS) standard.
Sex bolts:	Recommended when device is used with hollow core wood, composite or light gauge hollow metal doors. For EO device, specify 8 - 425 (#10-24) SNB and 2 - 325 ($\frac{1}{4}$ -20) SNB. For devices with trim, specify 8 - 425 (#10-24) SNB.
ANSI:	Certified ANSI A156.3-2001 grade 1 standards.
F-24-V:	Latch retention (LR) top latch and bottom square bolt. 3788 strike top, 2130 flush strike bottom.
F-24-V-LBR:	Less bottom rod vertical device. "A" Label (3 hr) - 8' x 8'; 90 min. same egress - 8' x 8'. Wood Door: 20 minute minimum - 8' x 8' openings. Consult door manufacturer for maximum rating.
Vertical rods:	Furnished to length based on a 40" horizontal CL from finished floor and a 7'0" door standard. Variations from these standards must be specified when ordering.
Shim kits:	For glass lite applications; $\frac{1}{4}$ " thick, specify SK24-V.

Device	Door size	Door strike	Min stile (in)	Min door opening width
F-24-V	3'	All	$2\frac{1}{8}$ "	$2'7\frac{1}{4}$ "
F-24-V	4'	All	$2\frac{1}{8}$ "	$3'1\frac{1}{4}$ "

24-C Series

Concealed vertical rod device

Panic exit hardware

Concealed vertical rods add strength to the door, while maintaining an attractive appearance. The Falcon 24-C Series concealed vertical rod device offers great value, clean styling, a versatile narrow stile design and the security benefits of two-point latching. Falcon's patented center slide mechanism allows easy rod adjustment in the field.



Specifications

Hand:	Field reversible or specify handing.
Functions:	See trim selection chart on page 29. Delta trim only.
Finishes:	US3 (605); US4 (606); US10 (612); US11 (643e); US15 (619); US19 (622); US26 (625); US26D (626); US32 (629); US32D (630); US28 (628), 313AN (710) (see page 29 for finishes).
Strikes:	4188 mortised top and 2130 flush strike bottom, optional bottom 2126A and 4155.
Latchbolt:	Top stainless steel, top latch $\frac{3}{4}$ " throw. Bottom bolt $\frac{1}{2}$ " throw.
Deadlocking latchbolt:	Standard with top latch.
Latch retention hold:	Standard with top latch.
Dogging feature:	Half turn hex dogging standard. No threaded parts to wear out.
Cylinder dogging:	Specify "CD" prefix. Uses $1\frac{1}{8}$ " long mortise cylinder dogging with standard cam.
Stock sizes:	See chart below.
Doors:	$1\frac{3}{4}$ " thick, wood or metal. Specify if other than $1\frac{3}{4}$ " thick.
Projections:	$2\frac{3}{4}$ " maximum, 2" dogged.
Stile:	$2\frac{1}{4}$ " minimum when used in pairs. (6" minimum on wood doors)
Electric functions:	Can be interfaced with building security systems. Latch retraction, security monitoring, delayed egress and exit alarm available (EL fail-secure only). Subject to code requirements, state and local (see pages 32-40 for details)
Fasteners:	All mounting screws are concealed, sheet metal screws standard, machine screws available, specify AMS.
Sex bolts:	Recommended when device is used with hollow core wood, composite or light gauge hollow metal doors. For EO device, specify 2 - 425 (#10-24) SNB and 2 - 325 ($\frac{1}{4}$ -20) SNB. For devices with trim, specify 2 - 425 (#10-24) SNB.
ANSI:	Certified ANSI A156.3-2001 grade 1 standards.
24-V-LBR:	Less bottom rod concealed vertical device.
Vertical rods:	Furnished to length based on 40" horizontal CL to finished floor and a 7'0" door. Variations from these standards must be specified when ordering.
Patented centerslide:	For ease of adjustment.
Shim kits:	Consult factory

Device	Door size	Door strike	Min stile (in)	Min door opening width
24-C	3'	All	$2\frac{1}{4}$ " (6" for wood doors)	$2'7\frac{3}{8}$ "
24-C	4'	All	$2\frac{1}{4}$ " (6" for wood doors)	$3'1\frac{3}{8}$ "

F-24-C Series

Concealed Vertical Rod Device

🔥 Fire Exit Hardware

The Falcon F-24-C Series device lets you combine the safety of a fire-rated device with the clean aesthetics that come with a narrow stile and concealed vertical rod installation. In-field adjustment is simple thanks to our patented center slide mechanism. Two-point latching ensures optimal security at the door.



Specifications

Hand:	Field reversible.
UL:	"A" Label (3 hr) - double egress - 8' x 10'; 90 min. same egress - 8' x 10'.
Functions:	See trim selection chart on page 29. Delta trim only.
Finishes:	US3 (605); US4 (606); US10 (612); US11 (643e); US15 (619); US19 (622); US26 (625); US26D (626); US32 (629); US32D (630); US28 (628), 313AN (710) (see page 29 for finishes).
Strikes:	4188 mortised top, 2130 flush strike bottom.
Latchbolt:	Top stainless steel, $\frac{3}{4}$ " throw. Bottom bolt $\frac{1}{2}$ " throw.
Latch retention hold:	Standard with top latch.
Deadlocking latchbolt:	Standard with top latch.
Stock sizes:	See chart below.
Doors:	1 $\frac{3}{4}$ " thick metal. Specify if other than 1 $\frac{3}{4}$ " thick.
Projections:	2 $\frac{3}{4}$ " maximum.
Stile:	2 $\frac{1}{4}$ " minimum when used in pairs. (6" minimum on wood doors)
Electric functions:	Can be interfaced with building security systems. Latch retraction, security monitoring, delayed egress and exit alarm available (EL fail-secure only). Subject to code requirements, state and local (see pages 32-40 for details).
Fasteners:	All mounting screws are concealed. All machine screws standard.
Sex bolts:	Required when used with wood, composite or non-reinforced hollow metal doors. For EO device specify 2 - 425 (#10-24) SNB and 2 - 325 ($\frac{1}{4}$ "-20) SNB. For devices with trim, specify 2 - 425 (#10-24) SNB.
ANSI:	Certified ANSI A156.3-2001 grade 1 standards.
F-24-C-LBR:	Less bottom rod concealed vertical device. "A" Label (3 hr) - 8' x 8'; 90 min. same egress - 8' x 8'.
Vertical rods:	Furnished to length based on 40" horizontal CL to finished floor and a 7'0" door. Variations from these standards must be specified when ordering.
Patented centerslide:	For ease of adjustment.
Shim kits:	Consult factory.

Device	Door size	Door strike	Min stile (in)	Min door opening width
F-24-C	3'	All	2 $\frac{1}{4}$ " (6" for wood doors)	2' 7 $\frac{3}{8}$ "
F-24-C	4'	All	2 $\frac{1}{4}$ " (6" for wood doors)	3' 1 $\frac{3}{8}$ "

24 Series

Accessories and options



4023 Shown

Removable mullion

- The 2923, 4023, KR4023 and 4423 steel mullions are for use with the 24-R devices on double door openings. Advantage: Increased security and tighter closure. Minimizes door warpage and sag. Regulates the flow of in-and-out traffic
- Removable mullions are easily removed and reinstalled for full width access
- Rim devices are used on both leaves, attaining a perfectly symmetrical opening
- The mullion assembly consists of a mullion, top and bottom mounting brackets and a screw pack. Soffit adapters are available for use with either the 2923, 4423 or the 4023 mullion
- Strikes are not furnished with the mullion (except 4423). Please see page 27 for strike information
- Mullions may be cut on the job for doors under stock lengths

24-R Double door application

Strike	Installed with mullion	Min stile	B*
299	2923	3 1/2"	2 3/16"
299	4023	4"	2 7/16"
264	2923	3 3/8"	2 1/16"
264	4023	3 5/8"	2 5/16"
1439	2923	3 7/16"	1 7/8"
1439	4023	3 11/16"	2 1/8"
1606	2923	3 5/16"	1 7/8"
1606	4023	3 11/16"	2 1/8"
4396	4423	2 1/8"	1 1/8"

Mullion features


- Mullion fittings – ductile iron
- 4023 – 2" x 3" x height
- KR4023 cylinder removable mullion – 2" x 3" x height and uses 1 1/4" mortise cylinder not furnished
- 2923 mullion – 1 1/2" x 2 1/2" x height
- 423 mullion – T shape (1" on latch edge) supplied with 4396 adjustable strike
- Prime coat only
- 7' or 8' door opening standard, other door opening as specified

Cylinders - control trim

- Cylinder supplied only when specified.
- Cylinders available keyed alike.

Sex bolts

- 325 (1/4"-20 thread)
- 425 (#10-24 thread)



Cylinder reference

Device	Trim	Standard key cylinder	IC key cylinder
24 Series device	Cylinder dogging	985 - 1 1/8" Mortise cylinder	C987 - 1 3/8" Mortise cylinder (Blocking ring plus security collar must equal 1/4" thick)
24 Series trims	L, K	986 - Mortise cylinder	C987 - Mortise cylinder
24 Series trims	NL - Rim and surface vertical 718C, 718NL	951 - Rim cylinder	C953 - Rim cylinder
24 Series trims	Concealed 718C, 718NL	986 - 1 1/4" Mortise cylinder *4831 cam for trim prior to 2/28/12; B520 - 731 cam for trim after 2/28/12	C987 - 1 3/8" mortise cylinder (blocking ring plus security collar must equal 1/4")

24 Series

Accessories and strikes

Strikes

For rim devices



264
2 7/8" x 1 1/4" x 9/16"
(H x W x D)
Panic device only.



299
7 7/8" x 1 1/4" x 13/16"
(H x W x D)
Panic device only.



299F
2 7/8" x 1 1/4" x 13/16"
(H x W x D)



1606
2 7/8" x 1 3/8" x 3/8"
(H x W x D)
Panic device only.



1439 Blade stop
1 3/4" x 1 7/8" x 1/2"
(H x W x D)
Panic device only.

For surface and concealed vertical rod devices



2130
(F)24-V and (F)24-C
standard bottom
strike for grouting
into concrete or
masonry floors.



3788
Furnished top
of (F)24-V.




4155
Optional strike.
Panic device only.



4188
Top strike for
(F)24-C.

Accessories



4215
Angle bracket for flush transom applications.
Does not require elimination of latch
retention feature. Accepts 3788 strike for
24-V device.



Surface vertical extension rods


Extension rods are available in 12", 24" and 36" lengths in all finishes. Both ends tapped and all-thread included as connector.



Concealed extension rods

Extension rods are available in 12", 24" and 36". Both ends have pressed-in, threaded inserts.

Filler plates

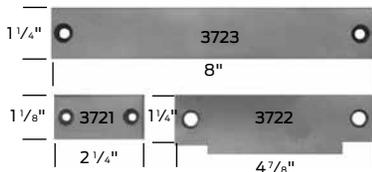

3721/3722/3723

Steel filler plates

- 3721 Cylindrical lock front filler
- 3722 Strike filler - set no. SC for 161 cutout
- 3723 Mortise lock front filler
- 3722 Strike filler - set no. SM for 86 cutout

24 Series


Trim designs

Lever trims (712L)



712L
712L/NL

712L/DT
712L/BE



Lever designs



Avalon (AVA)
Projection 3 1/4"



Quantum (QUA)
Projection 3 1/4"



Dane (DAN)
Projection 3"



Broadway (BRW)
Projection 3 1/5"



Boardwalk (BRK)
Projection 3 1/5"



Danish (DSH)
Projection 2 9/10"



Latitude (LAT)
Projection 3 1/10"



Longitude (LON)
Projection 3 1/10"



Sutro (SUT)
Projection 3 1/4"

Knob trim (711K)



711K
711-NL

Round ball knob
Escutcheon: 8 1/8" x 1 7/8"
Projection: 3 7/8"
Brass

For keyed functions, see page 26 for cylinder requirements.

Athena (715)



715DT

Grip overall: 9 1/8"
Width: 1 1/16"
Pull: 6 1/4" C x C
Projection: 2 1/4"

All levers return to within 1/2" of door.

Escutcheon: 8 1/8" (H) x 1 7/8" (W) (specify handing) brass finish.

Protected by easily replaceable shear pin.

Lever is reversible, supplied RHR if not specified. For keyed functions, see page 26 for cylinder requirements.

Delta trims

1 1/8" Mortise
cylinder



718DT

1" Cylinder



718C



718NL



717DT



718TL



718TL-BE

Specify handing
Escutcheon: 8 1/8" x 1 7/8"
Projection: 2 1/4"
All Delta pulls: 6 1/4" C x C
NL and DT: 14 1/16" x 2 1/4"

Cylinder information

Key retracts latch bolt.
Cylinder sold separately
(see page 26).

Brass and/or plated finishes.

For cylinder information see page 26.
When locking function is not required,
specify trim by (BE) blank escutcheon.

24 Series

Trim chart & finish chart

Function

	Lock/ unlock	NL	DT	BE	FSA/ FSE
Lever ¹ (712)	712L	712L-NL	712L-DT	12L-BE	
Knob (711)	711K	711K-NL	—	711K_BE	
Delta (717)	—	—	717DT	—	
Delta (718)	—	718NL	718DT	—	718C
Athena (715)	—	—	715DT		

¹ Specify hand.




24 Series finishes

	Color	US number	BHMA number
	Brass, bright	US3	605
	Brass, satin	US4	606
	Bronze, satin	US10	612
	Bronze, aged	US11	643e*
	Nickel, satin	US15	619*
	Black, matte	US19	622*
	Chromium, bright	US26	625
	Chromium, satin	US26D	626
	Anodized aluminum	US28	628
	Stainless Steel, bright	US32	629
	Stainless Steel, satin	US32D	630
	Anodized duranodic	313AN	710

*Available on select devices and trims

24 Series

Types and functions

	Rim devices ANSI type 4	Vertical rod devices ANSI type 5	Concealed vertical rod devices ANSI type 6
Functions (ANSI)	(F)-24-R	(F)- 24-V	(F)-24-C
EO (01) Exit only, no trim.	 24-R-EO	 24-V-EO	 24-C-EO
DT (02) Entrance by trim when actuating bar is locked down. Note: Fire exit devices cannot be dogged down. Some codes permit electric dogging with fail secure circuitry.	 24-R-DT	 24-V-DT	 24-C-DT
NL (03) Entrance by trim when latchbolt is retracted by key. Key removable only when locked.	 24-R-NL	 24-V-NL	 24-C-NL
	Rim devices ANSI type 4	Vertical rod devices ANSI type 5	Concealed vertical rod devices ANSI type 6
	(F)-24-R	(F)- 24-V	(F)-24-C
L or K (08) Entrance by knob or lever. Key locks or unlocks knob.	 24-R-L or K	 24-V-L or K	 24-C-L or K
L (NL) or K (NL) (09) Entrance by knob or lever only when released by key. Key removable only when locked.	 24-R-L or K(NL)	 24-V-L or K(NL)	 24-C-L or K(NL)

24 Series

Door application



Label doors

Falcon models F-24-R, F-24-C and F-24-V are labeled for use as  fire exit hardware.

Door thickness

All devices and components supplied for 1 3/4" – 3'0" x 7'0" doors standard. Specify door thickness if other than 1 3/4".

Door application chart

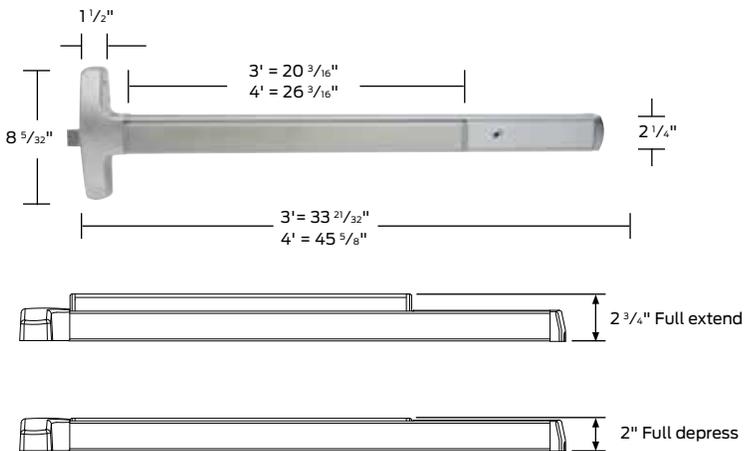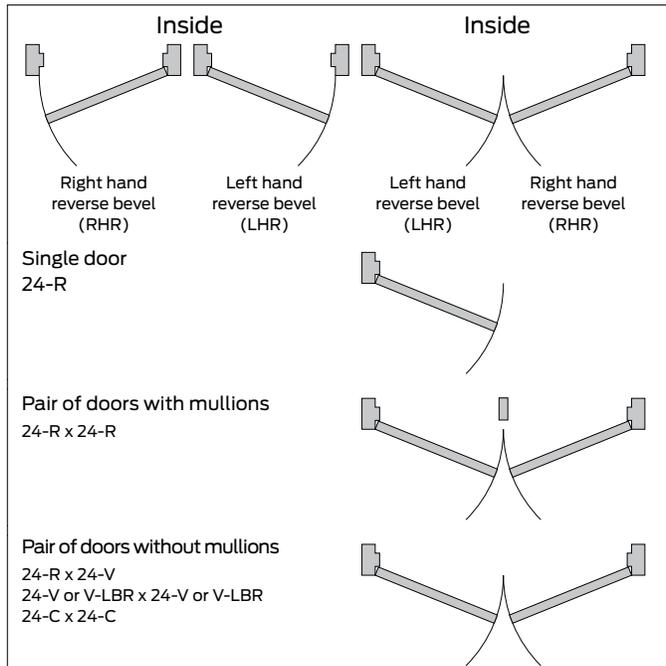

Product information and specifications contained in this catalog are subject to change without notice. Please consult the factory.

Electric latch retraction

Electric latch retraction (EL) for all 24 and 25 Series devices

The Electric latch retraction (EL) feature provides control of latch retraction by guard or security system, allowing free entrance from outside or trim side of door. The EL system can be activated to hold the latch open momentarily or for extended periods of time, and can be interfaced with automatic doors, card readers, automatic fire alarm systems, etc.



The Electric latch retraction (EL) feature provides control of latch retraction by guard or security system, allowing free entrance from outside or trim side of door. The EL system can be activated to hold the latch open momentarily or for extended periods of time, and can be interfaced with automatic doors, card readers, automatic fire alarm systems, etc.

EL system requirements:

- The EL application requires the use of the PS914-2RS power supply (see page 32 for more details).
- Power transfer hinge or electric power transfer required.
Solenoid rated for continuous-duty operation with PS914-2RS (required power supply).

Functional options:

Electric latch retraction can be used in conjunction with FSA / FSE (Fail safe/Fail secure).

Security monitoring (DM, LM, RX, LK) features; EL feature is available on all 24/25 series standard device specifications.

Common application options:

Battery backup: For applications that require power even when power is lost the battery backup option will assure power to your EL device. For proper functionality use the PS914 power supply with the -BB option. Use suffix “-BB” for factory installed; example PS914-BB (see page 32 for more details).

Fire alarm: This function coordinates the electric latch retraction of one or two devices with the fire alarm. For proper functionality use the PS914 power supply with the -FA option. Use suffix “-FA” for factory installed; example PS914-FA (see page 32 for more details).

Auto operator: This function coordinates the electric latch retraction of one or two devices, and signals an auto-operator to open a door. Signaling the auto operator can be performed in two methods: by receiving a signal from a monitoring switch that the lock is unlatched, or upon expiration of a time delay triggered by an “AE” type input switch. For proper functionality use the PS914 power supply with the -4RL option. Use suffix “-4RL” for factory installed; example PS914-4RL (see page 32 for more details).

Time delay: A four zone controller with time delay provides four inputs and four outputs with the time delay. Time delay is field selectable from 0 to 75 seconds, in intervals of 5 seconds. For proper functionality use the PS914 power supply with the -4RL option. Use suffix “-4RL” for factory installed; example PS914-4RL (see page 32 for more details).


How to order:

To order the EL feature add “EL” prefix to device designation. (example: EL-25-R-EO)

Electric latch retraction

Application and wiring / power transfer hinge

Application and wiring - Electric latch retraction (EL)

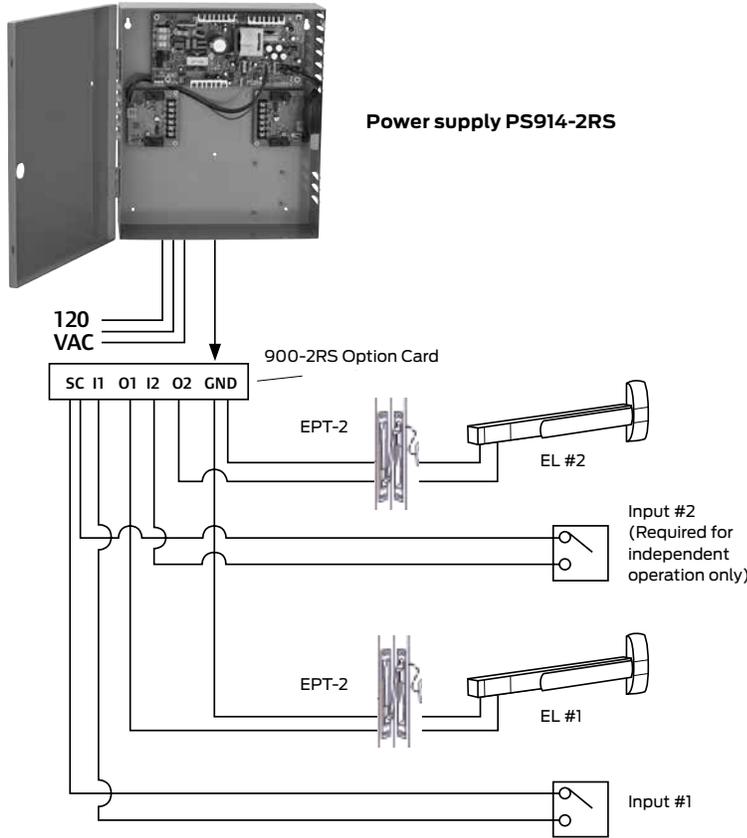

Device	Door size	Door strike	Min stile (in)	Min door opening width
EL-25-R	3'	299	4"	2' 9 ³ / ₈ "
		264	3 ⁷ / ₈ "	2' 9 ⁵ / ₈ "
		1439	3 ¹ / ₄ "	2' 9"
		1606	3 ⁵ / ₈ "	2' 9 ³ / ₈ "
EL-25-R	4'	299	4"	3' 3 ³ / ₄ "
		264	3 ⁷ / ₈ "	3' 3 ⁵ / ₈ "
		1439	3 ³ / ₄ "	3' 1 ¹ / ₂ "
		1606	3 ⁵ / ₈ "	3' 3 ³ / ₈ "
EL-24-R	3'	299	3 ¹ / ₂ "	2' 9 ³ / ₄ "
		264	3 ³ / ₈ "	2' 9 ⁵ / ₈ "
		1439	2 ¹ / ₄ "	2' 9"
		1606	2 ³ / ₄ "	2' 9 ³ / ₈ "
EL-24-R	4'	299	3 ¹ / ₂ "	3' 3 ³ / ₄ "
		264	3 ³ / ₈ "	3' 3 ⁵ / ₈ "
		1439	2 ³ / ₄ "	3' 3 ³ / ₈ "
		1606	2 ³ / ₄ "	3' 3 ³ / ₈ "
EL-25-V	3'	All	3 ¹ / ₂ "	2' 9 ³ / ₈ "
EL-25-V	4'	All	3 ¹ / ₂ "	3' 3 ³ / ₈ "
EL-24-V	3'	All	2 ¹ / ₈ "	2' 9 ³ / ₈ "
EL-24-V	4'	All	2 ¹ / ₈ "	3' 3 ³ / ₈ "
EL-25-C	3'	All	3 ¹ / ₂ "	2' 9 ³ / ₈ "
EL-25-C	4'	All	3 ¹ / ₂ "	3' 3 ³ / ₈ "
EL-24-C	3'	All	2 ¹ / ₄ "	2' 9 ⁵ / ₈ "
EL-24-C	4'	All	2 ¹ / ₄ "	3' 3 ⁵ / ₈ "
EL-25-M	3'	All	4 ¹ / ₂ "	2' 9 ³ / ₄ "
EL-25-M	4'	All	4 ¹ / ₂ "	3' 4 ¹ / ₄ "

Power transfer hinge - electric latch retraction (EL)

An EPT provides a wiring path from the door to the frame. To run power from your power supply to your Falcon 24 or 25 EL device, an EPT can be utilized. Door and frame must be factory prepped.

Options

EPT-2: Used for two 18AWG wires with a max rating of 24VDC, 5A or 120 VAC NEC class 3.

EPT can be used for:	EPT cannot be used for:
Door thickness - 1 ³ / ₄ " minimum	1 ¹ / ₂ " offset pivots
Note: The following specifications only apply to a 1 ³ / ₄ " thick door	Larger than 6" butt hinges
0-130 degree opening with up to 5 ¹ / ₄ " butt hinges	Pocket Pivots
0-130 degree opening with up to 5 ¹ / ₄ " butt hinges	Swing Clear Hinges
0-130 degree opening with up to 5 ¹ / ₄ " butt hinges	Center Hung Doors (center pivot)
0-130 degree opening with up to 5 ¹ / ₄ " butt hinges	Balanced Door

Delayed egress system components

For all 24 and 25 Series

The delayed egress system provides control for limited egress and high security areas which require accident hazard or fire exit hardware.

Delayed egress function

When the delayed egress system is armed, the mag lock(s) will remain secure against attempted override pressure and severe impacts. Ingress requires an operational trim, along with access control input (i.e. card reader, key switch, keypad). The system is required to be tied into local fire alarm system.



A complete delayed egress system requires the following components:

- DE5101 is used in delayed exit application and is ideal for controlled areas.
- Key switch operator
- Arm, disarm, reset and bypass the delayed egress system by the mortise cylinder on the dialogue box. (1-1/4" mortise cylinder sold separately.)
- LED status indicator
- Red LED indicates arm. Disarm and alarm status.
- Alarm horn
- Depression of the Falcon 24 or 25 RX device touchpad initiates a local alarm of 100 dB when armed.

Falcon 25 Series device with RX switch

PS902 Power supply

- PS902 - The series PS902 power supply is the recommended power supply for use with the delayed egress system. The series PS902 power supply is designed for electric locking or monitoring on single or double door applications. The output power is field selectable for either 24 VDC@1 ampere or 12 VDC@2 ampere. Standard input 120 VAC@0.6 ampere and 240 VAC@3.0 ampere available. The terminal block will accept up to 14 gauge stranded wire (see page 32 for more information).

PS914 Power supply

- PS914 - The series PS914 power supply can be safely used with the delayed egress system (see page 32 for more information).

Power transfer hinge or electric power transfer - See page 41 for more information.

Magnetic locks - Schlage electronics M420, M450 or M490 maintains UL listing.


How to order:

All components above are sold separately. To order, specify each component to complete a delayed egress system for your application.

Application and wiring

Popular delayed egress diagram

Device	Door size	Door strike	Min stile (in)	Min door opening width
25-R	3'	299	4"	2' 7 ³ / ₈ "
		264	3 ⁷ / ₈ "	2' 7 ³ / ₈ "
		1439	3 ¹ / ₄ "	2' 6 ³ / ₄ "
		1606	3 ⁵ / ₈ "	2' 7 ¹ / ₈ "
25-R	4'	299	4"	3' 1 ¹ / ₂ "
		264	3 ⁷ / ₈ "	3' 1 ³ / ₈ "
		1439	3 ³ / ₄ "	3' 1 ¹ / ₄ "
		1606	3 ⁵ / ₈ "	3' 1 ¹ / ₈ "
24-R	3'	299	3 ¹ / ₂ "	2' 7 ¹ / ₂ "
		264	3 ³ / ₈ "	2' 7 ³ / ₈ "
		1439	2 ¹ / ₄ "	2' 6 ³ / ₄ "
		1606	2 ³ / ₄ "	2' 7 ¹ / ₈ "
24-R	4'	299	3 ¹ / ₂ "	3' 1 ¹ / ₂ "
		264	3 ³ / ₈ "	3' 1 ³ / ₈ "
		1439	2 ³ / ₄ "	3' 1 ¹ / ₈ "
		1606	2 ³ / ₄ "	3' 1 ¹ / ₈ "
25-C	3'	All	3 ¹ / ₂ "	2' 7 ¹ / ₈ "
25-C	4'	All	3 ¹ / ₂ "	3' 1 ¹ / ₈ "
25-C	3'	All	2 ¹ / ₄ "	2' 7 ³ / ₈ "
25-C	4'	All	2 ¹ / ₄ "	3' 1 ³ / ₈ "
25-M	3'	All	4 ¹ / ₂ "	2' 7 ¹ / ₂ "
25-M	4'	All	4 ¹ / ₂ "	3' 2"

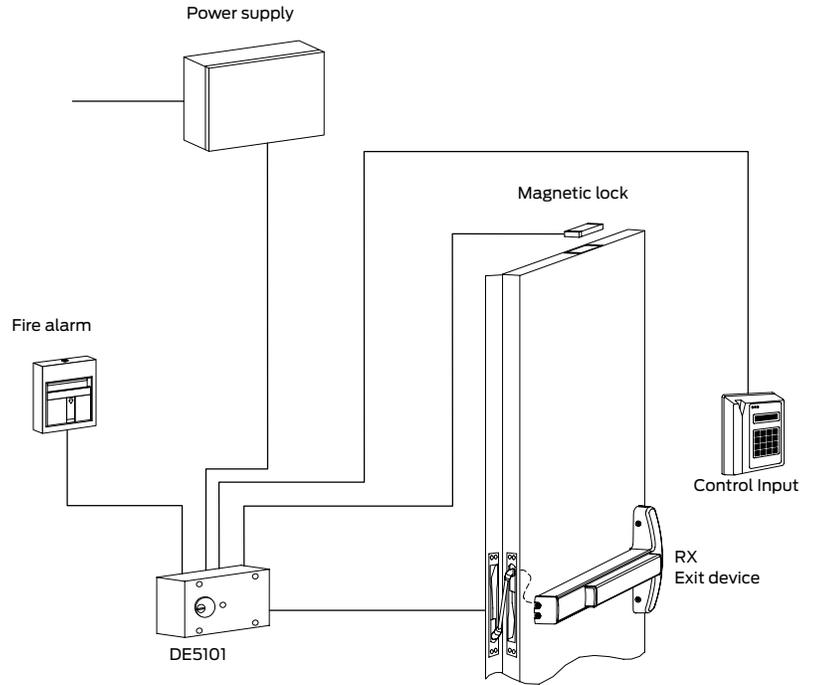

Electric lock/ unlock trim

Electric lock/ unlock trim (FSA/FSE) for 25 Series

The electric lock/unlock (FSA/FSE) feature allows the controlling of trim while still maintaining free egress at all times. The lock/unlock command can be controlled by a security system, fire alarm system, key switch, card reader, push button or touchpad.

FSA (Fail safe—unlocks when power is interrupted) can be used in areas requiring doors to be unlocked due to fire, power failure or emergency situations. (Examples: stairwells, hospitals, fire exits, etc.)

FSE (Fail secure—locks when power is interrupted) can be used in areas requiring doors to be locked for security reasons and only unlocked when energized by authorized personnel. (examples: banks, inner-office, etc.) With either feature, authorized personnel can gain access utilizing key by overriding or bypassing electric locking function.



Specifications

- Solenoid rated for continuous duty at 24V DC 0.4 amps.
- UL listed devices.
- Device channel is used as conduit on 25 Series devices.
- Power transfer (EPT-2) hinge 2-wire minimum rated 1/2 Amp.
- See page 35 for more information

Wire chart

Length of wire run (ft.)	24VDC 0.4 AMPS
0-500	18AWG
501-700	16AWG

How to order

To order FSA/FSE feature, add FSA or FSE prefix to device designation. (Example: FSA 25-R-L)

Note:

1. FSA/FSE can be used on all devices.
2. The FSA/FSE feature can be used in conjunction with EL (Electric latch retraction), EA (exit alarm) and security monitoring (DM, LM, RX).

Minimum power supply- PS902

- The series 902 power supply is the recommended power supply for use with an FSA or FSE trim. The series 902 power supply is also designed for electric locking or monitoring of single or double door applications.
- See page 32 for more information

Exit alarm

Exit alarm (EA) - for all 24 and 25 Series devices

The Exit alarm (EA) feature provides a battery powered exit alarm to allow for a simple and effective means of monitoring the use of exits while still maintaining means of egress (for code requirements). When the touchbar is depressed the alarm will sound continuously, indicating that the exit has been engaged. The exit alarm can only be reset by way of a standard 1 1/4" mortise cylinder with standard "A" cam (5/16" wide x 3/4" long). The design of the unit will allow the single 9V battery to last for at least six months (on standby mode).



Minimum door width required for standard devices

Device	Door size	Door strike	Min stile (in)	Min door opening width
EA-25-R	3'	299	4"	2' 9 1/4"
		264	3 7/8"	2' 9 1/8"
		1439	3 1/4"	2' 8 3/8"
		1606	3 5/8"	2' 8 7/8"
EA-25-R	4'	299	4"	3' 3 1/4"
		264	3 7/8"	3' 3 1/8"
		1439	3 1/4"	3' 3"
		1606	3 5/8"	3' 2 7/8"
EA-24-R	3'	299	3 1/2"	2' 9 1/4"
		264	3 3/8"	2' 9 1/8"
		1439	2 1/4"	2' 8 3/8"
		1606	2 3/4"	2' 8 7/8"
EA-24-R	4'	299	3 1/2"	3' 3 1/4"
		264	3 3/8"	3' 3 1/8"
		1439	2 3/4"	3' 3 7/8"
		1606	2 3/4"	3' 3 7/8"
EA-25-V	3'	All	3 1/2"	2' 8 7/8"
EA-25-V	4'	All	3 1/2"	3' 2 7/8"
EA-24-V	3'	All	2 1/8"	2' 8 7/8"
EA-24-V	4'	All	2 1/8"	3' 2 7/8"
EA-25-C	3'	All	3 1/2"	2' 8 7/8"
EA-25-C	4'	All	3 1/2"	3' 2 7/8"
EA-24-C	3'	All	2 1/4"	2' 9 1/8"
EA-24-C	4'	All	2 1/4"	3' 3 1/8"
EA-25-M	3'	All	4 1/2"	2' 9 1/4"
EA-25-M	4'	All	4 1/2"	3' 3 1/4"

Specifications

- Works with rim, mortise, concealed, surface vertical rod
- UL listed
- The EA feature can be used in conjunction with FSA/FSE (Fail safe/Fail secure) and security monitoring (DM, LM, RX) features.

Features and benefits

- 110 dB alarm
- 24 Volt hardwire option
- 9V Battery input
- External inhibit for card reader
- LED indication
 - Armed
 - Disarmed
 - Low battery
 - EAK retrofit kit available for your existing devices

How to order

To order EA feature add "EA" prefix to device designation. (example: EA-25-R-EO)

To order EAK (exit alarm kit) feature order "EAK" plus device length (3' or 4'), type of device (24 or 25 Series) and the finish of your existing device. (example: EAK-4', 24 Series, US10)
(For retrofit application)

Minimum power supply - PS902

The series PS902 power supply is the recommended power supply for use with the exit alarm (EA) option. The series PS902 power supply is designed for electric locking or monitoring on single or double door applications (see page 32 for more information).

Device monitoring

Device monitoring for most 24 and all 25 Series devices*

All of the monitoring features available from Falcon provide total flexibility and will interface with any security system. All monitoring switches are dry contact type and are contained within the device, allowing for tamper-resistant operation. Security monitoring features allow monitoring of devices, latches, authorized egress and locking levers. A key override option is available. All of the security monitoring features can be used in any combination with any other Falcon feature. Consult factory for special applications.

***DM, *LM, RX Monitoring**

- The DM (device monitor) feature monitors full latch projection. If the latchbolt is retracted by use of device, or someone tampers with the latchbolt, the switch is activated sending a signal to controlling areas. In devices with the deadlock feature, the deadlatch status is monitored.
- The LM (Latch monitor) feature monitors full latchbolt retraction. When the latchbolt is fully retracted a signal is sent indicating door (or device) opened status.
- The RX feature monitors the depression of the touch bar or crossbar. Activation of the switch indicates use of a door or that the door is in the dogged condition. This feature is especially useful when used to activate or shunt magnetic locking systems.
- *LM/DM not available on F-24-R.

How to order

To order any individual or combination of monitor feature(s) add the respective prefix(s) to device designation. (example: EL-RX-DM-25-V-L-DANE)

Key override option (KOR)

The KOR feature allows authorized personnel to override monitoring features on a door by use of a keyed 1 1/8" mortise cylinder with 5/16" wide x 3/4" long standard cam (mortise cylinder not supplied).

Activating KOR feature allows any feature to be disabled for daytime use or when desired by key holder. This is a maintained contact switch. KOR is especially useful for turning on or off magnetic locking systems and electric dogging control (at the door).

This feature is not available with EA feature, cylinder/standard dogging.

To order KOR feature add KOR prefix to device designation. (example: KOR-DM-24-R-TP)

Note: Use of these features may require a power transfer hinge (supplied by others) or additional wires in the power transfer hinge needed for application when combined with other electrified features.

Power supply



The PS900 Series is a consolidated line of power supplies and accessories that offer enhanced flexibility and functionality specific to the changing needs of the access control market. The PS900 Series can be used in a variety of applications to convert high voltage AC power into the low voltage DC outputs required by most access control devices. The PS900 Series protects devices downstream by providing Class 2*, filtered and regulated power. The full line is UL294 certified.

Note: PS906 can provide Class 2 rated outputs when used with 900-8P distribution board.

Features:

- Constant output rating at both 12 VDC and 24 VDC provides superior performance; includes field selectable jumper
- Polarized connectors for option boards eliminate need for racks and side connectors
- Flat mounting of option boards provides easier access to terminal blocks for connection of electrified devices
- High voltage protective cover
- Battery back-up board auto-selects voltage
- Fire alarm relay can be configured to provide either switched or un-switched outputs from a power supply
- PS914 designed with high inrush current for powering electrified panic devices
- Universal 120-240 VAC input
- Low voltage DC, regulated and filtered
- Electronic power limiting foldback circuit for AC current overload protection
- Fused primary input
- AC status monitor- isolated SPDT contacts
- AC input and DC output LED status indicators
- Cover mounted AC input indication
- Hinged cover with lock down screws

Certifications:

- UL 294 certified—the standard for access control
- Class 2 rated*
* Except PS906, output rating exceeds Class 2 power limits

Once power is converted to low voltage DC, the PS900

Series offers a variety of distribution options, including basic fuse protection, simple relay, and advanced logic providing complex sequencing and timing functions.

* PS906 can provide Class 2 rated outputs when used with 900-8P distribution board.

	PS902	PS904	PS906	PS914
Number of connectors on power supply for the following:	2 amps	4 amps	6 amps	4 amps
Distribution boards	1	2	3	2
Battery back-up board	1	1	1	1

Note: One fire alarm board can be connected directly to the PS902. If a fire alarm board is desired for the PS904, PS906 or PS914 it can be connected to a distribution board.

Applications:

The PS900 Series of power supplies works with many electrified devices including Falcon exit devices, electromagnetic locks, hardwired locks, electrified mechanical locks, electrified strikes and many other products.

Accessories:

The PS900 Series features seven option boards for use in a variety of applications. All PS900 Series power supplies option boards are UL 294 certified.

Option boards:

900-4R: 4 relay controlled output board to power multiple devices.

900-4RL: 4 relay distribution board with logic is field configurable for time delay function, auto operator, security interlock.

900-8F: Provides 8 individually fuse-protected outputs, giving the flexibility to power multiple devices and provide another layer of protection.

900-FA: Emergency interface relay integrates with fire alarm and is used to cut power in case of emergency.

900-BB: Battery backup.

900-2RS: 2 relay EL panic device control board (PS914 only).

900-BBK: Battery backup kit includes two 7A/hr batteries and provides up to four hours of backup power when cycled every 5 minutes at full load.

Wire selection size/type

Run length	EL device w/EPT or door loop
0-100 ft	14 gauge standard wire
101-200 ft	12 gauge standard wire
Run length	EL device w/electric hinge/pivot
0-75 ft	14 gauge standard wire
76-150 ft	12 gauge standard wire
Wire selection	Switch wire size
1200 ft max.	16 gauge

Electrical options summary

Electrical options matrix - 25 Series

Option	Electric dogging	Electric latch retraction (EL)	Delayed egress	Electric lock /unlock trim (FSA/FSE)	Device monitor (DM)	Latch monitor (LM)	Authorized egress (RX)	Key override (KOR)	Exit alarm /hard wire (EA/ HWEA)
Electric latch retraction (EL)	X	—	V	V	V	V	V	X	X
Delayed egress	V	V	—	V	V	V	V	V	V
Electric lock/unlock trim (FSA/FSE)	V	V	V	—	V	V	V	V	V
Device monitor (DM)	V	V	V	V	—	V	V	V	V
Latch monitor (LM)	V	V	V	V	V	—	V	V	V
Request to exit (RX)	V	V	V	V	V	V	—	V	V
Key override (KOR)	X	X	V	V	V	V	V	—	X
Exit a larm (EA)	X	X	V	V	V	V	V	X	—

Electrical options matrix - 24 Series

Option	Electric dogging	Electric latch retraction (EL)	Delayed egress	Device monitor (DM)	Latch monitor (LM)	Authorized egress (RX)	Key override (KOR)	Exit alarm /hard wire (EA/ HWEA)
Electric latch retraction (EL)	X	—	V	V	V	V	X	X
Delayed egress	V	V	—	V	V	V	V	V
Device monitor (DM)	V	V	V	—	V	V	V	V
Latch monitor (LM)	V	V	V	V	—	V	V	V
Request to exit (RX)	V	V	V	V	V	—	V	V
Key override (KOR)	X	X	V	V	V	V	—	X
Exit alarm (EA)	X	X	V	V	V	V	X	—

*Not available on F-24-R

V = works with

X = doesn't work

How to order

25 Series

	EL	F	25	V	L-DANE	US3	3'	LHR	LBR	SNB	WD
Prefixes											
CD	Cylinder dogging										
RX	Touchbar request to exit										
DM	Latchbolt and device monitor switch										
EA	Exit alarm										
KOR	Key bypass switch										
LD	Less dogging										
LM	Latchbolt status switch										
EL	Electric latch retraction										
FSA	Electric lock or unlock trim-fail safe										
FSE	Electric lock or unlock trim-fail secure										
Rating											
F	Fire exit hardware										
Blank	Panic exit hardware										
Device series											
25	Touch bar device, wide stile										
Device type											
R	Rim			C-WDC		Concealed vertical rod wood door (20 or 90 min)					
V	Surface vertical rod										
C	Concealed vertical rod			M		Mortise					
Trim function (see trim pages for all functions)											
EO	Exit only			K		Knob					
DT	Dummy trim			L		Lever (Dane standard)					
NL	Night latch			C		Cylinder prim plate					
NL-OP	Night latch optional pull			511-L		VR trim					
TP	Thumbpiece										
Finish											
US3	US10	US11	US15	US19	US26						
US32	US28	US4	US26D	US32D	313AN						
Door width											
3'	Standard default			Door thickness							
4'				1 3/4" Standard							
				2 1/4" Optional							
Handing											
RHR	Right hand reverse										
LHR	Left hand reverse										
Less bottom rod											
LBR	Less bottom rod										
Accessories											
CYL	Cylinder			SNB		Sex bolts					
SK	Shim kit			AMS		All machine screws (for vertical and concealed only)					
Other miscellaneous door information											
HMD	Hollow metal door			—		Door thickness					
HMF	Hollow metal frame			—		Door undercut					
WD	Wood door			—		Door label					
WDF	Wood frame			—		Stile width					
ALD	Aluminum door			—		Frame stop height					
ALF	Aluminum frame			SGL		Single door					
SCDC	Steel channel door construction			PR		Pair of doors swinging same direction					
—	Specify other door or frame										
—	Material information										
—	Door height										

How to order

24 Series

	EL	F	24	V	L-DANE	US3	3'	LHR	LBR	SNB	WD
Prefixes											
CD	Cylinder dogging										
RX	Touchbar request to exit										
DL	Deadlocking										
DM	Latchbolt and device monitor switch										
EA	Exit alarm										
KOR	Key bypass switch										
LD	Less dogging										
LM	Latchbolt status switch										
EL	Electric latch retraction										
Rating											
F	Fire exit hardware										
Blank	Panic exit hardware										
Device series											
24	Touch bar device, narrow stile										
Device type											
R	Rim					C	Concealed vertical rod				
V	Surface vertical rod					C-WDC	Concealed vertical rod wood door (20 or 90 min)				
Trim function (see trim pages for all functions)											
EO	Exit only					K	Knob				
DT	Dummy trim					L	Lever (Dane standard)				
NL	Night latch										
C	Cylinder trim less pull										
Finish											
US3	US10	US26	US32	313AN							
US4	US26D	US32D	US28								
Door width											
3'	Standard default					Door thickness					
4'						1 3/4" Standard					
						2 1/4" Optional					
Handing											
RHR	Right hand reverse										
LHR	Left hand reverse										
Less bottom rod											
LBR	Less bottom rod										
Accessories											
CYL	Cylinder					SNB	Sex bolts				
SK	Shim kit					AMS	All machine screws (for vertical and concealed only)				
Other miscellaneous door information											
HMD	Hollow metal door					—	Door thickness				
HMF	Hollow metal frame					—	Door undercut				
WD	Wood door					—	Door label				
WDF	Wood frame					—	Stile width				
ALD	Aluminum door					—	Frame stop height				
ALF	Aluminum frame					SGL	Single door				
SCDC	Steel channel door construction					PR	Pair of doors swinging same Direction				
—	Specify other door or frame material information										
—	Door height										

*Not available for F-24-R

How to order

Trim

		510	L	R	US26D	LHR	SUTRO	FSE	CYL
24 Series	25 Series								
711	510								
712	511								
715	512								
717	513								
718	717								
	718								
Trim function (see trim pages for all functions)									
EO	Exit only	K	Knob						
DT	Dummy trim	L	Lever (Dane standard)						
NL	Night latch	KIL	Key in lever						
C	Cylinder trim less pull	TL	Thumb lever						
TP	Thumbpiece								
Device type									
R	Rim								
V	Surface vertical rod								
C	Concealed vertical rod (includes WDC)								
M	Mortise								
Finish									
US3	US4	US10	US10B	US11	US15	US19			
US26	US26D	US32	US32D	SP28	SP313				
Handing									
RHR	Right hand reverse								
LHR	Left hand reverse								
Lever style									
	Dane (DAN)								
	Sutro (SUT)								
	Quantum (QUA)								
	Avalon (AVA)								
	Boardwalk (BRK)								
	Broadway (BRW)								
	Danish (DSH)								
	Latitude (LAT)								
	Longitude (LON)								
Other miscellaneous door information									
FSA	Electric Lock or Unlock-Fail Safe (FSA device required)								
FSE	Electric Lock or Unlock-Fail Secure (FSE device required)								
CON	Allegion Connect								
Accessories									
CYL	Cylinder								
KD	Cylinder keyed different								
Door thickness									
Specify door thickness other than 1 3/4"									

About Allegion

Allegion (NYSE: ALLE) is a global pioneer in safety and security, with leading brands like CISA®, Interflex®, LCN®, Schlage®, SimonsVoss® and Von Duprin®. Focusing on security around the door and adjacent areas, Allegion produces a range of solutions for homes, businesses, schools and other institutions. Allegion is a \$2 billion company, with products sold in almost 130 countries.

For more, visit www.allegion.com

aptiQ ■ LCN ■ **SCHLAGE** ■ STEELCRAFT ■ VON DUPRIN