


2P Trim Pull Trim

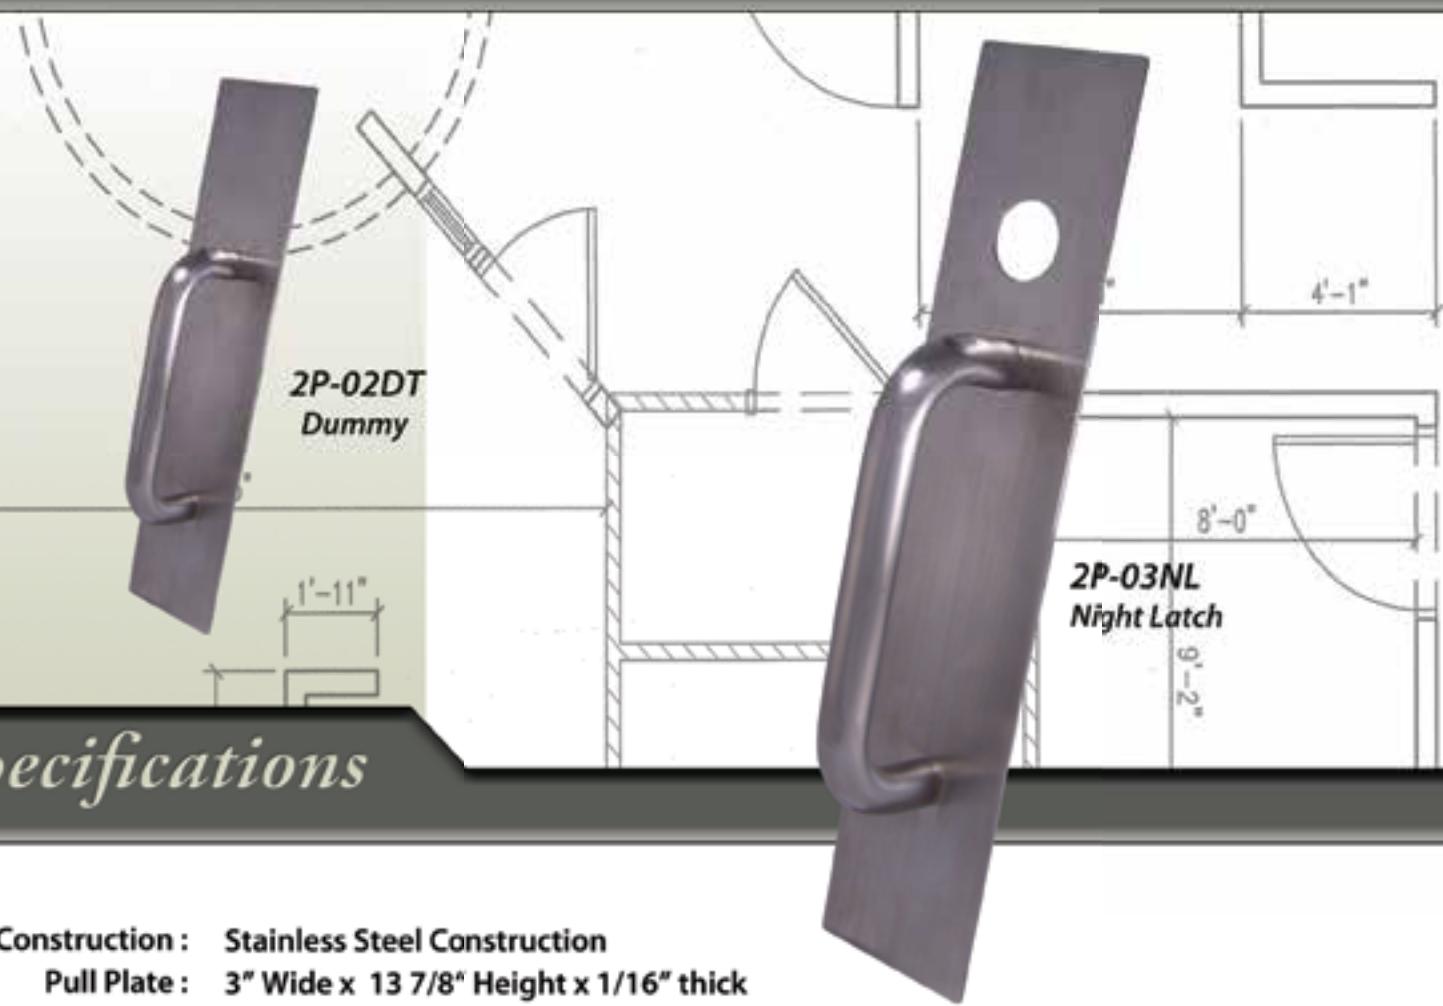

Specifications

Construction : Stainless Steel Construction

Pull Plate : 3" Wide x 13 7/8" Height x 1/16" thick

Pull : 3/4" diameter hollow x 6 1/4" ctc x 2 7/16" projection

Application : Pull trim option for 1000R & 2000R. Will cover 161 door prep

(Not recommended for SVR devices as rods can be hard to lift with rim cylinder tailpiece)

Mounting : Thru bolted design thru bolts to head of exit device and to door with finish washer. Will cover 161 door prep

Handing : Non-Handed

Door Thickness : 1 3/4"

Functions : 02DT Dummy, 03-NL Night latch (key retracts latch)

Accessories : 03-NL includes cylinder sleeve for installation into 161 door prep

Fasteners : Includes thru bolt posts, 1/4"-20 machine screws & finish washer for installation

Cylinders : Rim Cylinder required for 03NL (not included)

Rim cylinder housing for 6 or 7 pin Small format IC core (less core) also available

Optional Keyways : 11 Popular competitor keyways available with replacement cylinders

Finishes : US3, US4, US10B, US26, US32D

Warranty : Limited Lifetime Warranty