



4200 Series

Commercial Exit Device

4200 Series Commercial Exit Device

Table of Contents

Finishes	3
Exit Devices	4-6
4200R Series RIM	4
4200V Series Surface Vertical Rod	5
How to Order	6
Door Width Chart	6
Trim	7-13
Lever Designs, ANSI Functions, Finishes, Handing	7
Trim Options	8
Escutcheon	9-10
Sectional	11-12
Plate, Pull, Grip Wide Plate	13-14
Strikes	15
Accessories	15
Architectural Specifications	16

Finishes

Architectural



605 (US3)
Bright Brass, No
Coating



626 (US26D)
Satin Chromium
Plated, No Coating




630 (US32D)
Satin Stainless Steel,
No Coating

Painted



689 (US28)
Aluminum




695 (N/A)
Dark Duranodic
Bronze



696 (US4)
Satin Brass (Gold)

Finishes shown are representative only. PDQ cannot guarantee that product shipped will match finishes shown.
Not all products are available in all finishes listed.

4200 Series Rim Exit Device

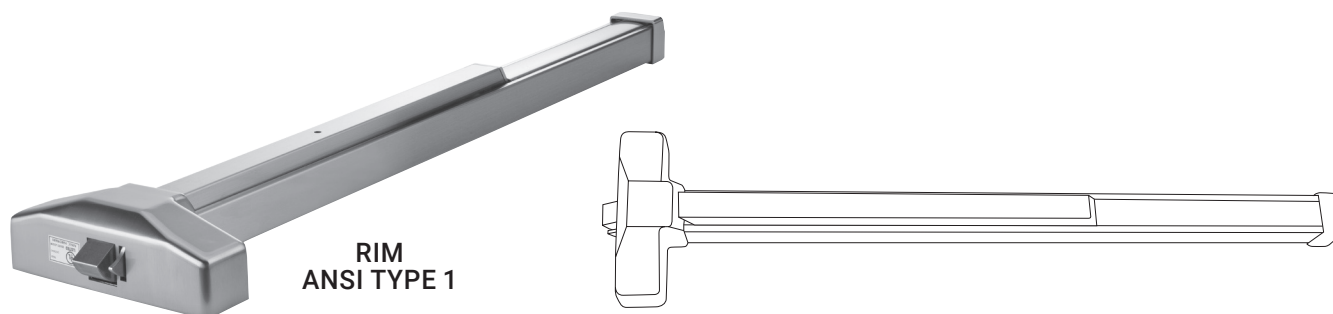

**RIM
ANSI TYPE 1**



ADA COMPLIANT


Specifications

CHASSIS:	• Corrosion resistant plated steel
RAIL:	• Heavy gauge steel or stainless steel
LATCH:	• RIM (R) – 3/4" throw
BACKSET:	• 2-3/4" Backset Compatible with 161 prep
HAND:	• Device is non-handed
DOGGING:	• Hex key dogging standard • Dogging not available on fire listed devices
MINIMUM STILE WIDTH:	• 4-1/4" for device (exit only) • Minimum stile requirements with trim varies by trim type
DOOR THICKNESS:	• 1-3/4" standard
DOOR WIDTH:	• Standard for 3 ft doors, option available for doors up to 4'
FINISHES:	• 605 – Polished Brass, 626 – Satin Chrome, 630 – Satin Stainless Steel, 689 – Aluminum, 695 (N/A)- Duro Bronze, 696 – Gold • Optional Anti Microbial Coating available on 626 and 630 finishes only
FASTENERS:	• Includes machine screws and wood screws • Sex nuts supplied with all Fire Listed devices
WARRANTY:	• Five (5) year limited warranty
CERTIFICATIONS, LISTINGS, COMPLIANCES:	• UL 305 listed for "Panic", UL listed for "Fire Exit Hardware" labeled for up to 1-1/2 hours, 3'0" x 7'0" Max Size • Complies with ADA (Americans with Disabilities Act) and ICC/ANSI 117.1 for Accessible and Usable Buildings • TAA compliant. Country of origin: Taiwan

Cross Reference

DESCRIPTION	PDQ	CAL ROYAL	CORBIN/ RUSSWIN	DORMA	FALCON	HAGER	PRECISION	SARGENT	S PARKER	TELL	VON DUPRIN	YALE
RIM	4200R	2200	ED8200	8300	19 R	4700 Rim	5100	2828	UL520	8300	22	2100

4200 Series Surface Vertical Rod Exit Device

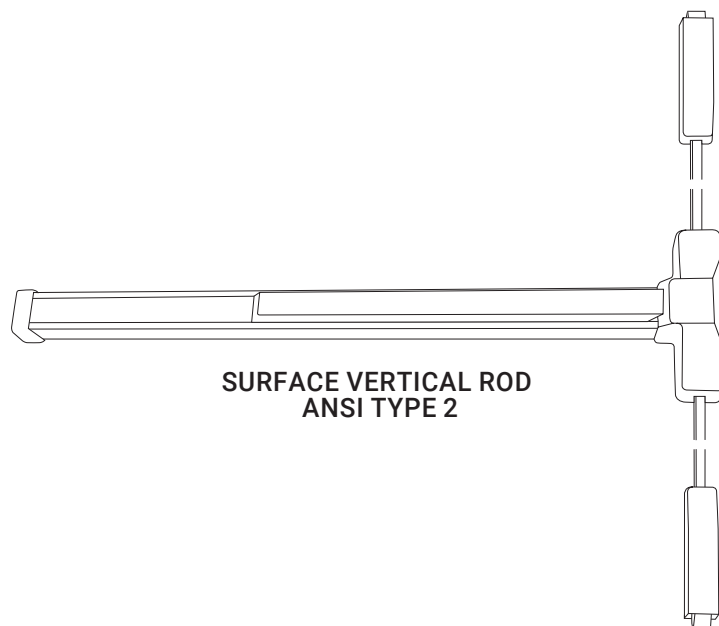

ADA COMPLIANT

Specifications

CHASSIS:	• Corrosion resistant plated steel
RAIL:	• Heavy gauge steel or stainless steel
LATCH:	• SURFACE VERTICAL ROD (V) – Top Latch-Pullman with dead latching 5/8" throw • Bottom Latch- Pullman with 5/8" throw, held retracted during door swing
BACKSET:	• 2-3/4" Backset Compatible with 161 prep
HAND:	• Device is non-handed
DOGGING:	• Hex key dogging standard • Dogging not available on fire listed devices
MINIMUM STILE WIDTH:	• 4-1/4" for device (exit only) • Minimum stile requirements with trim varies by trim type
DOOR THICKNESS:	• 1-3/4" standard
DOOR WIDTH:	• Standard for 3 ft doors, option available for doors up to 4'
FINISHES:	• 605 – Polished Brass, 626 – Satin Chrome, 630 – Satin Stainless Steel, 689 – Aluminum, 695 (N/A)- Duro Bronze, 696 – Gold • Optional Anti Microbial Coating available on 626 and 630 finishes only
FASTENERS:	• Includes machine screws and wood screws • Sex nuts supplied with all Fire Listed devices
VERTICAL RODS:	• Stock for 7' doors standard. Extension rods available for doors up to 10'.
WARRANTY:	• Five (5) year limited warranty
CERTIFICATIONS, LISTINGS, COMPLIANCES:	• UL 305 listed for "Panic" , UL listed for "Fire Exit Hardware" labeled for up to 1-1/2 hours, 3'0" x 7'0" Max Size • Complies with ADA (Americans with Disabilities Act) and ICC/ANSI 117.1 for Accessible and Usable Buildings • TAA compliant. Country of origin: Taiwan

Cross Reference

DESCRIPTION	PDQ	CAL ROYAL	CORBIN/ RUSSWIN	DORMA	FALCON	HAGER	PRECISION	SARGENT	S PARKER	TELL	VON DUPRIN	YALE
SURFACE VERTICAL ROD	4200V	2260	ED8400	8400	19 V	4700 SVR	5200	2727	520V	8400	2227	2110

How To Order

QUANTITY	SERIES	DOGGING	APPLICATION	LABELING	SIZE	FINISH
10	42	00	R	F	A	630
		00 – Hex Key Dogging (Standard) Dogging Not Furnished With Fire Listed Devices	R – Rim V – Surface Vertical Rod	F – Fire Listed, Max. 3' Door Width No Designation – Panic	BLANK – 3' doors (Default) A – Doors up to 4' Consult Door Width Chart to determine correct device for your application	605 – Polished Brass 626 – Satin Chrome 630 – Satin Stainless Steel 689 – Aluminum 695 – Duro Bronze 696 – Gold

4200 Series Door Width Chart

PART	DESCRIPTION	FOR DOOR	MIN DOOR	MAX CUT	PUSH PAD
4200R	4200 Rim Regular dogging	36"	27"	9"	18"
4200RF	4200 Rim Fire Listed	36"	27"	9"	18"
4200V	4200 SVR Regular dogging	36"	27"	9"	18"
4200VF	4200 SVR Fire Listed	36"	27"	9"	18"
4200RA	4200 Rim Regular dogging	48"	39"	9"	30"
4200VA	4200 SVR Regular dogging	48"	39"	9"	30"

Note: A size units CANNOT be cut to fit a 3 Ft. door. Please see chart above to determine door width and cut dimensions

Trim

Lever Designs



MIAMI – MIA
4SH TRIM ONLY



BOSTON – BSN
4SH TRIM ONLY



PHILADELPHIA – PHL

Trim Types



EW - ESCUTCHEON
WIDE



EN - ESCUTCHEON
NARROW



GW - GRIP PULL
WIDE



SH - SECTIONAL
LEVER



P03 - PULL



P02 - PULL



P01 - PLATE



K - SECTIONAL KNOB

ANSI Trim Functions

ANSI FUNCTION	DESCRIPTION
01	Exit only, no trim or blank escutcheon.
02	Entrance by trim when actuating bar is locked down (dummy trim).
03	Entrance by trim when latch is released by key. Key removable only when locked (night latch).
05	Entrance by thumb piece. Key locks or unlocks thumb piece (classroom thumb piece).
08	Entrance by knob or lever. Key locks or unlocks knob or lever (classroom knob/lever).
09	Entrance by knob or lever only when released by key. Key removable when locked.
14	Entrance by trim when latch bolt is released by knob or lever. Always active, no cylinder (passage knob/lever).
15	Entrance by trim when latchbolt is released by thumb piece. Always active, no cylinder (passage thumb piece).

***All functions not available in every trim style**


Finishes

CODE	TYPE	DESCRIPTION
605 (US3)	Architectural	Bright Brass, Clear Coated
613 (US10B)	Architectural	Oil Rubbed Bronze, No Coating
626 (US26D)	Architectural	Satin Chromium Plated, No Coating
630 (US32D)	Architectural	Satin Stainless Steel, No Coating
689 (US28)	Color	Aluminum
695 (None)	Color	Dark Duranodic Bronze

***All finishes not available in every trim style**

Handing

Out Swing Door



LEFT HAND
REVERSE (LHR)

RIGHT HAND
REVERSE (RHR)



OUTSIDE

Trim Options

	STYLE	FUNCTION	DESCRIPTION	TRIM TYPE	605	613	626	630	689/695
4EW	WIDE ESCUTCHEON 	02	Dummy Trim (Rigid Lever)	4 EW 02 PHL			X		
		08	Classroom w/ Lever	4 EW 08 PHL					
		09	Storeroom w/ Lever	4 EW 09 PHL			X		
		14	Passage w/ Lever	4 EW 14 PHL					
4EN	NARROW ESCUTCHEON 	02	Dummy Trim (Rigid Lever)	4 EN 02 PHL	X		X		X
		08	Classroom w/ Lever	4 EN 08 PHL					
		09	Storeroom w/ Lever	4 EN 09PHL	X		X		X
		14	Passage w/ Lever	4 EN 14 PHL	X		X		X
4S	SECTIONAL LEVER HEAVY DUTY  Sectional lever trim not compatible when using SNB to through bolt device chassis	02	Dummy Trim (Rigid Lever)	4 S 02 BSN, MIA, PHL		X	X		
		08	Classroom w/ Lever	4 S 08 BSN, MIA, PHL					
		09	Storeroom w/ Lever	4 S 09 BSN, MIA, PHL		X	X		
		14	Passage w/ Lever	4 S 14 BSN, MIA, PHL		X	X		
4K	SECTIONAL KNOB 	08	Classroom	4 K 08			X		X
		14	Passage	4 K 14			X		X
4P	PLATE PULL  PLATE TRIM PULL TRIM	01	Exit Only	4 P 01				X	
		02	Dummy Pull Trim	4 P 02					X
		03	Night Latch	4 P 03					X
4GW	GRIP PULL 	02	Dummy Trim (Grip Pull only)	4 GW 02	X		X	X	X
		03	Night Latch	4 GW 03	X		X	X	X
		05	Classroom w/ Thumb Piece	4 GW 05	X		X	X	X
		15	Passage w/ Thumb Piece	4 GW 15	X		X	X	X

Note: Specify handing. For functions and finishes not shown, contact PDQ Customer Service.

4 EW Series Heavy Duty Exit Device Trim



Ordering Guide

TYPE		LEVER SHAPES		SPECIAL FINISH COATING		KEYWAY		KEYING	
EW — Escutcheon Wide Stile		PHL — Philadelphia		AM — Anti-microbial		SCC — Default Others - See Keyway Table		KD — Keyed Different (Default) Others - See Keying Table	
4	EW	08	PHL	626	—	D	SCC	KD	
4		02 — Dummy (Rigid Lever) 08 — Classroom 09 — Storeroom 14 — Passage		613 — Oil Rubbed Bronze ⁵ 626 — Satin Chrome		D — Default L — Less Cylinder SF6 — SFIC prepped w/ 6 pin core SF7 — SFIC prepped w/ 7 pin core LF6 — Schlage LFIC prepped w/ Schlage core SF6L — SFIC 6 Pin Housing less core SF7L — SFIC 7 Pin Housing less core LFL — Schlage LFIC prepped but less core			
SERIES		ANSI FUNCTION		FINISH		CYLINDER OR HOUSING			

Ordering Example: 4 EW 08 PHL 626 D SCC KD

Notes:


- 1 - All levers field handed.
- 2 - Door thickness - 1-3/4".
- 3 - Other finishes available. Contact PDQ Customer Service.

Cylinder Reference Guide

ANSI FUNCTION	DESCRIPTION	6CYLINDER TYPE
08	Classroom	Mortise
09	Storeroom	Mortise



MORTISE CYLINDER



LENGTH INCLUDES CAM

TYPE	LENGTH	PDQ CAM NUMBER
Cylinder, Conventional	1-1/4"	I127-4204
SFIC Housing, 6 Pin	1-1/4"	I54031
SFIC Housing, 7 Pin	1-3/8"	I54031
LFIC Housing	1-1/2"	I54231

Keways


CONVENTIONAL CYLINDER		SMALL FORMAT INTERCHANGEABLE CORE		LARGE FORMAT INTERCHANGEABLE CORE	
KEYWAY	PDQ KEYWAY DESIGNATOR	KEYWAY (BEST COMPATIBLE)	PDQ KEYWAY DESIGNATOR	KEYWAY (SCHLAGE COMPATIBLE)	PDQ KEYWAY DESIGNATOR
Schlage C (Default)	SCC	BEST A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R	A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R	Schlage C (Default)	SCC (Default)
PDQ Restricted	TA			PDQ Restricted	TA
Arrow AR1	ARA	PDQ Exclusive	PDQ1	Keying	
Corbin 59A1	C059A1				
Corbin 60	C06	PDQ Exclusive and Restricted	PDQ3		
Corbin L4	CL4				
Russwin D1	RUD	PDQ Exclusive and Restricted	PDQ3		
Russwin 981	RUD981				
Schlage E	SCE	PDQ Exclusive and Restricted	PDQ3		
Schlage C	SCC				
Schlage C-K	SCC-K	PDQ Exclusive and Restricted	PDQ3		
Sargent LA	SAL				
Sargent RA-RC	RA-RC	PDQ Exclusive and Restricted	PDQ3		
Yale E1R	YA8				
Yale GA	GA	PDQ Exclusive and Restricted	PDQ3		
Falcon E-R	FAL				
Kwikset	KW	PDQ Exclusive and Restricted	PDQ3		

Keying

DESCRIPTION	PDQ KEYING DESIGNATOR
Keyed Different (Default)	KD
Keyed Alike	KA
"0" Zero Bitted	KO
Master Keyed	MK
Construction Master Keyed	CMK
Grand Master Keyed	GMK

4 EN Series Narrow Escutcheon Trim

Ordering Guide



TYPE	LEVER SHAPES	FINISH	CYLINDER OR HOUSING	KEYING
EN — Escutcheon, Narrow Stile	PHL — Philadelphia	605 — Bright Brass 626 — Satin Chrome 689 — Aluminum 695 — Dark Durododic Bronze	D — Default L — Less Cylinder SF6 — SFIC prepped w/ 6 pin core SF7 — SFIC prepped w/ 7 pin core LF6 — Schlage LFIC prepped w/ Schlage core SF6L — SFIC 6 Pin Housing less core SF7L — SFIC 7 Pin Housing less core LFL — Schlage LFIC prepped but less core	KD — Keyed Different (Default) Others - See Keying Table
4 EN	08 PHL	689 AM	D SCC	KD
4	02 — Dummy (Rigid Lever) 03 — Night Latch 08 — Classroom 14 — Passage	AM — Anti-microbial	SCC — Default Others - See Keyway Table	
SERIES	ANSI FUNCTION	SPECIAL FINISH COATING	KEYWAY	


Ordering Example: 4 EN 08 PHL 630 D SCC KD

Notes:

1 - All levers field handed.

2 - Door thickness - 1-3/4".

3 - Other finishes available. Contact PDQ Customer Service.

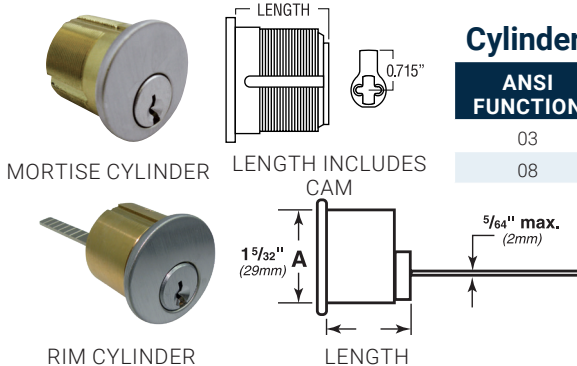

Cylinder Reference Guide

ANSI FUNCTION	DESCRIPTION	CYLINDER TYPE
03	Night Latch	RIM
08	Classroom	Mortise

TYPE	LENGTH	PDQ CAM NUMBER
Conventional- RIM	—	—
Conventional - Mortise	1-1/4"	I127-4204
SFIC Housing, 6 Pin	1-1/4"	I54031
SFIC Housing, 7 Pin	1-3/8"	I54031
LFIC Housing	1-1/2"	I54231


Keyways

CONVENTIONAL CYLINDER		SMALL FORMAT INTERCHANGEABLE CORE		LARGE FORMAT INTERCHANGEABLE CORE	
KEYWAY	PDQ KEYWAY DESIGNATOR	KEYWAY (BEST COMPATIBLE)	PDQ KEYWAY DESIGNATOR	KEYWAY (SCHLAGE COMPATIBLE)	PDQ KEYWAY DESIGNATOR
Schlage C (Default)	SCC			Schlage C (Default)	SCC (Default)
PDQ Restricted	TA			PDQ Restricted	TA
Arrow AR1	ARA	BEST A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R	A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R		
Corbin 59A1	CO59A1				
Corbin 60	CO6				
Corbin L4	CL4				
Russwin D1	RUD				
Russwin 981	RUD981	PDQ Exclusive	PDQ1		
Schlage E	SCE	PDQ Exclusive and Restricted	PDQ2		
Schlage C	SCC		PDQ3		
Schlage C-K	SCC-K				
Sargent LA	SAL				
Sargent RA-RC	RA-RC				
Yale E1R	YA8				
Yale GA	GA				
Falcon E-R	FAL				
Kwikset	KW				

Keying

DESCRIPTION	PDQ KEYING DESIGNATOR
Keyed Different (Default)	KD
Keyed Alike	KA
"0" Zero Bitted	KO
Master Keyed	MK
Construction Master Keyed	CMK
Grand Master Keyed	GMK

4SH Series Sectional Trim

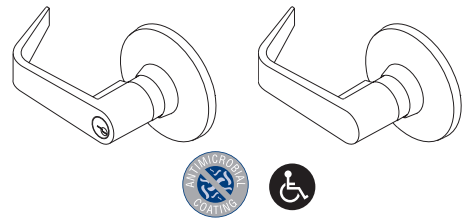

Ordering Guide

TYPE	LEVER SHAPE	FINISH	CYLINDER OR HOUSING	KEYING				
SH — Sectional	BSN — Boston MIA — Miami PHL — Philadelphia	613 — Oil Rubbed Bronze 626 — Satin Chrome	D — Default L — Less Cylinder SF6 — SFIC prepped w/ 6 pin core SF7 — SFIC prepped w/ 7 pin core LF6 — Schlage LFIC prepped w/ Schlage core SF6L — SFIC 6 Pin Housing less core SF7L — SFIC 7 Pin Housing less core LFL — Schlage LFIC prepped but less core	KD — Keyed Different (Default) Others - See Keying Table				
4	SH	08	PHL	626	134	D	SCC	KD
4	02 — Dummy (Rigid Lever) 08 — Classroom 09 — Storeroom 14 — Passage	AM — Anti-microbial	SCC — Default Others - See Keyway Table					
SERIES	FUNCTION	SPECIAL FINISH COATING	KEYWAY	KEYING				

Ordering Example: 4SH 08 PHL 626 D SCC KD

Notes:

1 - All levers field handed. 2 - Door thickness - 1-3/4". 3 - Other finishes available. Contact PDQ Customer Service.



KEY IN KNOB/
LEVER CYLINDER

Cylinder Reference Guide

ANSI FUNCTION	DESCRIPTION	CYLINDER TYPE
08	Classroom	Key in Knob/Lever
09	Storeroom	Key in Knob/Lever


Keyways

CONVENTIONAL CYLINDER		SMALL FORMAT INTERCHANGEABLE CORE		LARGE FORMAT INTERCHANGEABLE CORE	
KEYWAY	PDQ KEYWAY DESIGNATOR	KEYWAY (BEST COMPATIBLE)	PDQ KEYWAY DESIGNATOR	KEYWAY (SCHLAGE COMPATIBLE)	PDQ KEYWAY DESIGNATOR
Schlage C (Default)	SCC			Schlage C (Default)	SCC (Default)
PDQ Restricted	TA			PDQ Restricted	TA
Arrow AR1	ARA	BEST A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R	A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R		
Corbin 59A1	CO59A1				
Corbin 60	CO6				
Corbin L4	CL4				
Russwin D1	RUD				
Russwin 981	RUD981				
Schlage E	SCE	PDQ Exclusive	PDQ1		
Schlage C	SCC	PDQ Exclusive and Restricted	PDQ2		
Schlage C-K	SCC-K		PDQ3		
Sargent LA	SAL				
Sargent RA-RC	RA-RC				
Yale E1R	YA8				
Yale GA	GA				
Falcon E-R	FAL				
Kwikset	KW				

Keying

DESCRIPTION	PDQ KEYING DESIGNATOR
Keyed Different (Default)	KD
Keyed Alike	KA
"O" Zero Bitted	KO
Master Keyed	MK
Construction Master Keyed	CMK
Grand Master Keyed	GMK

4K Series Ball Knob Sectional Trim



Ordering Guide

TYPE		FINISH		SPECIAL FINISH COATING		KEYWAY	
K — Ball Knob		630 — Satin Stainless Steel		AM — Anti-microbial		SCC — Default Others - See Keyway Table	
4	K	08	630	—	D	SCC	KD
4		08 — Classroom 14 — Passage		D — Default L — Less Cylinder SF6 — SFIC prepped w/ 6 pin core SF7 — SFIC prepped w/ 7 pin core SF6L — SFIC 6 Pin Housing less core SF7L — SFIC 7 Pin Housing less core		KD — Keyed Different (Default) Others - See Keying Table	
SERIES		FUNCTION		CYLINDER OR HOUSING		KEYING	

Ordering Example: 4 K 08 630 D SCC KD

Notes:

1 - Door thickness - 1-3/4".

2 - Other finishes available. Contact PDQ Customer Service.



KEY IN KNOB/
LEVER CYLINDER

Cylinder Reference Guide

ANSI FUNCTION	DESCRIPTION	CYLINDER TYPE
08	Classroom	Key in Knob/Lever
09	Storeroom	Key in Knob/Lever

Keyways

CONVENTIONAL CYLINDER		SMALL FORMAT INTERCHANGEABLE CORE	
KEYWAY	PDQ KEYWAY DESIGNATOR	KEYWAY (BEST COMPATIBLE)	PDQ KEYWAY DESIGNATOR
Schlage C (Default)	SCC	BEST A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R	A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R
PDQ Restricted	TA		
Arrow AR1	ARA	PDQ Exclusive	PDQ1
Corbin 59A1	CO59A1		
Corbin 60	CO6	PDQ Exclusive and Restricted	PDQ2
Corbin L4	CL4		
Russwin D1	RUD	PDQ Exclusive and Restricted	PDQ3
Russwin 981	RUD981		
Schlage E	SCE	PDQ Exclusive and Restricted	PDQ3
Schlage C	SCC		
Schlage C-K	SCC-K	PDQ Exclusive and Restricted	PDQ3
Sargent LA	SAL		
Sargent RA-RC	RA-RC	PDQ Exclusive and Restricted	PDQ3
Yale E1R	YA8		
Yale GA	GA	PDQ Exclusive and Restricted	PDQ3
Falcon E-R	FAL		
Kwikset	KW	PDQ Exclusive and Restricted	PDQ3

Keying

DESCRIPTION	PDQ KEYING DESIGNATOR
Keyed Different (Default)	KD
Keyed Alike	KA
"O" Zero Bitted	KO
Master Keyed	MK
Construction Master Keyed	CMK
Grand Master Keyed	GMK

4P Series Plate Trim



PLATE TRIM



PULL TRIM



Ordering Guide

TYPE	ANSI FUNCTION	SPECIAL FINISH COATING	KEYWAY
P – Plate	01 – Exit Only 02 – Dummy Pull 03 – Night Latch	AM – Anti-microbial	SCC – Default Others - See Keyway Table
4	P	03	689
4	689 – Aluminum 695 – Dark Duronodic Bronze	–	D
		D – Default L – Less Cylinder SF6 – SFIC prepped w/ 6 pin core SF7 – SFIC prepped w/ 7 pin core LF6 – Schlage LFIC prepped w/ Schlage core SF6L – SFIC 6 Pin Housing less core SF7L – SFIC 7 Pin Housing less core LFL – Schlage LFIC prepped but less core	SCC
			KD
			KD – Keyed Different (Default) Others - See Keying Table
SERIES	FINISH	CYLINDER OR HOUSING	KEYING

Ordering Example: 4 P 03 689 D SCC KD


Notes:

1 - Door thickness - 1-3/4".

2 - Other finishes available. Contact PDQ Customer Service.



RIM CYLINDER



Cylinder Reference Guide

ANSI FUNCTION	DESCRIPTION	CYLINDER TYPE
03	Night Latch	RIM

Keyways

CONVENTIONAL CYLINDER		SMALL FORMAT INTERCHANGEABLE CORE		LARGE FORMAT INTERCHANGEABLE CORE	
KEYWAY	PDQ KEYWAY DESIGNATOR	KEYWAY (BEST COMPATIBLE)	PDQ KEYWAY DESIGNATOR	KEYWAY (SCHLAGE COMPATIBLE)	PDQ KEYWAY DESIGNATOR
Schlage C (Default)	SCC			Schlage C (Default)	SCC (Default)
PDQ Restricted	TA			PDQ Restricted	TA
Arrow AR1	ARA	BEST A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R	A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R		
Corbin 59A1	CO59A1				
Corbin 60	CO6				
Corbin L4	CL4				
Russwin D1	RUD				
Russwin 981	RUD981	PDQ Exclusive	PDQ1		
Schlage E	SCE	PDQ Exclusive and Restricted	PDQ2		
Schlage C	SCC		PDQ3		
Schlage C-K	SCC-K				
Sargent LA	SAL				
Sargent RA-RC	RA-RC				
Yale E1R	YA8				
Yale GA	GA				
Falcon E-R	FAL				
Kwikset	KW				

Keying

DESCRIPTION	PDQ KEYING DESIGNATOR
Keyed Different (Default)	KD
Keyed Alike	KA
"O" Zero Bitted	KO
Master Keyed	MK
Construction Master Keyed	CMK
Grand Master Keyed	GMK

4GW Series Grip Wide Plate Trim




Ordering Guide

TYPE	ANSI FUNCTION	FINISH	CYLINDER OR HOUSING	KEYING
GW — Grip Pull, Wide Stile	02 — Dummy Trim	605 — Bright Brass	D — Default	KD — Keyed Different (Default) Others - See Keying Table
	03 — Night Latch	626 — Satin Chrome	L — Less Cylinder	
	05 — Classroom w/Thumb Piece	630 — Satin Stainless Steel	SF6 — SFIC prepped w/ 6 pin core	
	15 — Passage w/Thumb Piece	689 — Aluminum	SF7 — SFIC prepped w/ 7 pin core	
		695 — Dark Durodonic Bronze	LF6 — Schlage LFIC prepped w/ Schlage core	
			SF6L — SFIC 6 Pin Housing less core	
			SF7L — SFIC 7 Pin Housing less core	
			LFL — Schlage LFIC prepped but less core	
4	GW	03	RHR	630
4		RHR LHR		AM — Anti-microbial
			SCC — Default Others - See Keyway Table	
SERIES	HANDING	SPECIAL FINISH COATING	KEYWAY	

Ordering Example: 4 GW 03 RHR 630 D SCC KD

Notes:

- 1 - Door thickness - 1-3/4". 2 - Other finishes available. Contact PDQ Customer Service.
3 - Trim functions 02, 03, 04 do not align with functions 05 and 15 when used on a pair of doors.

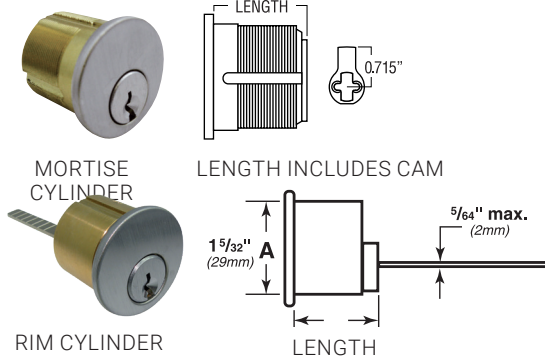

Cylinder Reference Guide

ANSI FUNCTION	DESCRIPTION	CYLINDER TYPE
03	Night Latch	RIM
05	Classroom w/Thumbpiece	Mortise
TYPE	LENGTH	PDQ CAM NUMBER
Conventional - RIM	—	—
Conventional - Mortise	1-1/4"	I127-4204
SFIC Housing, 6 Pin	1-1/4"	I54031
SFIC Housing, 7 Pin	1-3/8"	I54031
LFIC Housing	1-1/2"	I54231


Keyways

CONVENTIONAL CYLINDER		SMALL FORMAT INTERCHANGEABLE CORE		LARGE FORMAT INTERCHANGEABLE CORE	
KEYWAY	PDQ KEYWAY DESIGNATOR	KEYWAY (BEST COMPATIBLE)	PDQ KEYWAY DESIGNATOR	KEYWAY (SCHLAGE COMPATIBLE)	PDQ KEYWAY DESIGNATOR
Schlage C (Default)	SCC	BEST A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R	A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R	Schlage C (Default)	SCC (Default)
PDQ Restricted	TA			PDQ Restricted	TA
Arrow AR1	ARA				
Corbin 59A1	CO59A1				
Corbin 60	CO6	PDQ Exclusive	PDQ1		
Corbin L4	CL4				
Russwin D1	RUD				
Russwin 981	RUD981				
Schlage E	SCE	PDQ Exclusive and Restricted	PDQ2		
Schlage C	SCC				
Schlage C-K	SCC-K				
Sargent LA	SAL				
Sargent RA-RC	RA-RC	PDQ Exclusive and Restricted	PDQ3		
Yale E1R	YA8				
Yale GA	GA				
Falcon E-R	FAL				
Kwikset	KW				


Keying

DESCRIPTION	PDQ KEYING DESIGNATOR
Keyed Different (Default)	KD
Keyed Alike	KA
"O" Zero Bitted	KO
Master Keyed	MK
Construction Master Keyed	CMK
Grand Master Keyed	GMK


Strikes

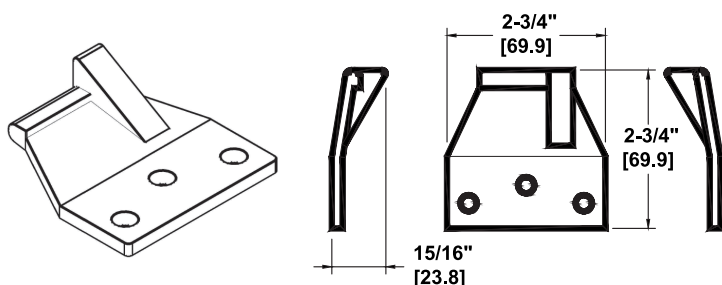


429019 DOUBLE DOOR STRIKE

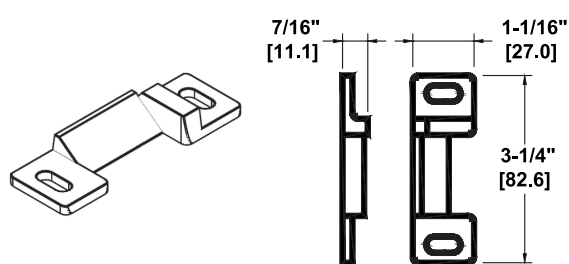

429036 RIM STD. LOW PROFILE STRIKE
(2-3/4" BACKSET) FIRE & PANIC

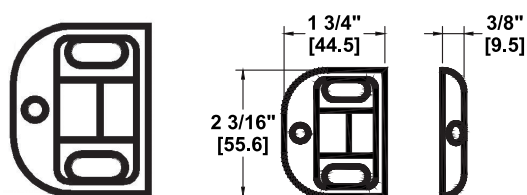

429006 SVR BOTTOM
STRIKE W/2 SHIMS PANIC
AND FIRE

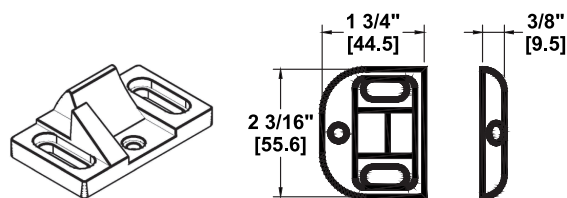

429005 SVR TOP STRIKE W/2 SHIMS PANIC AND
FIRE

Accessories


PART (SPECIFY FINISH)	DESCRIPTION	SPECIFY FINISH PAINTED 689/695/696	SPECIFY FINISH PLATED 605/626/630
429020	Top surface vertical rod for 7'0" door	•	•
429021	Top surface vertical rod, 1' extension for 8'0" door	•	•
429023	Top surface vertical rod, 3' extension for up to 10'0" door	•	•
429024	Bottom surface vertical rod	•	•
429001	Sex nut and bolt set	•	N/A
429002			•
429003	Cylindrical Lock Latchbolt Cover Plate - Covers the Latchbolt cut-out for a door prepped to Type 160 or Type 161		•
429005	Strike filler		•
429006	Strike, SVR Top Rod, Fire and Panic w/2ea 1/16" shims		•
429014	Strike, SVR Bottom Rod, Fire and Panic w/2ea 1/16" shims		•
429014	Trim back plate (2-1/2" x 8"), use w/narrow escutcheon to cover 161 prep		•
429017	Trim back plate (3-1/2" x 8"), use w/narrow escutcheon to cover 161 prep		•
429017	Double door strike		•
429019	Universal Glass Bead Kit		•
429019	Low profile RIM strike supplied standard for 161 prep with 5/8" stop and 1/8" standard gap		•
429150	Dogging Key		•
429036			•
429043			•

Suggested Architectural Specifications

All exit devices shall be PDQ 4200 Series rim or surface vertical rod devices. Surface vertical rod devices to have top and bottom pullman latch bolts. Latch bolts to be dead locking where applicable. All touch bar components to be constructed of heavy gauge wrought steel or stainless steel. Devices to be furnished with metal chassis covers and end caps. Devices to be available for panic and fire labeled doors. Devices for non-labeled doors shall have hex key dogging standard. All devices to offer a variety of trim options including escutcheon, sectional lever, sectional knob, plate and grip pull. Fasteners to be furnished for wood and metal applications. Fire listed devices furnished standard with sex nuts. Devices shall be listed by U.L./U.L.C. and comply with U.L. 10C and UBC 7-2 (1997) for positive pressure. All products to carry a 5-year limited warranty.

All devices and trim shall comply with ADA Guidelines and Buy American Act.

Architectural Finishes. No Plastic Parts.

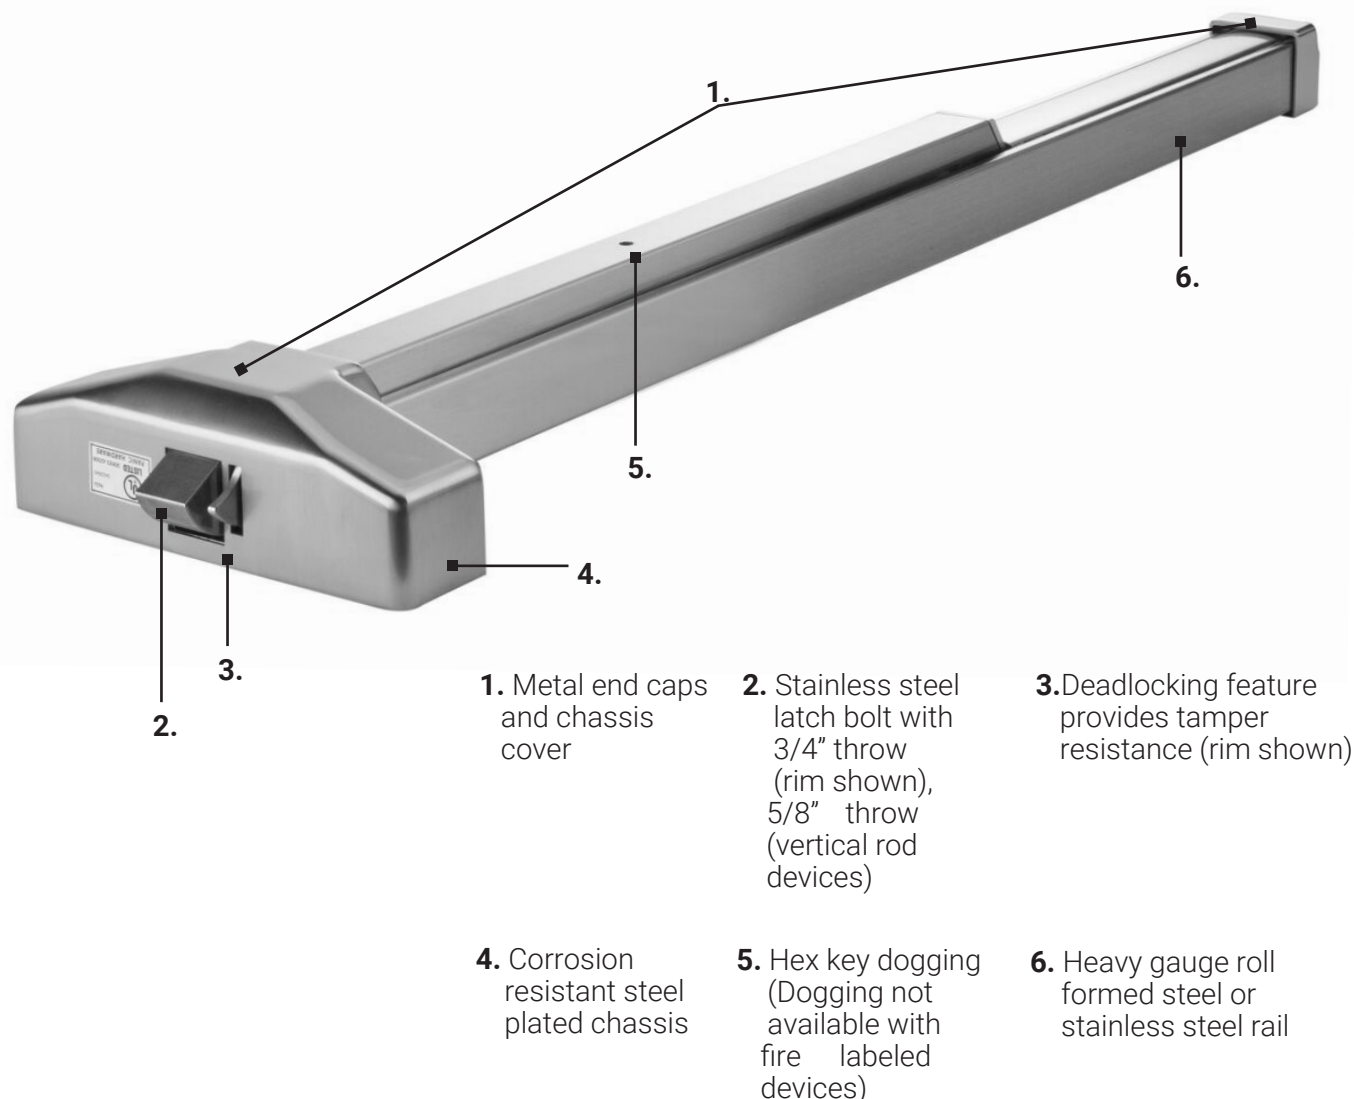

Decorative Finish Collection

Architectural

605 Bright Brass, Clear Coated
626 Satin Chromium Plated
630 Satin Stainless Steel

Painted

689 Aluminum
695 Dark Bronze
696 Gold





SECURING CONFIDENCE OPENING POSSIBILITIES

Phone: 800.441.9692

Tech Support: 833.273.7832

Email: help@pdqlocks.com

Headquarters: 2230 Embassy Drive, Lancaster, PA
17603 P.O Box 6426, Lancaster, PA 17607

Regional Distribution Centers: Lancaster, PA | Norcross,
GA | Kansas City, MO | Auburn, WA