



5070-9'

Silicone Double Shark Fin Smoke Seal

Smoke-Rated for Perimeter and/or Meeting Edge Astragal Applications



UL Tested and Classified for Fire and Smoke doors

* Seals against smoke, air and weather

* Excellent compression; door latches easily

Installation Instructions

1. The recommended surface temperature of the frame must be between 65°F and 95°F for the adhesive to bond.
2. Clean frame with clean wipe provided to remove dust, oil, grease and dirt. Wax coated or high gloss painted surfaces may require roughening with a scotch brite pad or sand paper so adhesive will bond properly.
3. Measure and pre-cut pieces to fit the head and jambs.
4. Remove protective backing 1 to 2 feet at a time.
5. Position on where illustrated for application required.
6. Adhere seal by pressing firmly (15 lbs. of pressure required) along entire length of gasket. Do not remove and relocate.
7. Make sure the seal does not impede the proper closing and latching of door.

COLOR

B - Brown



CL - Clear



POSITIVE PRESSURE TESTED GASKETING MATERIALS FOR FIRE DOORS. FOR APPLICATION TO HOLLOW-METAL-TYPE FIRE DOORS, RATED UP TO 3 HOURS AND WOOD-TYPE FIRE DOORS, RATED UP TO 1½ HOURS. CATEGORY H

Smoke & draft control gasketing (Category H) tested to UL 1784; meets requirements of NFPA 105, IBC for use on "S" label doors.

3.25

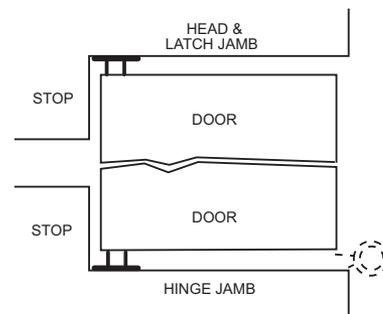

Astragal Application
Pair of Doors

STORAGE AND SHELF LIFE

The adhesive on this seal has a shelf life of one year when stored at 75°F and 50% relative humidity or less.

Made in USA

800-647-7874

ngp.com