


TECHNICAL DATA SHEET • SPECIFICATIONS

FLUSH UNIVERSAL ACCESS DOOR WITH EXPOSED FLANGE Screwdriver latch, piano hinge

AHD-110

INSTALLATION

Technical drawing AHD-110

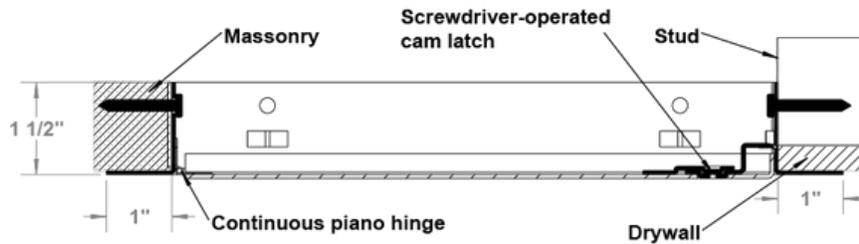

STANDARD DIMENSIONS AND APPEARANCE


Dimensions • W X H		Number of locks	Weight	
inches	mm		lbs	KG
22 x 30	558 x 762	2	17.7	8.0
22 x 36	558 x 914	2	20.8	9.4
24 x 30	609 x 914	2	19.9	9.0
24 x 36	609 x 1219	2	22.3	10.1
24 x 48	609 x 762	2	28.9	13.1
30 x 30	762 x 762	4	23.5	10.7
36 x 36	914 x 914	4	31.7	14.4

Your odd sizes: Made in 5 days

Rough wall opening is door size + 1/4" or + 6 mm

OTHER TECHNICAL INFORMATION

The HHD model is recommended for over 1296 sq. inches

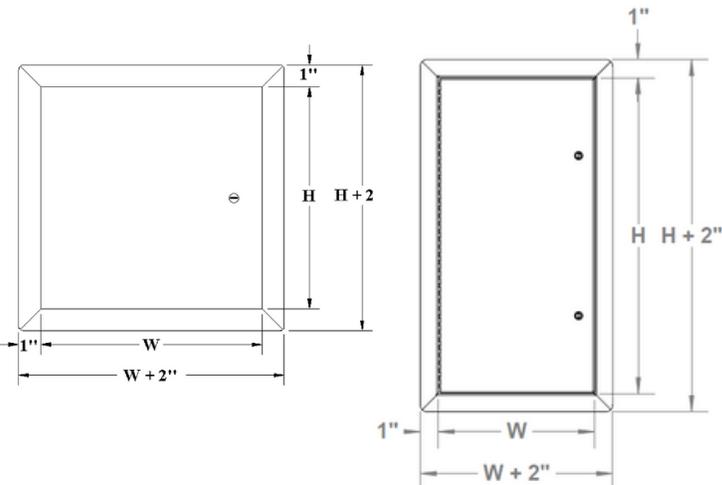

DESCRIPTION AND MATERIAL SPECIFICATION

Material	16-gauge cold-rolled steel
Hinge	Hot-rolled and stamped continuous piano hinge, located on the second dimension (height)
Lock / Latch	Screwdriver operated cam latch
Finish	High quality white powder coat primer
Packaging	Individually wrapped, 1 door per box

POPULAR OPTIONS

For complete list of options go to cendrex.com

Lock / Latch	Key-operated cylinder cam latch (-10), mortise cam latch preparation (-15, cylinder optional), hex head cam latch (-50)
Handle	4" handle-operated cam latch (-20), fixed 4" handle (-21), 4" handle-operated slam latch (-22), 4" handle and key operated cam latch (-25)
Material	Stainless steel (SS), Galvanneal steel (GS)
Other	Neoprene gasket (-60)



PROJET DATA

Project:	Date:	QTY	W	H
Architech:				
Dealer:				
Contractor:				
Location:				

Tagging instructions:

Special instructions:

Options:

Submittal approval:
(Signature or stamp)

HEAD OFFICE
6500 Henri-Bourassa E. Blvd
Montreal QC H1G 5W9

cendrex

Made in Canada

Made in Canada

Last updated: December 28, 2023

514-493-1489 | 1-800-479-1489
info@cendrex.com | cendrex.com

OPTIONS

This comprehensive list includes all available options. Please consult our catalog or contact our customer service to verify the feasibility of your chosen combination.

LOW SECURITY LOCKING MECHANISM



- 35** Screwdriver operated cam latch



- 220** Screwdriver operated cylinder Cam latch



- 80** Ring/tool key operated slam latch



- 55** Hex head slam latch and ring key operated slam latch



- 30** Slide latch



- 50** Allen hex head cam latch

HANDLES



- 25** WITH KEY - 4" handle and key operated cam latch



- 100K** Key-operated recessed handle cam latch with cap over key path



- 20** WITHOUT KEY - 4" handle operated cam latch



- 22** WITHOUT KEY - 4" handle operated slam latch



- 21** WITHOUT KEY Fixed 4" handle



- 26** WITHOUT KEY - L handle

MEDIUM SECURITY LOCKING MECHANISM



- 10** Key-operated cylinder cam latch



- 15** Mortise cam latch preparation
- 15C** Mortise cam latch preparation, keyed differently
- 15CKA** Mortise cam latch preparation, keyed alike



- 85** Mortise slam latch



- 85C** Mortise slam latch with cylinder
- 85CKA** Mortise slam latch cylinder keyed alike



- 90** Pinned hex head cam latch



- C** Cylinder cam latch, keyed differently



- CKA** Cylinder cam latch, keyed alike

MATERIALS



- GS** Galvanneal steel



- AL** Aluminum



- SS** Stainless steel



- CR** Cold rolled steel

HIGH SECURITY LOCKING MECHANISM



- 40** Mortise deadbolt lock



- 40C** Mortise Deadbolt Lock with Cylinder, keyed differently



- 40CKA** Mortise deadbolt lock with cylinder, keyed alike



- 99** Inside release thumbturn for mortise deadbolt lock



- 45** Mortise preparation for detention deadbolt lock



- 46** Detention deadbolt lock



- 47** CIDetention deadbolt Key

OTHERS



- 60** Gasket



- 160** Holding cable



- 240** Masonry anchors