

Safety Railing

ROOF HATCH FALL PROTECTION

The OSHA compliant Safety Railing is ideal for new and retrofit applications. The safety railing mounts to the existing roof hatch curb counterflash without penetrating the membrane or curb.

BENEFITS

EASY FIELD INSTALLATION No field cutting required as rails are cut to exact size. Easy assembly fittings and quick mounting on counterflash using a patented nut backing plate.

SELF CLOSING GATE (shown) Designed to automatically close, the gate is constructed with spring loaded hinges to protect against falls.

Comes with standard chain barrier with easy spring clip attachment to guard against falls. (Not OSHA compliant)



OSHA[®]

Safety Yellow Powder Coat
option shown

DETAILS

MATERIAL Rails and posts, aluminum, 1-1/4 inch ID (1.66 inch OD)
Schedule 40 pipe

FINISH Powder Coat, Safety Yellow or Mill

FITTINGS Cast aluminum alloy with set screw hold


MOUNTING BRACKETS 3/16 inch steel, zinc-plated with nut
backing plate

Hardware Hex head bolts 3/8 - 16 by 3/4 inch zinc-plated steel

EXIT Must be kept closed when roof hatch door is open

- Self-Closing Gate: Aluminum, 1-1/4 inch ID (1.66 inch OD) Schedule 40 pipe, self-closing with coil spring

COMPLIANCE OSHA 29 CFR 1910.29, 1910.28

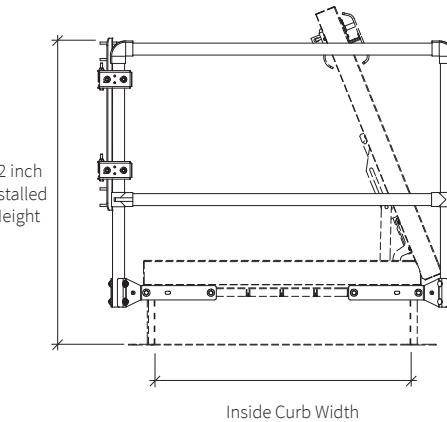

STANDARD MODELS

GATE CLOSURE			
YELLOW	MILL	SIZE (IN.)	ACCESS
BSRCAY36X30FG	BSRCA36X30FG	36 x 30	Front
BSRCAY36X36FG	BSRCA36X36FG	36 x 36	Front
BSRCAY48X48FG	BSRCA48X48FG	48 x 48	Front
BSRCAY30X54SG	BSRCA30X54SG	30 x 54	Side
BSRCAY30X72SG	BSRCA30X72SG	30 x 72	Side
BSRCAY30X96SG	BSRCA30X96SG	30 x 96	Side

Additional sizes available, call for more information.

THERMALMAX™ MODELS

GATE CLOSURE			
YELLOW	MILL	SIZE (IN.)	ACCESS
BSRBAY36X30FG	BSRBA36X30FG	36 x 30	Front
BSRBAY36X36FG	BSRBA36X36FG	36 x 36	Front
BSRBAY48X48FG	BSRBA48X48FG	48 x 48	Front
BSRBAY30X54SG	BSRBA30X54SG	30 x 54	Side
BSRBAY30X96SG	BSRBA30X96SG	30 x 96	Side