

# Mullions

7100 – for use with non-rated rim exit devices on non-rated pairs of doors


## SPECIFICATIONS:

- Mullion Size ..... 2" x 3" x 96" Steel Tube. Mullion may be field cut to fit proper size.
- Rim Cylinder ..... Use Rim Cylinder, cylinder not included. 3/8" spacer required. Not included.
- Top Bracket ..... Steel, using key allows the mullion to be removed in seconds.  
Mullion can be locked in top bracket easily without using the key.
- Bottom Bracket ..... Steel, fixed by 4 hex bolts with stainless steel anchors.
- Strike ..... Use two standard Rim Strikes (not included)
- Finish ..... Gray baked powder coating only


7100F – for use with fire-rated rim exit devices on fire-rated pairs of doors

## SPECIFICATIONS:

- Mullion Size ..... 2" x 3" x 96" Steel tube. Mullion may be field cut to fit proper size.
- Rim Cylinder ..... Use rim cylinder, cylinder not included. 3/8" spacer required. Not included.
- Top Bracket ..... Stainless steel, using key allows the mullion to be removed in seconds.  
Mullion can be locked in top bracket easily without using the key.
- Bottom Bracket ..... Stainless steel, fixed by 4 hex bolts with stainless steel anchors.
- Strike ..... Use two (2) sets of Mullion Strikes (688) & Strike Hooks (689) - Not Included. (Part No. MULL7100FSTRKPKC)
- Finish ..... Gray baked powder coating only

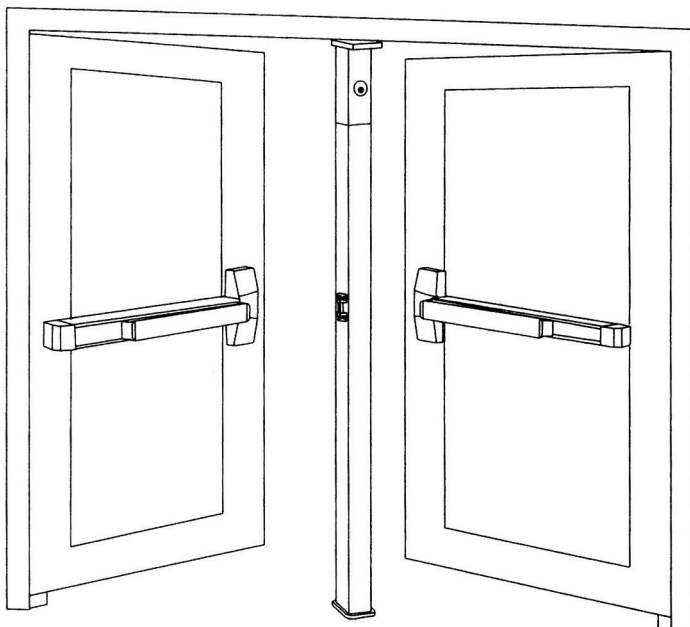

The removable Mullion is used for with two Rim Devices on double doors.

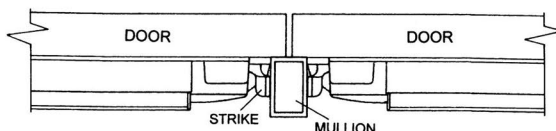

FOR USE WITH FIRE-RATED


FOR USE WITH NON-RATED




Top Bracket



Top Bracket



Bottom Bracket



Bottom Bracket



Mullion Strike



Rim Strike



Strike Hook

Item	Description	Unfinished
MULL7100	Mullion Non-Rated	•
MULL7100F	Mullion Fire-Rated	•
MULL7100FSTRKPKC	Fire-Rated Mullion Pack	•