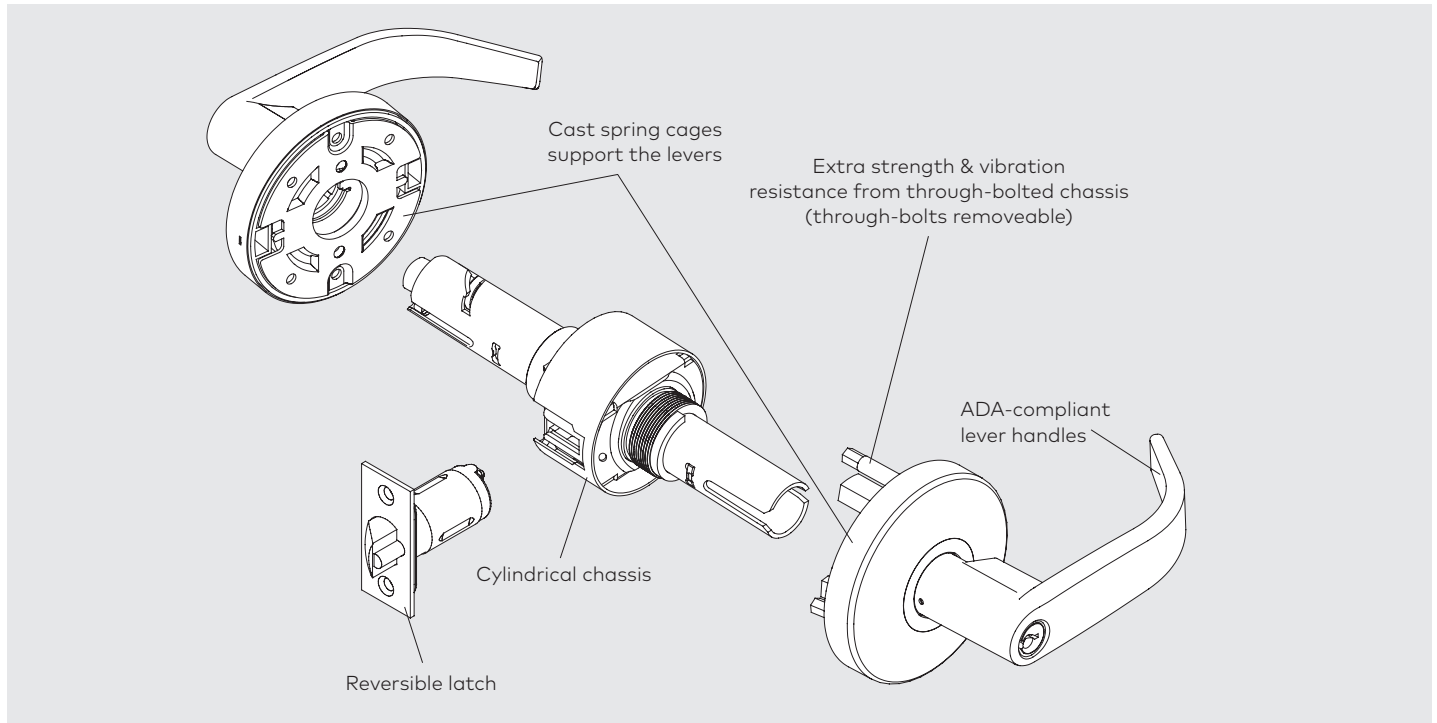


C500 Series

Grade 2 cylindrical locksets

We make access in life smart and secure





Providing security, aesthetics, and dependability at an affordable price.

Contents

C500 Series

02 Features

03 Technical details/Specifications

How to order

04 Locks

04 Keyways

Functions

05 Available functions

Trim options

06 C500 LR Lever

06 C500 LC Lever

06 C500 LG Lever

Lock options

07 Strikes

07 1/2" Throw latch bolt

C5000 Series

These key-in-lever locksets are built with a high performance cylindrical chassis for all applications where ANSI/BHMA A156.2 Series 4000 Grade 2 products are required. To meet the aesthetic needs of your project, these versatile locks are available with three lever designs and six standard finishes. Complementing the aesthetic appeal of the C500 are the nine different functions to help solve your challenging applications.

Features

- All C500 Series locks feature advanced design concepts, providing exceptional reliability, and are manufactured with the finest materials, delivering enhanced durability.
- C500 Series locks are easy to install in both wood or hollow metal doors with ANSI/BHMA A156.115 preparations for cylindrical locks.
- All C500 Series lever handle locks include special auxiliary support springs to ensure smooth operation and long life.
- C500 Series locksets have an optional through-bolted chassis for additional strength and increased resistance to vibration (through-bolting recommended).
- All C500 Series locks are easily adjustable for doors from 1-3/8"–1-3/4" thick. Consult the factory for product suggestions for thick door applications.

Recommended applications

- Hotels
- Apartments
- Churches
- Municipal buildings
- Retail complexes
- Offices
- Warehouses

Technical details

- Non-handed for simple installation.
- Key-in-lever lock is through-bolted for additional strength and security.
- Thru bolts removable for retrofit applications.
- Lock chassis constructed of steel, stainless steel and precision castings for superior strength and corrosion resistance.
- Stainless steel latch bolt.
- Auxiliary deadlocking latch bolt for preventing manipulation when door is closed (all keyed functions).

Cylinders and keying

- Unless otherwise specified, cylinders will be provided in DORMA standard keyway with two (2) nickel silver keys.
- Optional patented key system available.
- Refer to Price List for full details and options such as master keying, retrofit cylinders and keyways, and small format and full size interchangeable cores.

Finishes

- Brass: 605 (Bright, Clear Coated) or 606 (Satin)
- Bronze: 613 (Dark Oxidized Satin)
- Nickel: 619 (Satin)
- Chrome: 625 (Bright) or 626 (Satin)

Special finish notes

ANSI/BHMA A156.18 standards describe 613 Dark Oxidized Satin Bronze finish as a category B finish. B category finishes, "do not match from one alloy or form of material to the next and from one manufacturer to the next."

The 613 finish may vary between manufacturers' products and models. In some instances, for customer convenience, the most appropriate BHMA finish symbols are used to indicate similarity of appearance, regardless of base metal or finishing process. Finishes of latches, strikes, cylinders/cores, and visible mounting screws, though similar in appearance, may differ from the finish of the trim. Finish designations in the 600 numbers are the BHMA (Builders Hardware Manufacturers Association) industry standard.

Finish availability chart

	613	619	626	605	606	625
LR	•	•	•	•	•	•
LC	•	•	•	•	•	•
LG	•	•	•	—	—	—

• yes — no

Certifications

- ANSI/BHMA A156.2 Grade 2 certified.
- UL/CUL listed 3 hour fire rated. Locks are listed for A label and lesser class doors.
- Meets A117.1 accessibility code and ADA requirements for barrier-free accessibility.



dormakaba USA quality and environmental management systems in Indianapolis, IN are certified to ISO 9001:2015 and ISO 14001:2015.



How to order C500 Series locks

Function

Storeroom — 80

Classroom — 70

Entry — 53

Office/Entry — 50

Privacy, bedroom or bath — 40

Patio — 30

Exit/Communicating passage — 25

Passage/Closet — 10

Dummy trim one side — 01

Cylinder type¹

D — Conventional Cylinder

C — SFIC

J — SFIC – Less Core

T — Temporary SFIC

Finish²

626 — Satin Chrome

625 — Bright Chrome

606 — Satin Brass

619 — Satin Nickel

613 — Dark Oxidized Satin Bronze

605 — Bright Brass

Strike options³

134 — 1-3/8"–1-3/4"

C5

53

D

LR

C

626

15250

134

5001

XXXX

Grade 2 Cylindrical Lockset

Product family

LR

LC

LG

Lever design

Rose design

Latch bolt⁴

Door thickness

See below page for keying options

1. The C500 is not available less conventional cylinder. All keyed functions are available with or without SFIC cores.

2. For split finishes, consult factory.

3. Example shows default values. Refer to Lock Options section for full details.

Note: SFIC available on LR and LC lever designs only.

How to order keyways

Standard keyways

Keying

OBIT — 0-Bitted

CMK — Construction master keyed

MKD — Master keyed

NSK — Keyed alike, sets of 3 or more

KA2 — Keyed alike, sets of 2

KD — Keyed different

SC

KD

SC — Schlage C

SE — Schlage E

D100 — DORMA SKC

AA — Arrow A

CA — Corbin 60

CB — Corbin 67

CC — Corbin 77

CD — Corbin 59A1

CE — CorbinRusswin L4

RA — Russwin 981

RB — Russwin D1

GA — Sargent LA

SF — Schlage F

YA — Yale 8

YG — Yale GA

Retrofit keyways available 0-Bitted only

Keyway

IC keyways

Keying

TMP — Temporary construction core

MKD — Combined (master keyed)

BA

MKD

BA — Best A

BB — Best B

BC — Best C

BD — Best D

BE — Best E

BF — Best F

BG — Best G

BH — Best H

BJ — Best J

BK — Best K

BL — Best L

BM — Best M

BQ — Best Q

TB — Best TB

D100 — DORMA SKC (7-pin core only)

BLK — Black construction core

BLU — Blue construction core

GRN — Green construction core










Specify color if required to match existing project

Keyway

Note: All combinations of features and options are not available for all models.

4

Functions

Function	Series	Outside	Description
Dummy trim One side	C501		- Used as pull or matching trim on pairs of doors. - Trim is through-bolted from opposite side.
Passage/closet	C510		Latch bolt operated by trim either side at all times.
Exit/communicating passage	C525		- Deadlocking latch bolt operated by inside trim. - Blank plate outside. - Minimum clearance 3/4" on single doors and 1-1/2" between double doors.
Patio	C530		- Deadlocking latch bolt operated by trim either side. - Outside trim locked by push button or locking device inside. - Outside trim unlocked by trim inside. - Outside trim unlocked by closing door. - Inside trim always unlocked. - Do not use in rooms that have no other entrance.
Privacy, bedroom or bath	C540		- Latch bolt operated by trim either side. - Outside trim locked by push button or locking device inside. - Outside trim unlocked by emergency release outside. - Outside trim unlocked by trim inside. - Outside trim unlocked by closing door. - Inside trim always unlocked.
Office/Entry	C550		- Deadlocking latch bolt operated by trim either side, except when outside trim locked by push button inside. - Key outside releases push button, unlocking outside trim. - Outside trim unlocked by trim inside. - Operating inside trim releases push button, unlocking outside trim. - Inside trim always operates latch bolt.
Entry	C553		- Deadlocking latch bolt operated by trim either side, except when outside trim locked by push button inside. - Key outside releases push button, unlocking outside trim, except when inside button pushed and turned to keep outside trim locked. - Operating inside trim releases push button, unlocking outside trim, except when inside button pushed and turned to keep outside trim locked. - Inside button must be turned to unlock outside trim. - Inside trim always operates latch bolt.
Classroom	C570		- Deadlocking latch bolt operated by trim either side, except when outside trim locked by key outside. - Outside trim locked or unlocked by key outside. - When outside trim locked, latch bolt operated by trim inside.
Storeroom	C580		- Deadlocking latch bolt retracted by key outside. - Deadlocking latch bolt operated by trim inside - Outside trim always inoperable.



Indicates rigid lever.

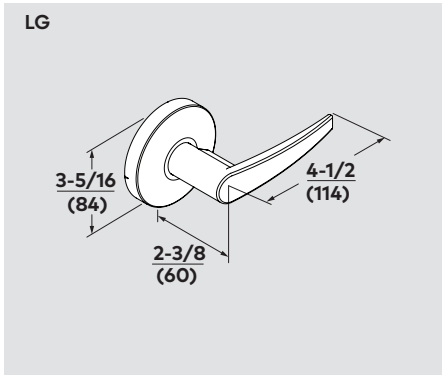
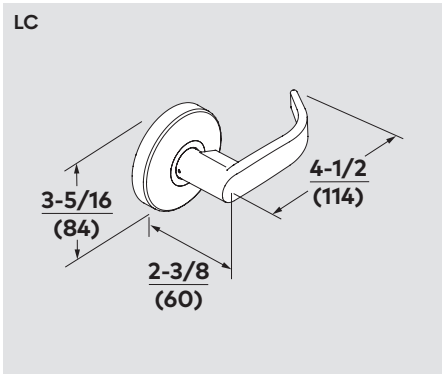
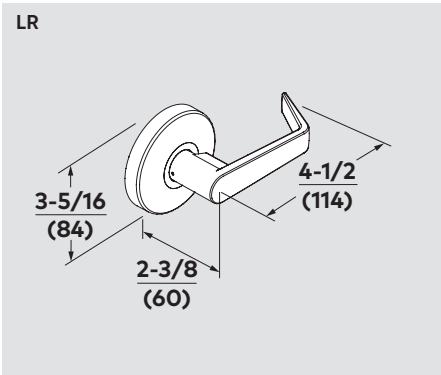


Indicates SFIC Core available.

Trim options


Lever designs

ADA compliant levers feature solid cast handles. Levers with returns return to within 1/2" (12 mm) of the door face.




Lock options

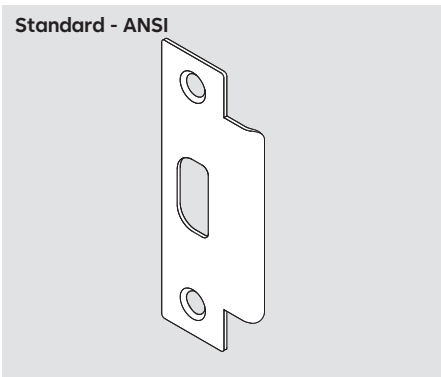
Strikes



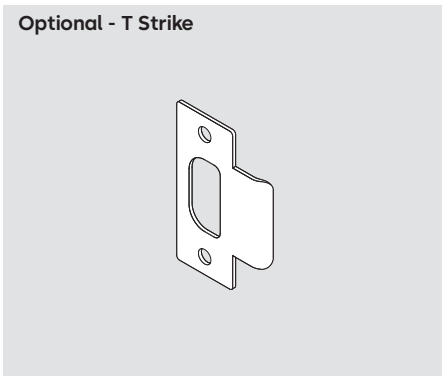5001 — ANSI 1-1/4" x 4-7/8" square corner strike. Default strike for all C500 Series locks.




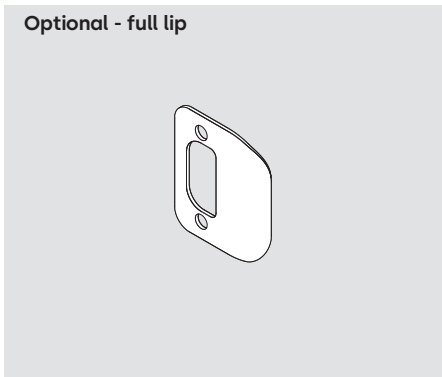5101 — 1-1/8" x 2-3/4" square corner T-strike. 1-1/8" lip length. Dust box included.



5201 — 1-5/8" x 2-1/4" square corner full curved lip strike. 1-1/8" lip length.
5202 — 1-5/8" x 2-1/4" full curved lip strike with 1/4" radiused corners. 1-1/8" lip length.

1/2" Throw latch bolt



1/2" Throw
Latch Bolt

	Part Number				
	2-3/4" Backset 1" Faceplate Square Corner	2-3/4" Backset 1" Faceplate 1/4" Radius	2-3/4" Backset 1-1/8" Faceplate Square Corner	2-3/8" Backset 1" Faceplate Square Corner	2-3/8" Backset 1" Faceplate 1/4" Radius
Functions (ANSI)					
C510 (F75)—Passage/Closet	15230	15231	15232	15130	15131
C525 (F111)—Exit/Communicating Passage	15250	15251	15252	15150	15151
C530 (F77A)—Patio	15280	15281	15282	15180	15181
C540 (F76A)—Privacy, Bedroom or Bath	15230	15231	15232	15130	15131
C550 (F109)—Office/Entry	15250	15251	15252	15150	15151
C553 (F109)—Entry	15250	15251	15252	15150	15151
C570 (F84)—Classroom	15250	15251	15252	15150	15151
C580 (F86)—Storeroom	15250	15251	15252	15150	15151
C501—Dummy Trim One Side	—	—	—	—	—

Note: Default options shown in bold.

Our Sustainability Commitment

We are committed to foster a sustainable development along our entire value chain in line with our economic, environmental and social responsibilities toward current and future generations. Sustainability at product level is an important, future-oriented approach in the field of construction. In order to give quantified disclosures of a product's environmental impact through its entire life cycle, dormakaba provides Environmental Product Declarations (EPD), based on holistic life cycle assessments. <https://www.dormakabagroup.com/en/sustainability/product-declarations>.

Our offering

Access Automation Solutions

Entrance Automation
Entrance Security



Access Control Solutions

Electronic Access & Data
Escape and Rescue Systems
Lodging Systems



Access Hardware Solutions

Door Closers
Architectural Hardware
Mechanical Key Systems



Services

Technical Support
Installation and commissioning
Maintenance and Repair



Key & Wall Solutions

Key Systems
Movable / Sliding Walls



Safe Locks

Electronic Safe Locks
Mechanical Safe Locks
Boltworks and Accessories



Glass systems

Manual door systems
Glass fittings
Horizontal Sliding Walls



DHW_1672_BR_EN CEI 0225
Subject to change without notice

dormakaba USA Inc.
6161 E 75th Street
Indianapolis, IN 46250
1-800-523-8483
dormakaba.us



dormakaba.com