



FR180

Frame Repair Kit

PRODUCT CUT SHEET

Application Certified for Steel Fire Doors and Frames Rated up to 3 Hours

- ▶ Maximum Area of Cutout in Door or Frame Concealed Plate is:
 - 5.5 Sq. In. up to 12" Cover Plate
 - 12.0 Sq. In. Between 24" and 48" Cover Plate
 - No Single Cutout Larger Than 5.5 Sq. In.
- ▶ Allowed to be Used on Steel Frames up to 14 Ga. Thickness
- ▶ Allowed to be Used on Steel Doors up to 16 Ga. Thickness
- ▶ Cover Plate Maximum Size 48"
- ▶ Allowed to be Used With Listed Surface Mounted Hardware and Listed Door Position Switches (up to 1 1/8" Diameter)
- ▶ Adhesive Tape May be Used in Addition to Mechanical Fasteners

PRODUCT CONSISTS OF:

- + Metal Plate, 16 Ga. Steel, Embossed with UL Mark
- + Hardware Pack: 6-32 x .500 FU-P-BO-ST
Drill Bit #36 x 2 1/2"


- ▶ Sizes 6" and 48" (Can be Cut Down in Field)

FINISH:

Primer Gray, Powder Coat



UL CERTIFIED FOR USE IN
THE US AND CANADA

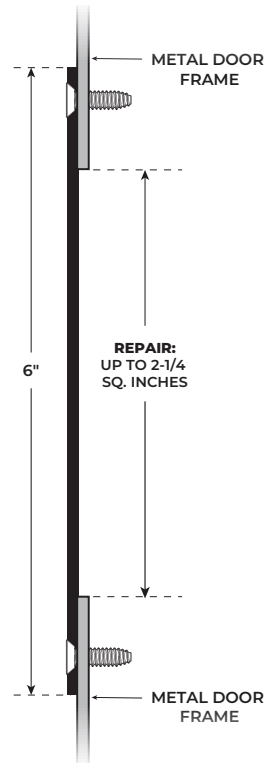

PROJECT:

SUBMITTED BY:

DATE:

NOTES:



NGP-GAP-FR180-PCS-0625-A

NATIONAL GUARD PRODUCTS, INC.

MEMPHIS

4985 East Raines Road
Memphis, TN 38118

CARSON CITY

3689 Arrowhead Drive
Carson City, NV 89706

Fax: (800) 255-7874
Email: info@ngp.com

Quotes: quotes@ngp.com
Orders: orders@ngp.com

ngp.com
1-800-NGP-RUSH