


780 Series Concealed Leaf - 780-113HD - Heavy Duty

SPECIFICATIONS

- Material:** Aluminum 6063-T6
- Clearance:** 13/16" (21 mm) hinge side plus standard lockside clearance
- Fasteners:**
- Standard: Dril-Kwik® - #12-24 x 11/16 Flat Head Screws
 - Optional: 1/2 Dril-Kwik® Screws, 1/2 Wood Screws
 - Additional options available upon request
- Length Options:** Standard and custom lengths available
- Door/Frame Reinforcement:** None required to 200 lbs., heavier weight use 16-gauge channel
- Notes:** See additional fire rating details on page 3

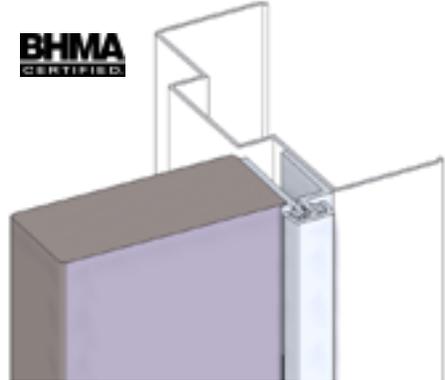

(Left hand shown)

FEATURES

- Heavy duty for high frequency doors or heavy, medium frequency doors
- "Safety Hinge" for early education centers, nursing homes, etc. (when used without frame stop)
- Door leaf alignment rib for proper door location
- 1/16" (1.5 mm) inset

Length		HD Fastener Count	
Inches	Millimeters	# For Door	# For Jamb
79	2007	15	16
83	2108	19	18
85	2159	19	18
95	2413	20	20
119	3023	23	26

