

780 Series Concealed Leaf - 780-226HD | 780-226LL - Heavy Duty or Lead Lined

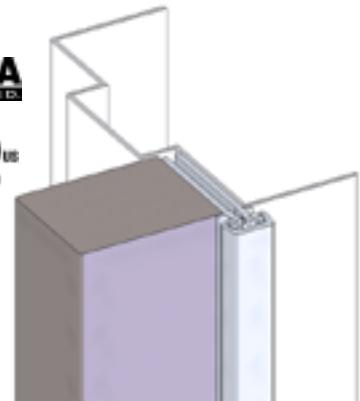
SPECIFICATIONS

Material:	Aluminum 6063-T6
Clearance:	5/16" (8 mm) hinge side plus standard lockside clearance
Fasteners:	<ul style="list-style-type: none"> Standard: Dril-Kwik® - #12-24 x 11/16" Flat Head Screws Optional: 1/2 Dril-Kwik® Screws, 1/2 Wood Screws Additional options available upon request
LL Fasteners:	<ul style="list-style-type: none"> Standard: 1/2 Dril-Kwik® Screws, 1/2 Wood Screws Optional: Dril-Kwik® - #12-24 x 11/16" Flat Head Screws Additional options available upon request
Length Options:	Standard and custom lengths available
Door/Frame Reinforcement:	None required to 200 lbs., heavier weight use 16-gauge channel
Optional Fire Rating:	Up to 3-hour metal and 90 minute wood composite (with studs)
Notes:	See additional fire rating details on page 3

FEATURES

- Heavy duty for high frequency doors or heavy, medium frequency doors. All for doors 2" (51 mm) thick or greater.
- Lead lined model for hospital x-ray room doors with double row of screws to straddle lead (Specify "LL")
- Frame and door leaf alignment ribs for proper hinge and door location


BHMA
CERTIFIED


UL LISTED


Length Inches	Millimeters	Fastener Count			
		# Per Door HD	# Per Door LL	# Per Jamb HD	# Per Jamb LL
79	2007	15	32	15	32
83	2108	19	36	19	36
85	2159	19	36	19	36
95	2413	20	42	20	42
119	3023	23	48	23	48

