

A46  
Hinges & pivotsB  
Pulls & platesC  
Flush bolts & coordinatorsD  
Latches, catches & boltsE  
StopsF  
Exterior hardwareG  
Miscellaneous hardware

### 705 Full mortise, full wrap pin and barrel continuous hinge - stainless steel

- Full wrap edge guard
- Adjustable for undersized and out of square doors
- 1/4" diameter pin with nylon self-lubricating, medical grade split bearing
- For doors weighing up to 300 pounds without reinforcing. 600 pounds with reinforcing
- Flush mounted, no inset
- 48" Maximum door width
- Non handed, handing required for custom cut lengths
- Bevel or square edge door

#### Certifications

- Meets ANSI 156.26
- UL10C certified

#### Standard lengths

- 83", 85", 95", 120"

#### Standard mounting hardware

- #10 X 1 1/2" Self drilling, self tapping screws
- #10 X 1" Wood screws

#### Material

- 14 Gauge Type 304 stainless steel

#### Finishes

BHMA	Description	Substrate	Finish
630	Satin stainless steel	Stainless steel	US32D

Custom paint available, consult factory.

#### Options


- HT ..... Hospital tip
- EPT ..... Electric Power Transfer
- TW8 ..... Electrical Through Wire
- CON ..... Allegion Connect

#### Optional mounting hardware

- SECHM ..... Security screws - hollow metal door and frame
- SECWDHM ..... Security screws - 1/2 wood, 1/2 hollow metal
- SECWDWD ..... Security screws - wood door and frame
- WD ..... Wood door and frame

#### For single door applications:

For pairs of doors see chart and general information

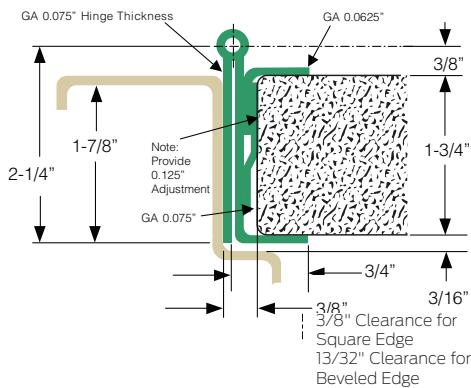

\* Adjusta-Stud allows up to 3/8" width adjustment which ensures proper alignment and easy installation. Adjusta-Stud also makes it possible for future adjustments of the door on the frame through repositioning.