



L-VRSG-2, L-VRSG-3

Vandal Resistant Security Louver

PRODUCT CUT SHEET



PROJECT:
SUBMITTED BY:
DATE:
NOTES:

For 1 3/4" Thick Doors

- 18 Ga. Cold Rolled Steel Frame
- Mitered and Welded Corners
- Welded Reinforcing Clips at Corners
- Inverted "V" Design
- Blades 24 Ga. Steel, Hemmed Edges
- 16 Ga. Steel, 3/4" x 3/4" Security Grille
- #6 x 1 3/4" Phillips Truss Head SMS
- Free Area 45%
- Gray Primer (GPZ) Powder Coat Finish

Available Options

- Powder Coat Color Options - See Color Chart on ngp.com
- Thru-Bolts (TB) for 1 3/4" Thick Doors
- Aluminum Insect Screen - 22 Ga. 1/8" Square Mesh Installed Exterior Side Unless Requested Otherwise
- Torx Security Screws
- Galvanneal - A40 Steel
- Zinc Electro-Plating (Not Available on Insect Screen)

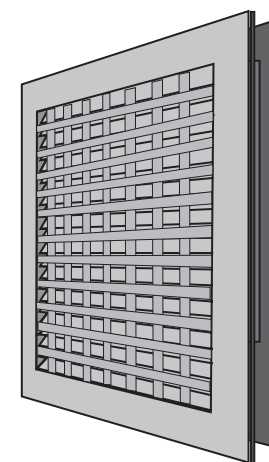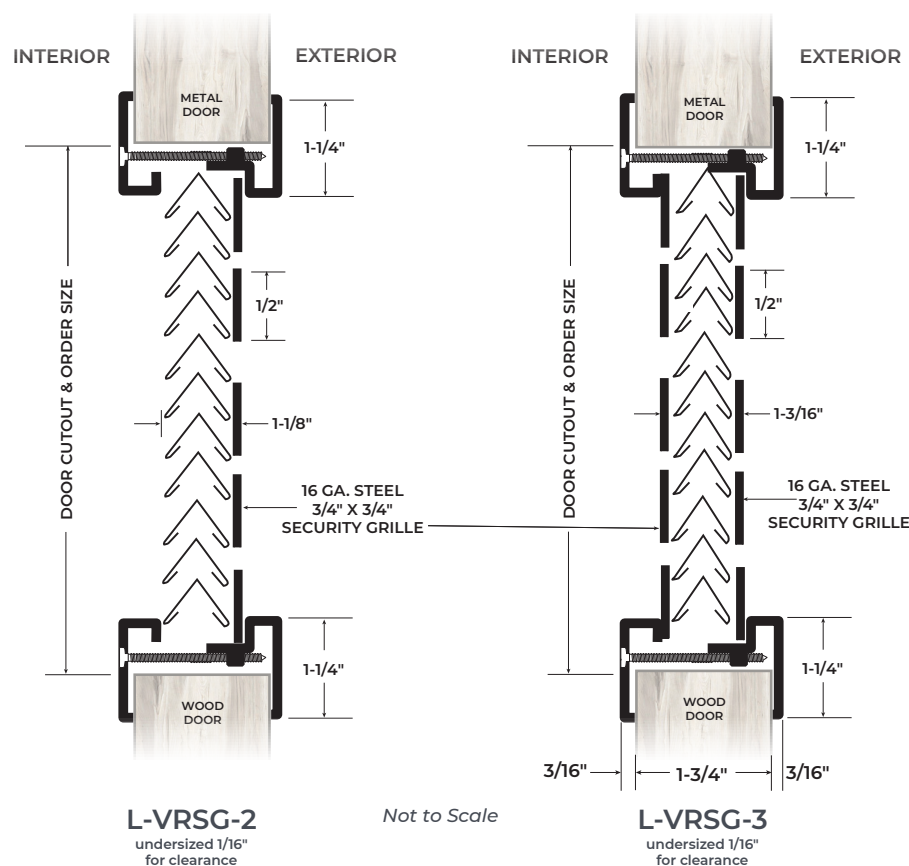

NGP-LIT-L-VRSG-2_L-VRSG-3-PCS-0822-A

NGP MEMPHIS
4985 East Raines Road
Memphis, TN 38118
orders@ngp.com

NGP VEGAS
4584 Calimesa Street
Las Vegas, NV 89115
vegasorders@ngp.com

ngp.com
1-800-NGP-RUSH