

# SELF-ADHESIVE SILICONE GASKETING

## SILICONE BULB FIRE AND SMOKE SEAL

- BHMA Certified to ANSI/BHMA A156.22 Performance Tests for Heat, Cold, Adhesive and Energy Performance

 **Edge Sealing System - Category G for 20 Minute Rated Category B Wood Doors Perimeter Application Up To:**

Single Swing 4'0 X 8'0  
Pairs 8'0 X 8'0

Use 9800 at the Meeting Edge of Pairs



Smoke and Draft Control - Category H  
Up To 3 Hours Hollow Metal Fire Doors  
Up To 90 Minutes Wood Fire Doors  
Use 5070 at the Meeting Edge of Pairs




Meets Requirements of RoHS Directive  
See Adhesive Specifications on Page G16

<b>5050B</b>	Brown
<b>5050C</b>	Charcoal
<b>5050W</b>	White
<b>5050CL</b>	Clear

Available in 17', 20', 21', 25' and 300'\* Rolls  
\*Clear Not Available in 300' Rolls



Pictured:  
**5050B**  
(Brown)

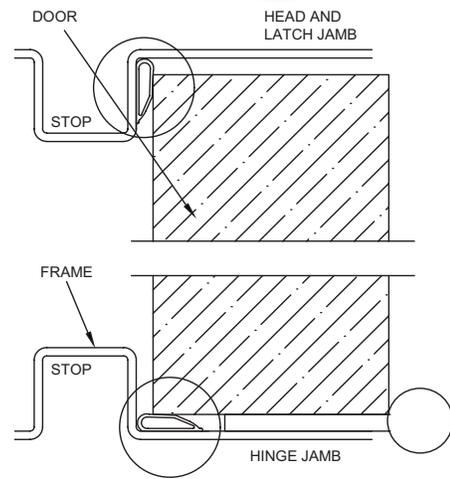

## LIGATURE-RESISTANT SILICONE BULB FIRE AND SMOKE SEAL

- Ligature-Resistant Feature has Serrations Every 8" Designed to Break Apart Preventing it From Being Used to Hang or Strangle
- Applications Include Psychiatric Facilities, Prisons and Other Treatment Facilities
- Installs as a Continuous Length Providing the Same Sealing Properties for Light, Sound, Air and Smoke as Our Original 5050
- BHMA Certified to ANSI/BHMA A156.22 Performance Tests for Heat, Cold, Adhesive and Energy Performance

**ANTI-LIG 5050C** Charcoal

Available in 17' and 300' Rolls



**Edge Sealing System - Category G for 20 Minute Rated Category B Wood Doors Perimeter Application Up To:**

Single Swing 4'0 X 8'0  
Pairs 8'0 X 8'0

Use 9800 at the Meeting Edge of Pairs



Smoke and Draft Control - Category H Up To 3 Hours Hollow Metal Fire Doors Up To 90 Minutes Wood Fire Doors  
Use 5070 at the Meeting Edge of Pairs



Meets Requirements of RoHS Directive  
See Adhesive Specifications on Page G16

