


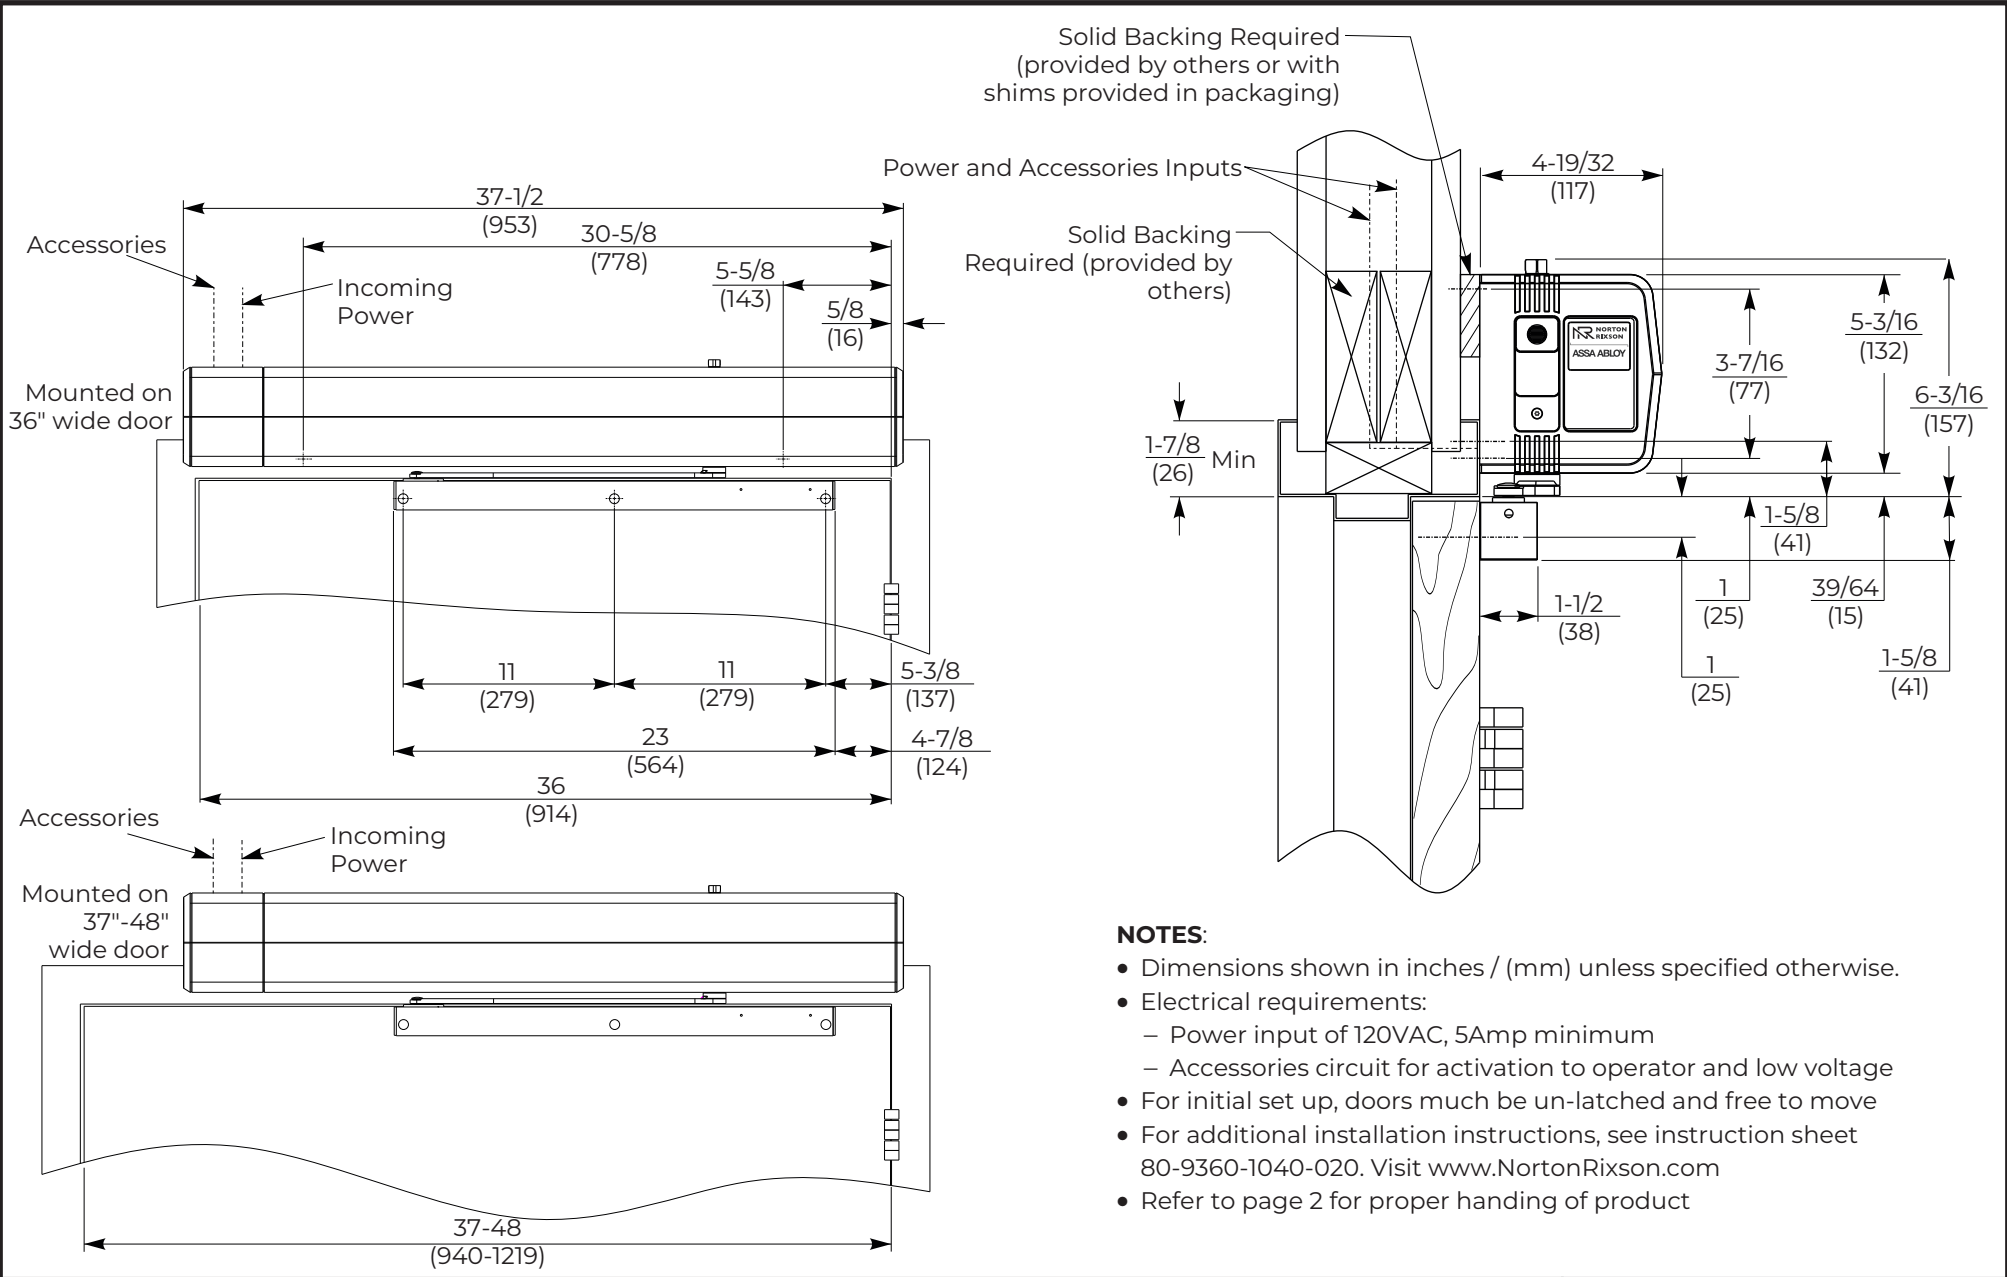

- NOTES:**
- Dimensions shown in inches / (mm) unless specified otherwise.
 - Electrical requirements:
 - Power input of 120VAC, 5Amp minimum
 - Accessories circuit for activation to operator and low voltage
 - For initial set up, doors much be un-latched and free to move
 - For additional installation instructions, see instruction sheet 80-9360-1040-020. Visit www.NortonRixson.com
 - Refer to page 2 for proper handing of product

**6011 Series Template
for 36"-48" wide door
shown with up to 5" Butt Hinges
Maximum reveal of 1/8"**


Approved 2023-07-12

Page 1




TEMPLATE NUMBER	REV	DATE
7360-1045	2	05/23

Single Push Side

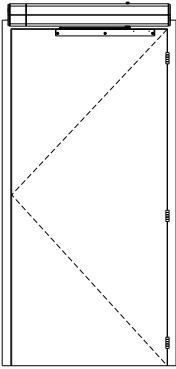


NOTE:
- All illustrations on this page
shown with 36" (914mm)
wide doors


Left Hand
Door
(view from below)




Right Hand
Door
(view from below)




Double Door Push Side

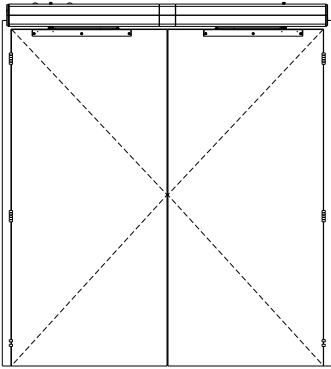



Right Hand
Door
(view from below)




Left Hand
Door
(view from below)





Double Door Double Egress Left Hand

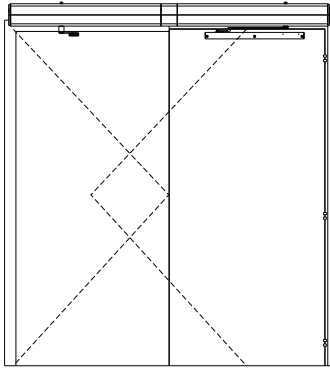



Single Pull Side

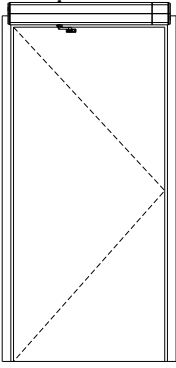

Double Door Pull Side

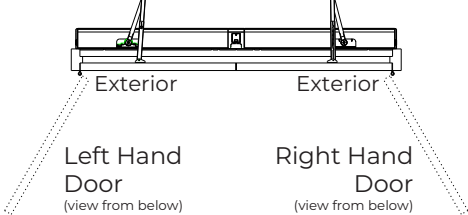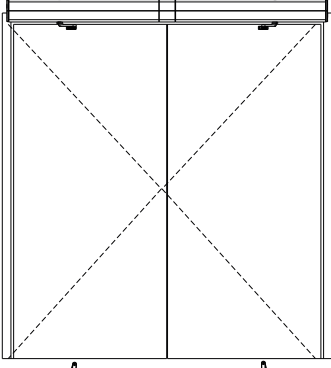

Double Door Double Egress Right Hand

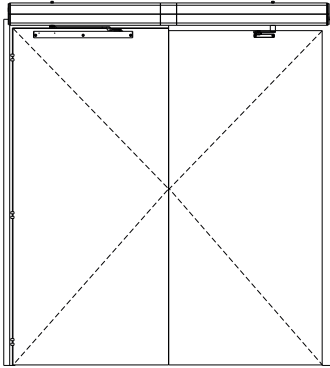


**6011 Series Template
for 36"-48" wide door
shown with up to 5" Butt Hinges
Maximum reveal of 1/8"**

Approved 2023-07-12

Page 2



TEMPLATE NUMBER	REV	DATE
7360-1045	2	05/23

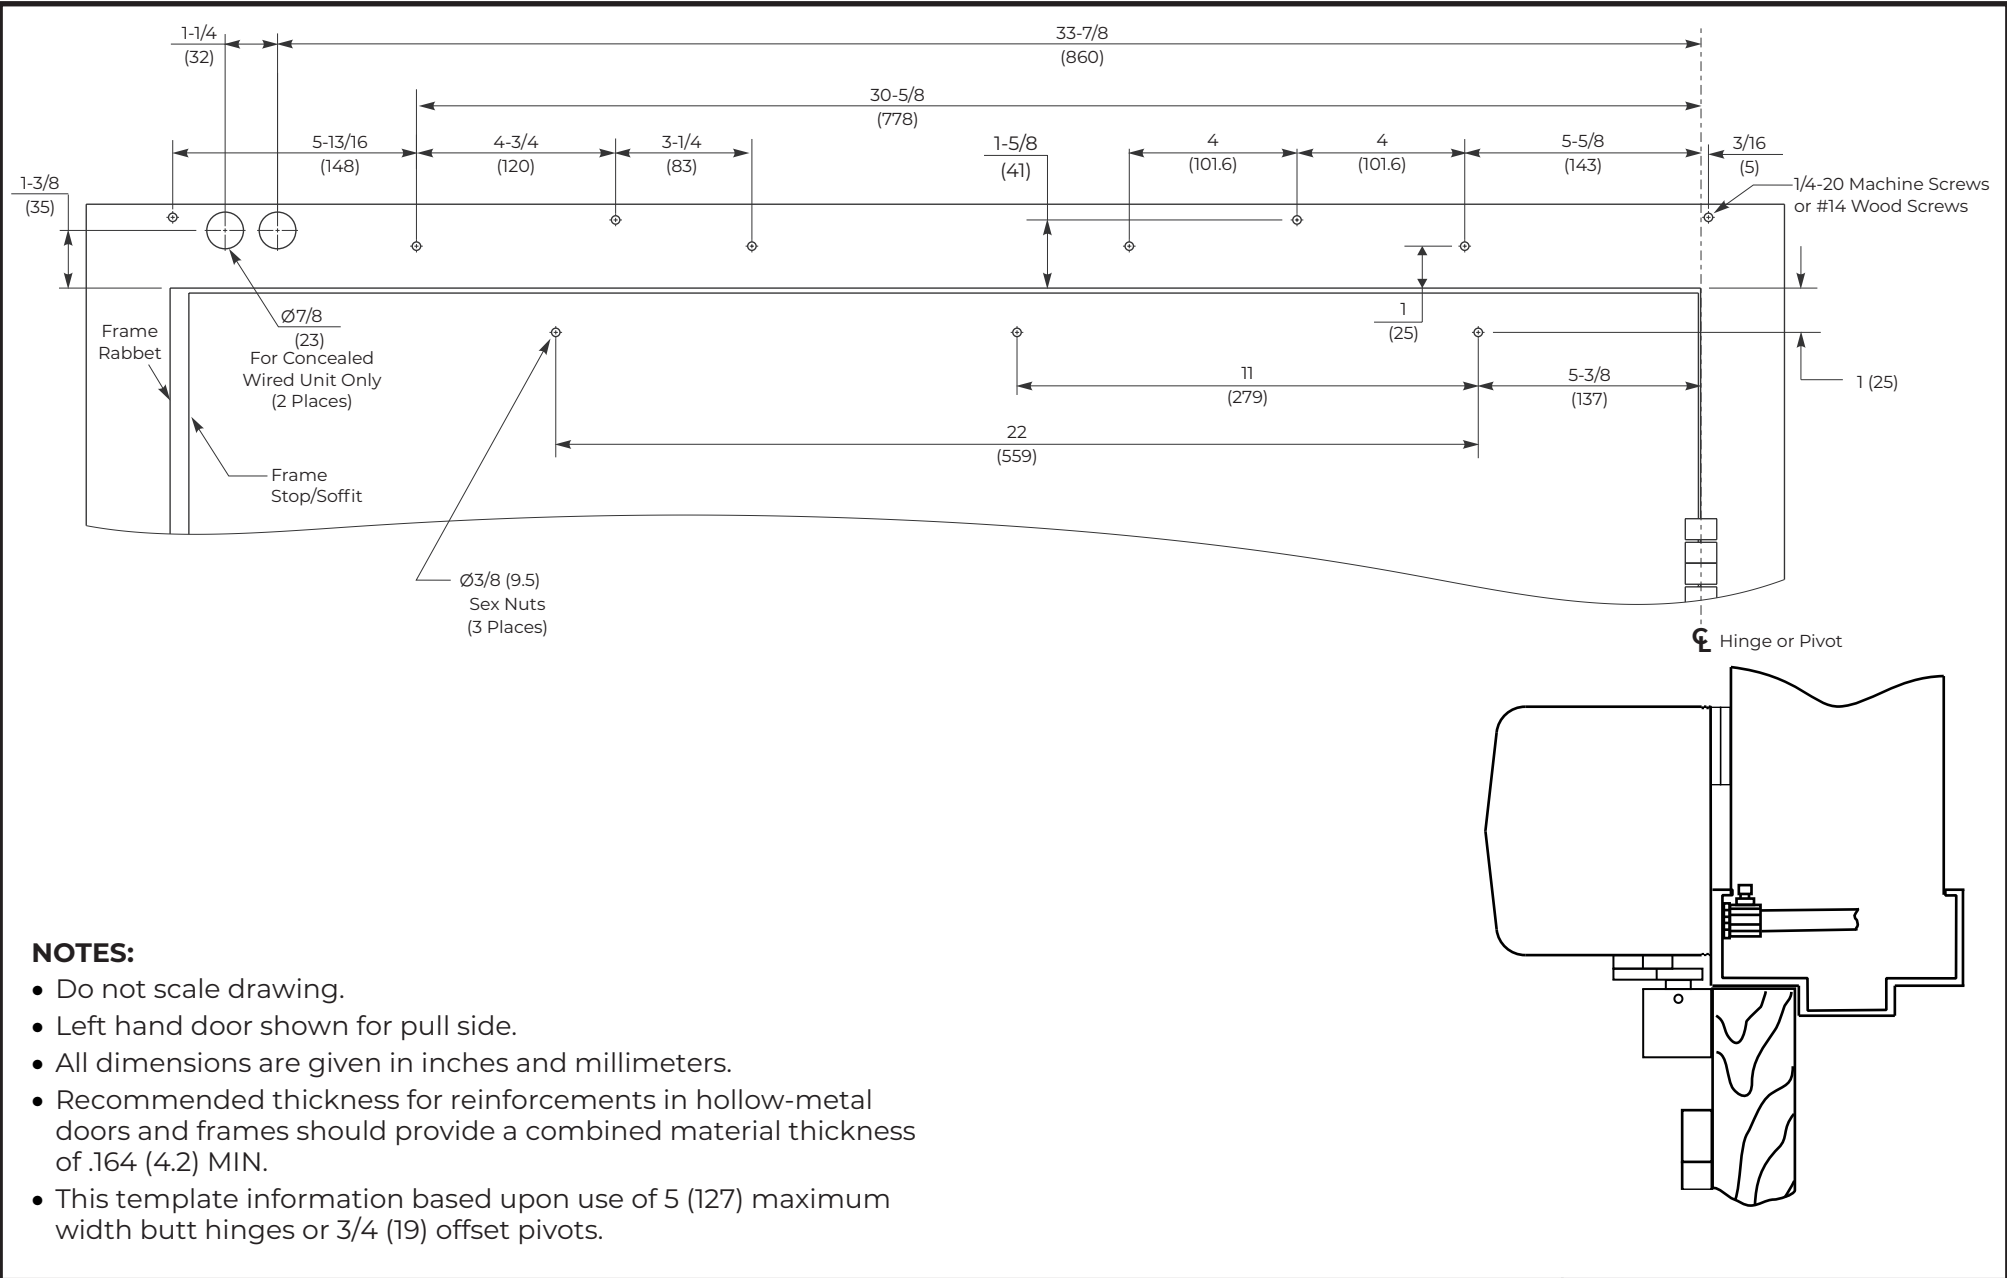

- NOTES:**
- Do not scale drawing.
 - Left hand door shown for pull side.
 - All dimensions are given in inches and millimeters.
 - Recommended thickness for reinforcements in hollow-metal doors and frames should provide a combined material thickness of .164 (4.2) MIN.
 - This template information based upon use of 5 (127) maximum width butt hinges or 3/4 (19) offset pivots.

**6011 Series Template
for 36"-48" wide door
shown with up to 5" Butt Hinges
Maximum reveal of 1/8"**

Approved 2023-07-12

Page 3



TEMPLATE NUMBER	REV	DATE
7360-1045	2	05/23