


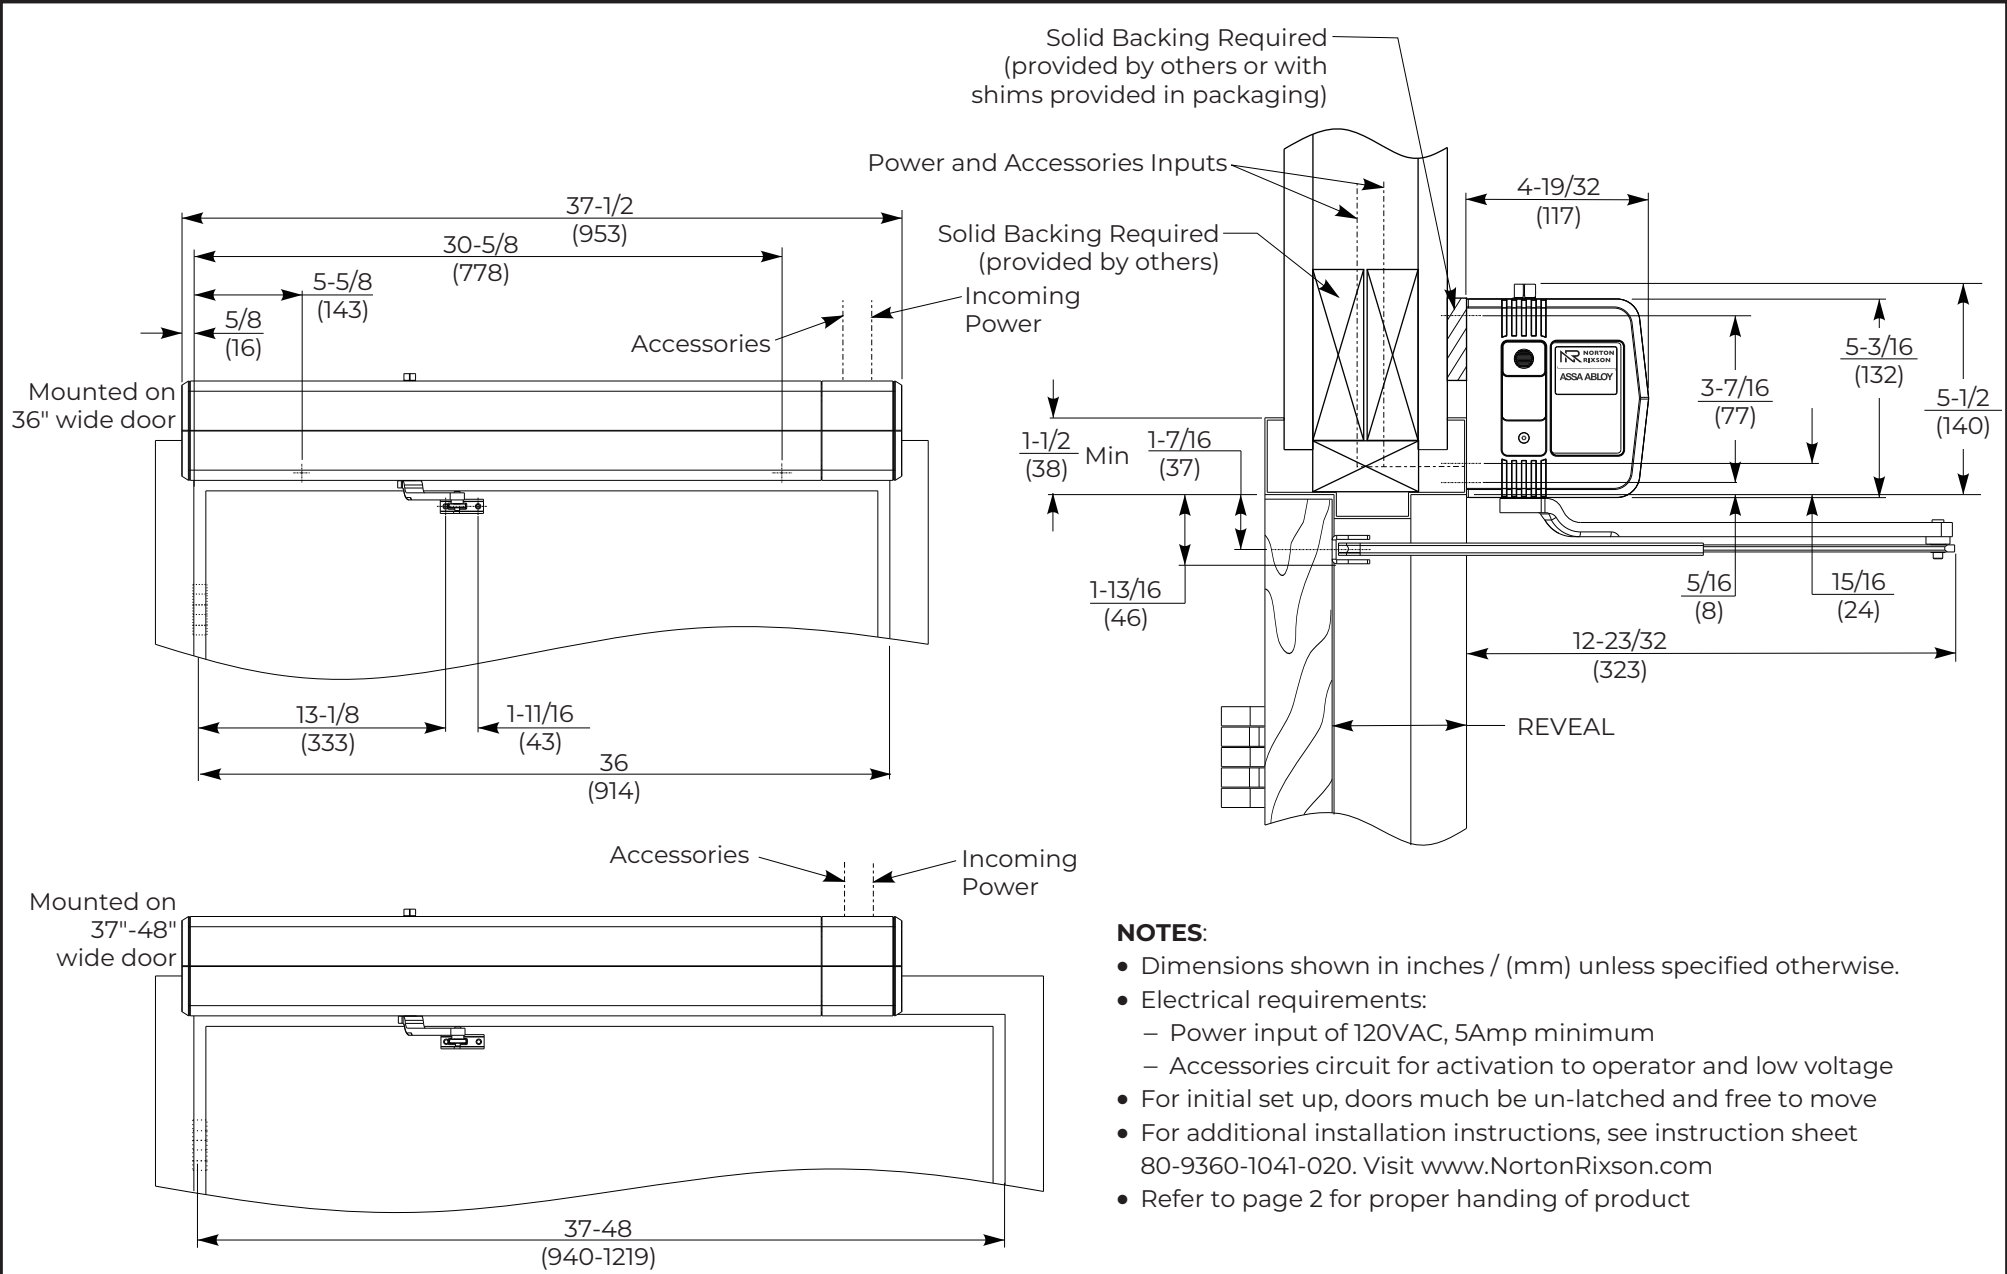

- NOTES:**
- Dimensions shown in inches / (mm) unless specified otherwise.
 - Electrical requirements:
 - Power input of 120VAC, 5Amp minimum
 - Accessories circuit for activation to operator and low voltage
 - For initial set up, doors must be un-latched and free to move
 - For additional installation instructions, see instruction sheet 80-9360-1041-020. Visit www.NortonRixson.com
 - Refer to page 2 for proper handling of product

6021 Series Template
for 36"-48" frames with up to 5" Butt Hinges
(shown on 36" and 37"-48" wide frames)
Maximum reveal of 6-7/8" and Maximum of 110° of opening


Approved 2023-07-12

Page 1

NORTON RIXSON
ASSA ABLOY

TEMPLATE NUMBER	REV	DATE
7360-1046	2	05/23



Single Push Side

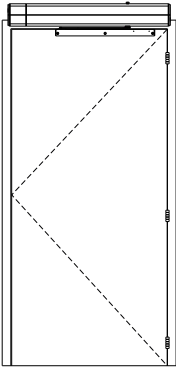


NOTE:
- All illustrations on this page
shown with 36" (914mm)
wide doors

Left Hand
Door
(view from below)

Right Hand
Door
(view from below)




Double Door Push Side

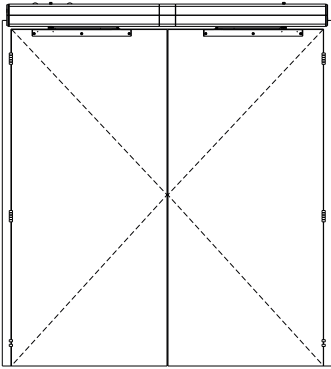


Right Hand
Door
(view from below)

Left Hand
Door
(view from below)



Double Door Double Egress Left Hand

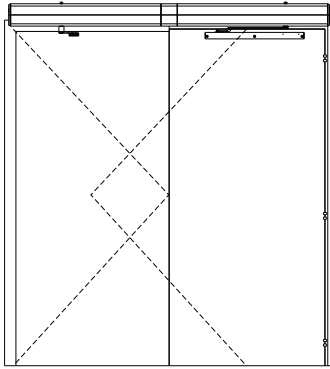


Interior

Left Hand
Door



Interior

Single Pull Side

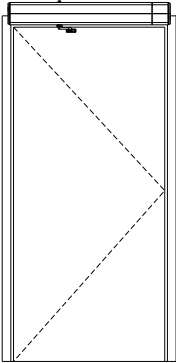


Exterior
Right Hand
Door
(view from below)



Exterior
Left Hand
Door
(view from below)

Double Door Pull Side

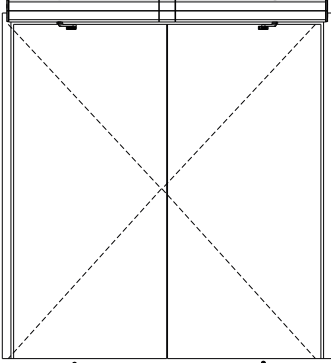


Left Hand
Door
(view from below)




Right Hand
Door
(view from below)

Double Door Double Egress Right Hand

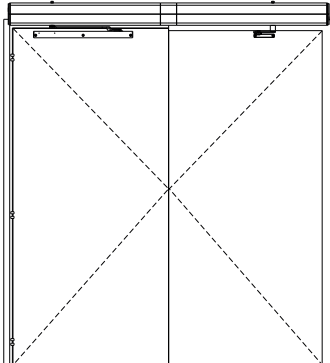

Right Hand
Door
(view from below)

Interior



Interior

Right Hand
Door


6021 Series Template
for 36"-48" frames with up to 5" Butt Hinges
(shown on 36" and 37"-48" wide frames)
Maximum reveal of 6-7/8" and Maximum of 110° of opening

Approved 2023-07-12

Page 2



TEMPLATE NUMBER	REV	DATE
7360-1046	2	05/23

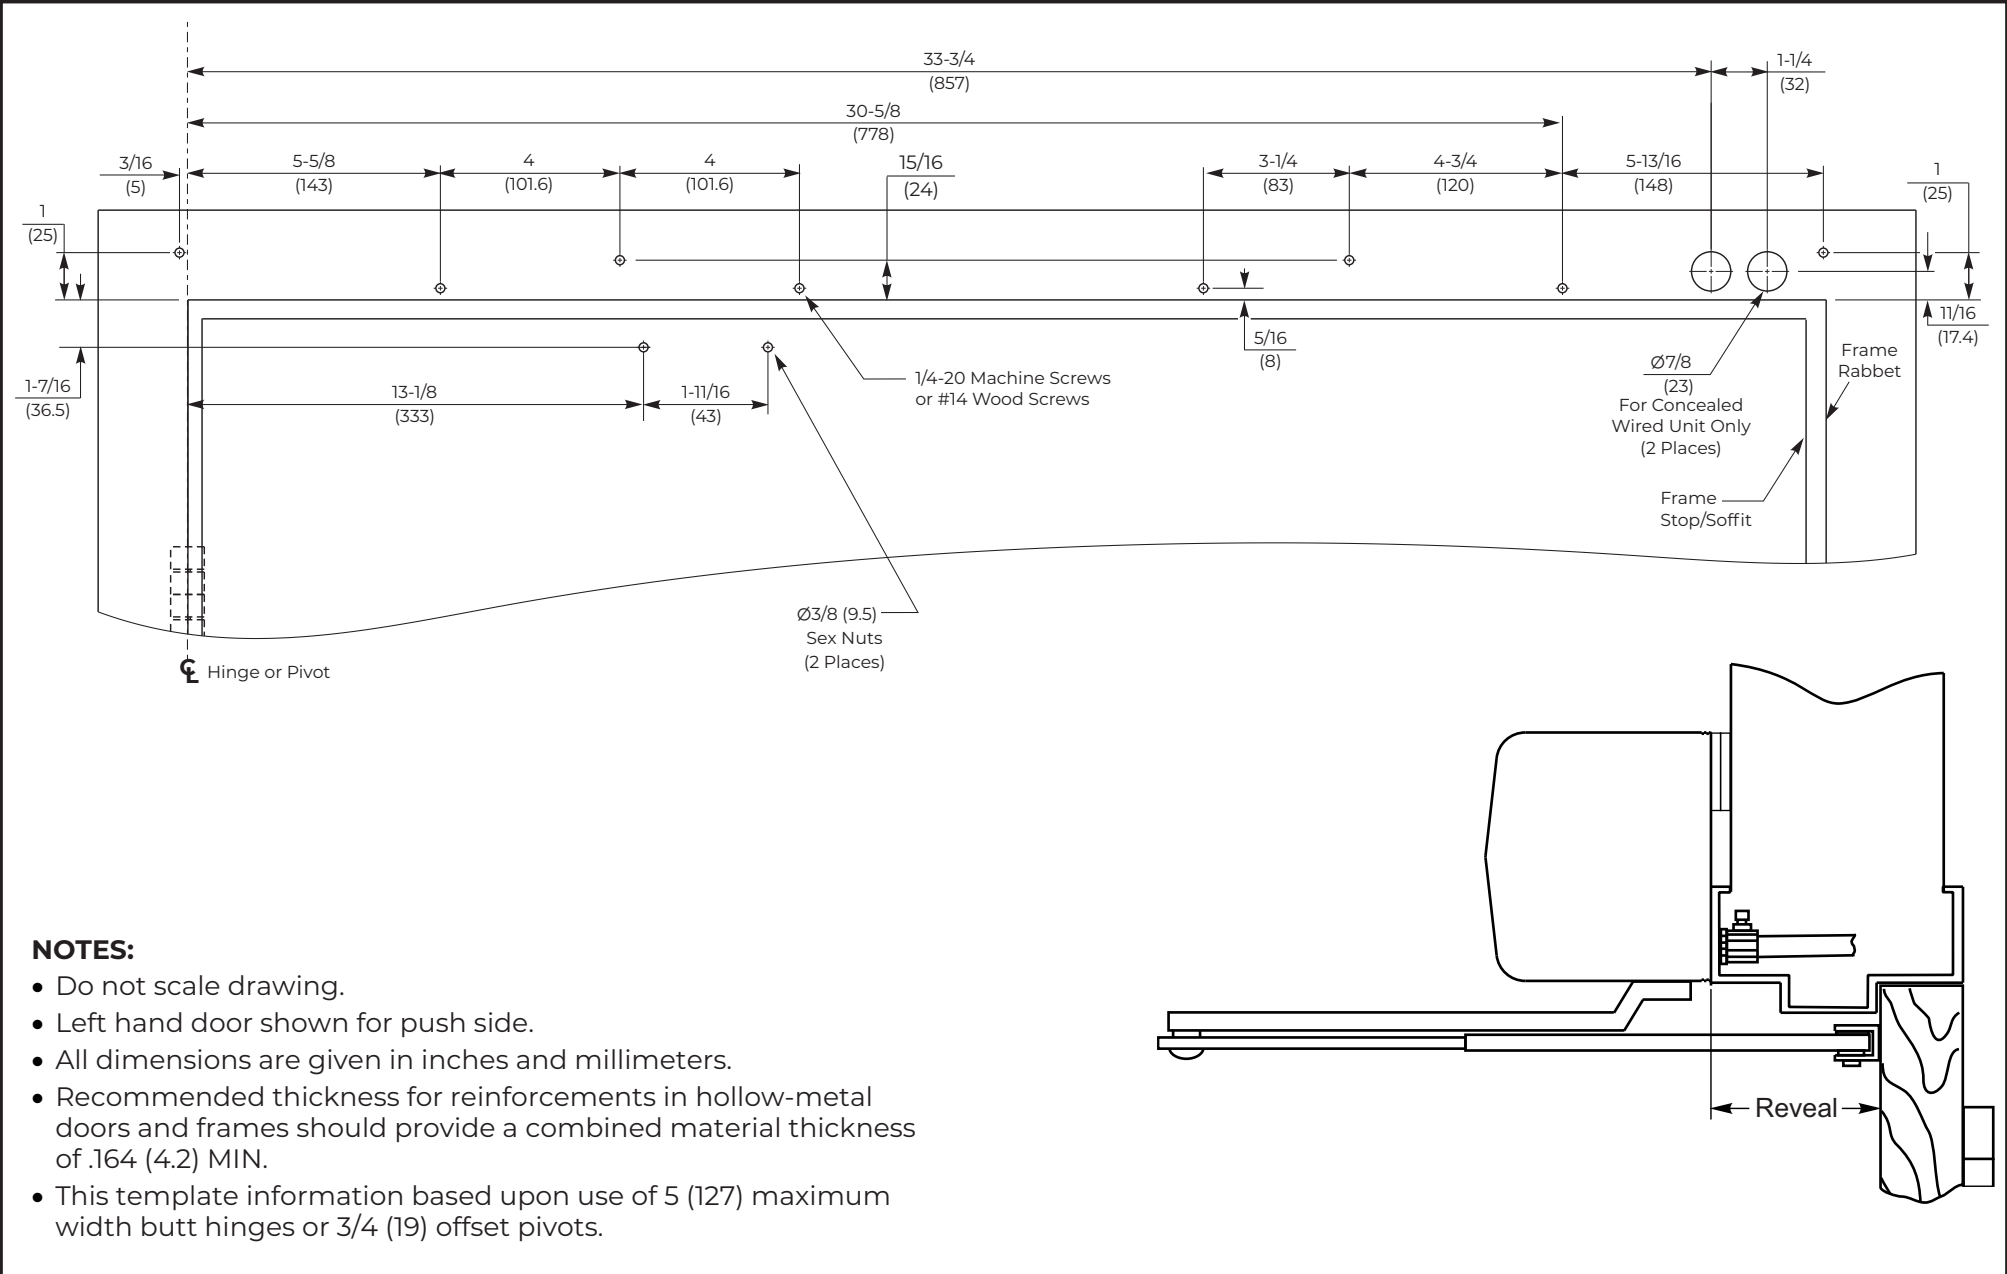

- NOTES:**
- Do not scale drawing.
 - Left hand door shown for push side.
 - All dimensions are given in inches and millimeters.
 - Recommended thickness for reinforcements in hollow-metal doors and frames should provide a combined material thickness of .164 (4.2) MIN.
 - This template information based upon use of 5 (127) maximum width butt hinges or 3/4 (19) offset pivots.

6021 Series Template
for 36"-48" frames with up to 5" Butt Hinges
(shown on 36" and 37"-48" wide frames)
Maximum reveal of 6-7/8" and Maximum of 110° of opening

Page 3			
	TEMPLATE NUMBER	REV	DATE
	7360-1046	2	05/23