


Door Angle	85°	90°	95°	100°	105°	110°
Dim A	13-1/4" (337mm)	12-5/8" (320mm)	12" (305mm)	11-1/2" (292mm)	11-1/8" (283mm)	10-3/4" (273mm)

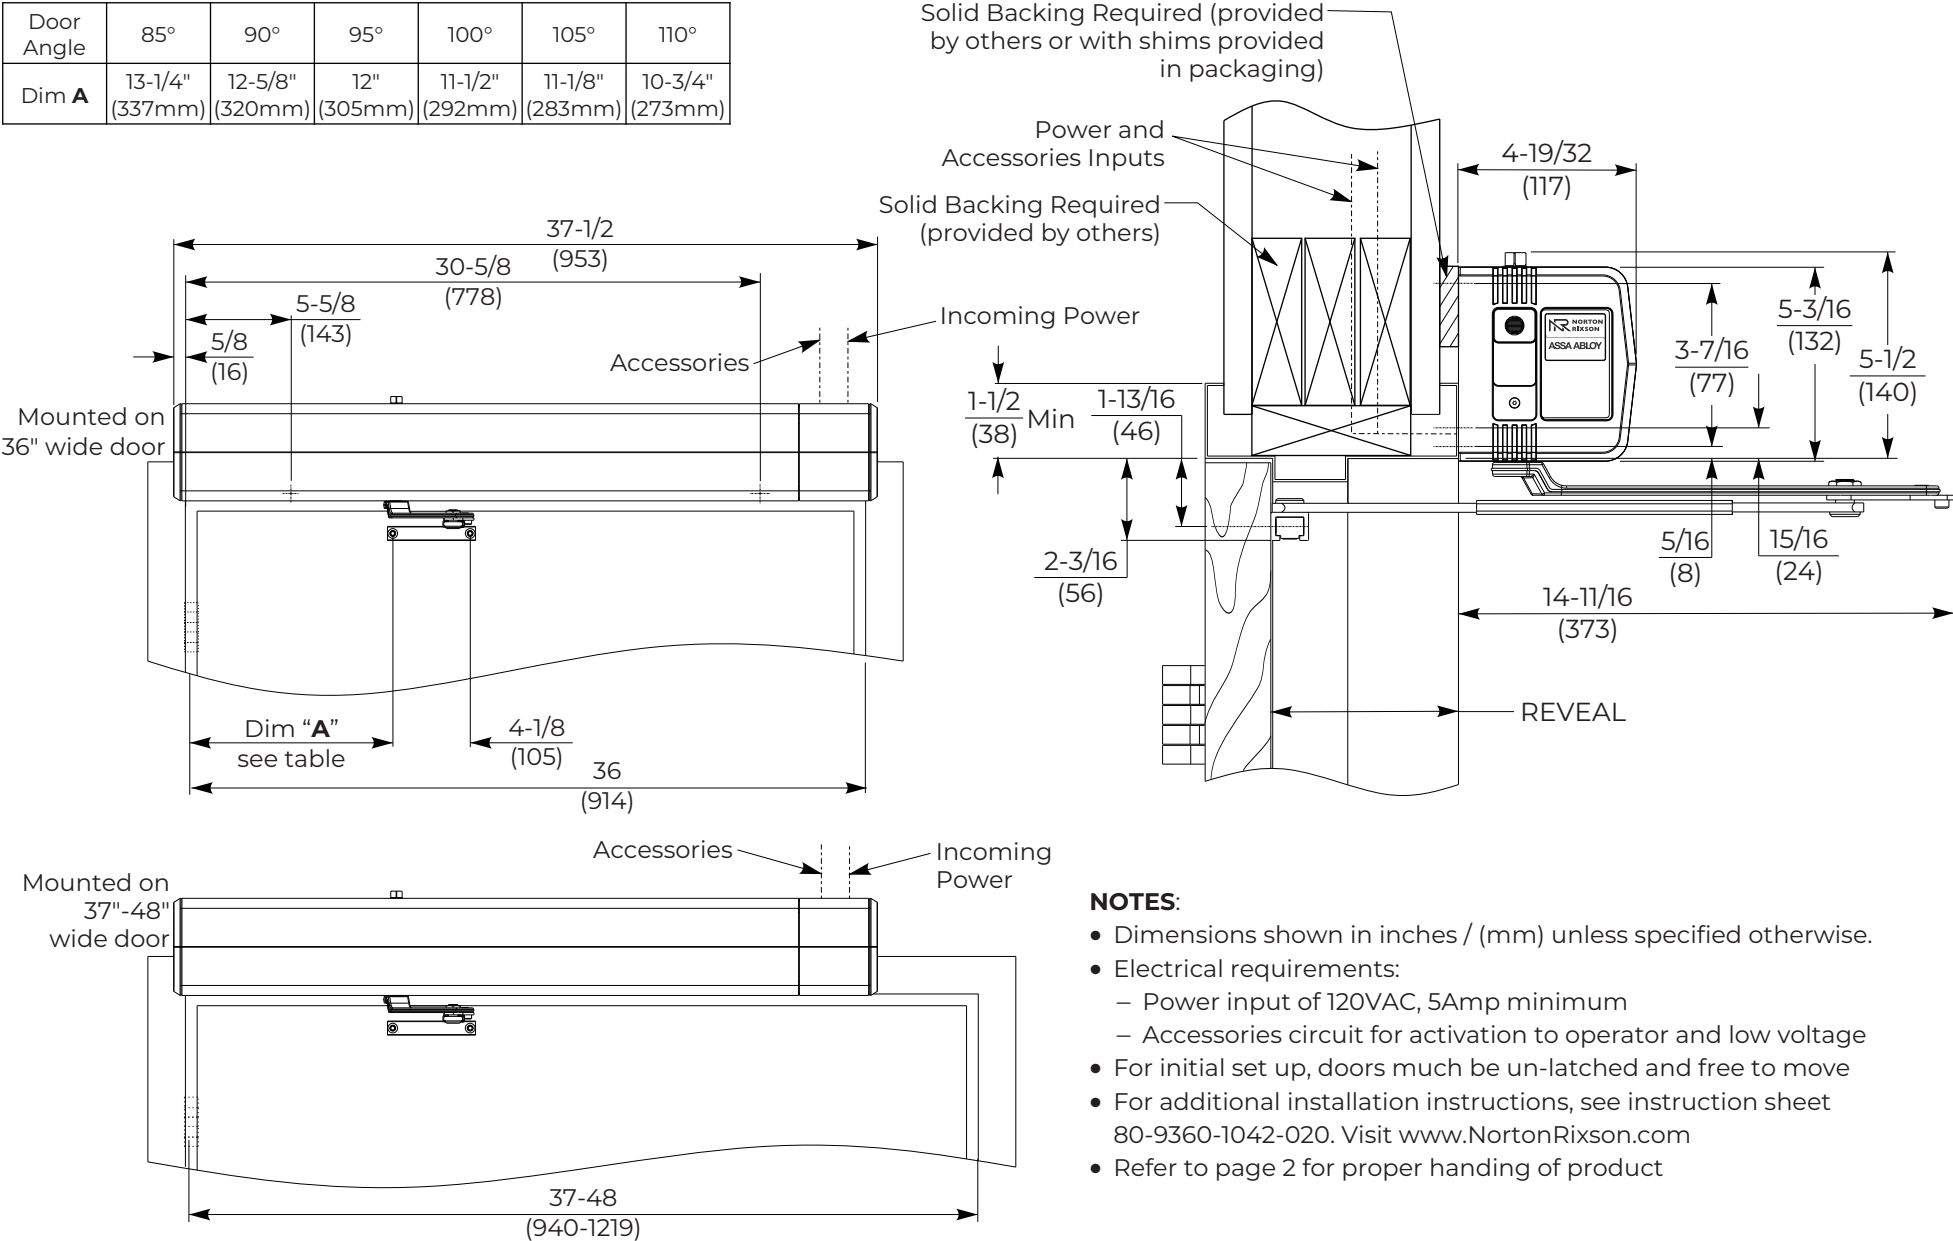

- NOTES:**
- Dimensions shown in inches / (mm) unless specified otherwise.
 - Electrical requirements:
 - Power input of 120VAC, 5Amp minimum
 - Accessories circuit for activation to operator and low voltage
 - For initial set up, doors must be un-latched and free to move
 - For additional installation instructions, see instruction sheet 80-9360-1042-020. Visit www.NortonRixson.com
 - Refer to page 2 for proper handling of product

**6071 Series Template
for 36"-48" frames with up to 5" Butt Hinges
(shown on 36" and 37"-48" wide frames)
Reveal of 4-13/16" to 7-3/8" and Opening of 85° to 110°**


Approved 2023-07-12

Page 1



TEMPLATE NUMBER	REV	DATE
7360-1050	2	05/23

Single Push Side

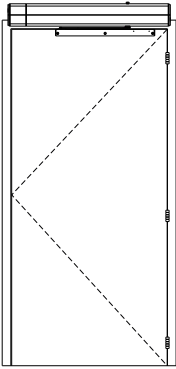

NOTE:
- All illustrations on this page
shown with 36" (914mm)
wide doors


Left Hand
Door
(view from below)

Right Hand
Door
(view from below)

Interior

Interior

Double Door Push Side

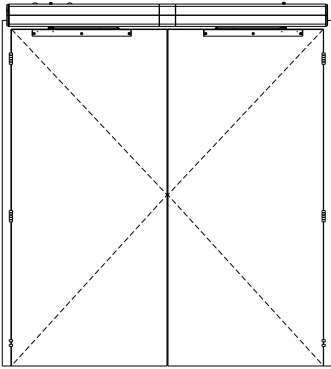


Right Hand
Door
(view from below)

Left Hand
Door
(view from below)

Interior

Interior

Double Door Double Egress Left Hand

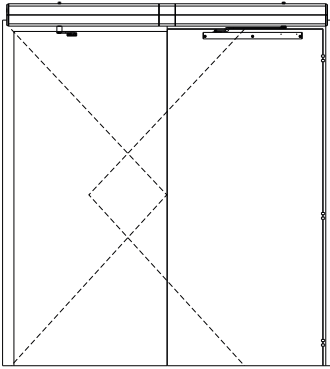


Interior

Left Hand
Door
(view from below)

Left Hand
Door
(view from below)

Interior

Single Pull Side

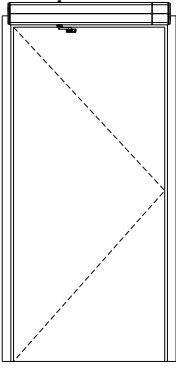


Exterior

Exterior

Right Hand
Door
(view from below)

Left Hand
Door
(view from below)

Double Door Pull Side

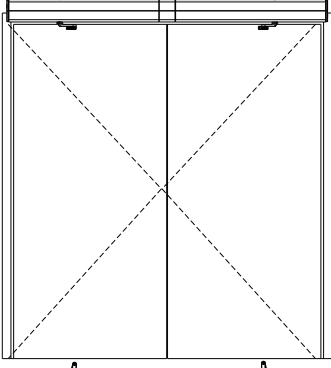


Exterior

Exterior

Left Hand
Door
(view from below)

Right Hand
Door
(view from below)

Double Door Double Egress Right Hand

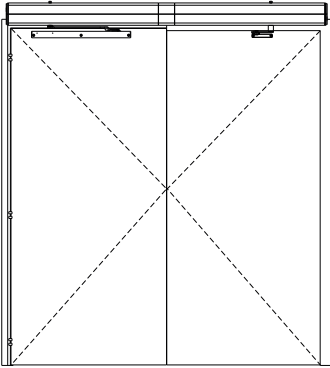

Right Hand
Door
(view from below)

Interior

Interior

Right Hand
Door
(view from below)

6071 Series Template
for 36"-48" frames with up to 5" Butt Hinges
(shown on 36" and 37"-48" wide frames)
Reveal of 4-13/16" to 7-3/8" and Opening of 85° to 110°

Approved 2023-07-12


Page 2


ASSA ABLOY

TEMPLATE NUMBER
7360-1050

REV
2

DATE
05/23

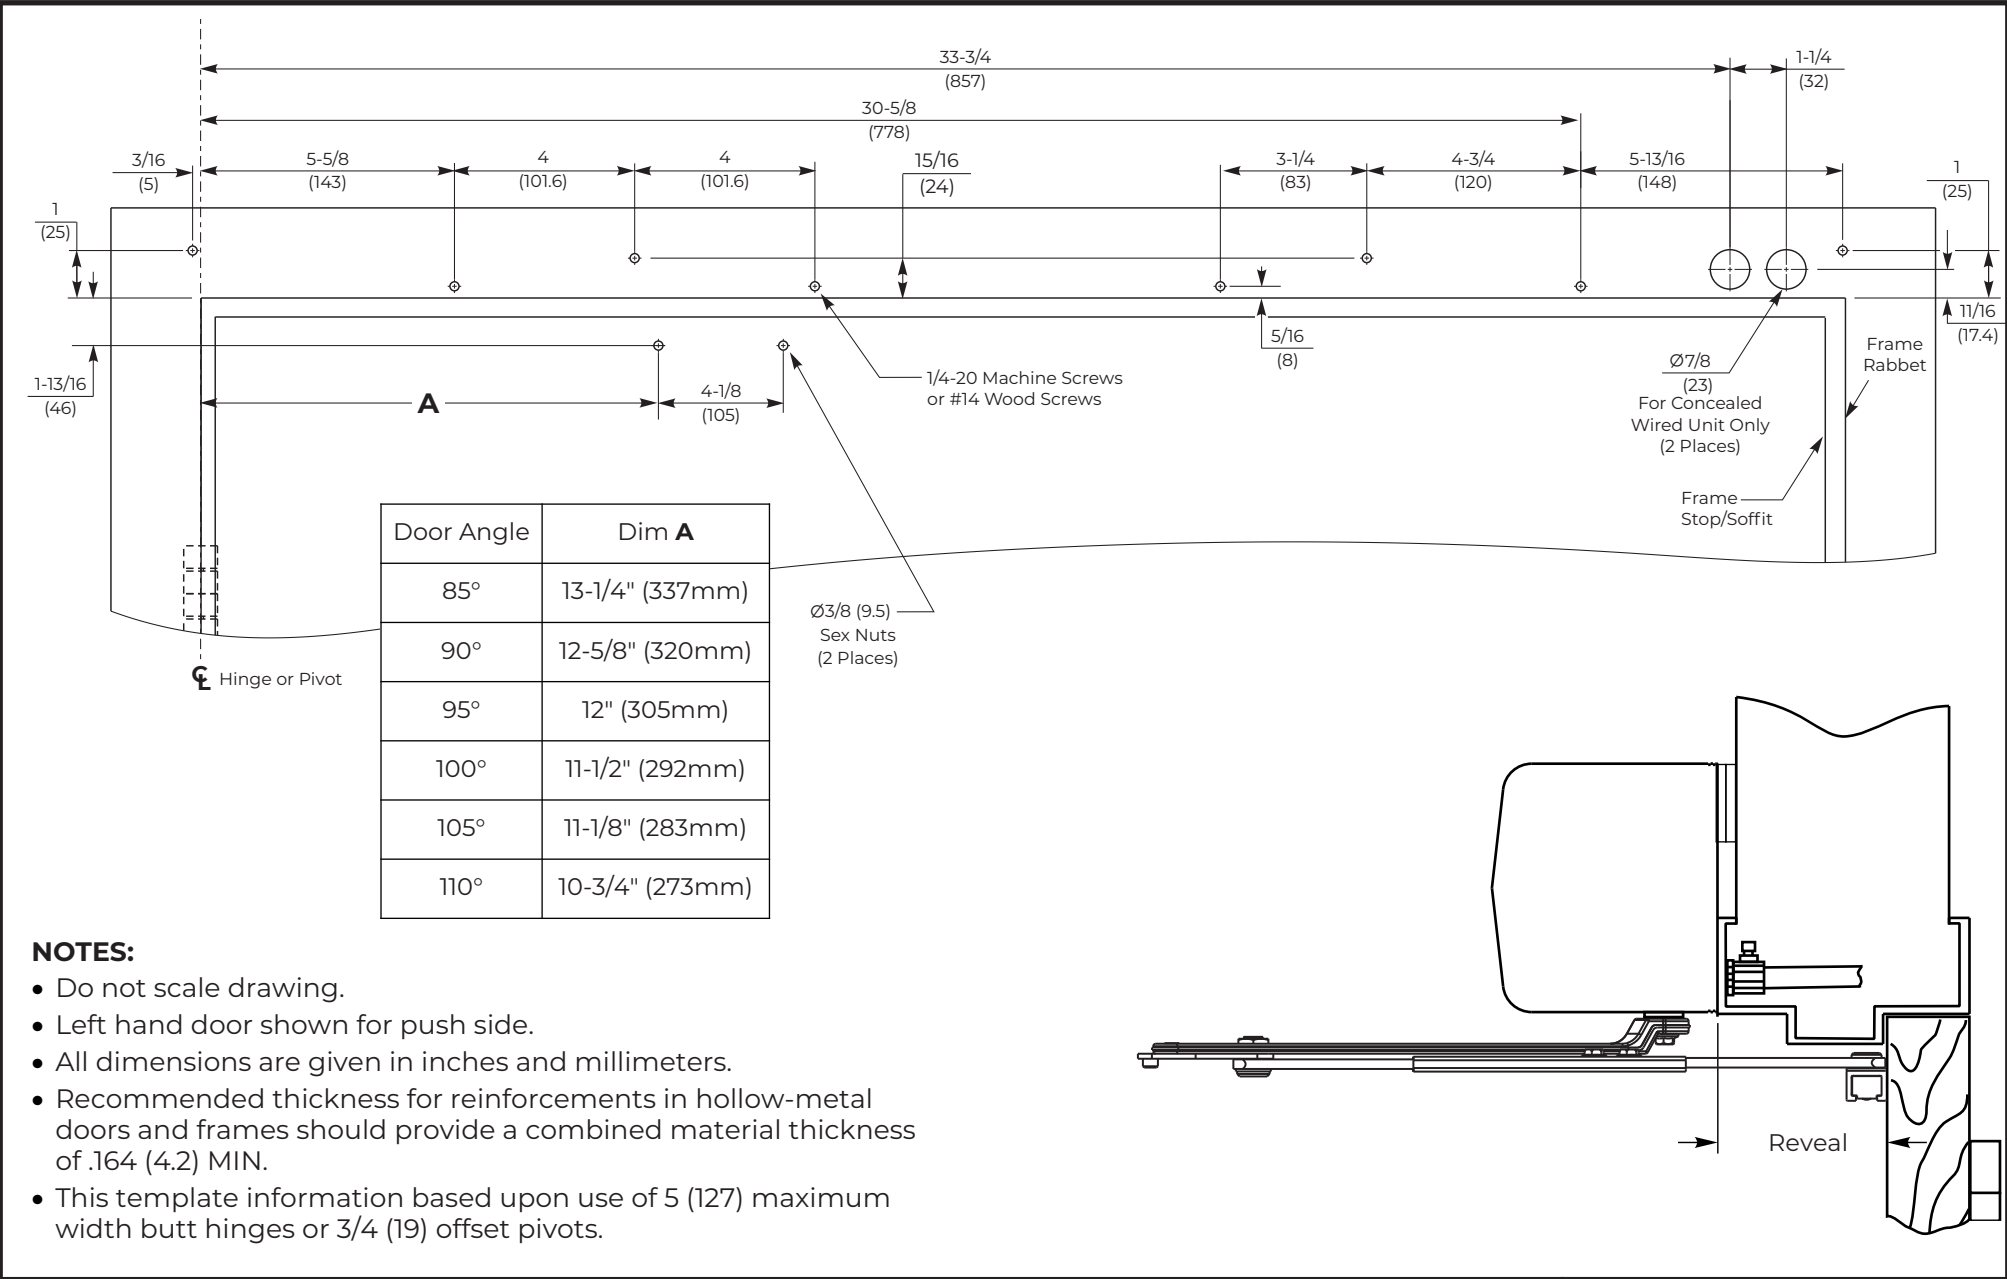

- NOTES:**
- Do not scale drawing.
 - Left hand door shown for push side.
 - All dimensions are given in inches and millimeters.
 - Recommended thickness for reinforcements in hollow-metal doors and frames should provide a combined material thickness of .164 (4.2) MIN.
 - This template information based upon use of 5 (127) maximum width butt hinges or 3/4 (19) offset pivots.

6071 Series Template
for 36"-48" frames with up to 5" Butt Hinges
(shown on 36" and 37"-48" wide frames)
Reveal of 4-13/16" to 7-3/8" and Opening of 85° to 110°

Approved 2023-07-12

Page 3


ASSA ABLOY

TEMPLATE NUMBER	REV	DATE
7360-1050	2	05/23