


Product Overview

The ALREX PRO GLASS Hydraulic Door-Closer Hinge redefines door control, blending hydraulic precision with spring-hinge reliability. Built for demanding environments, its heavy-duty design ensures smooth, code-compliant performance while preventing disruptive slams. Perfectly designed for glass doors in all environments.

Common Sets

Door Weight	Door Size	Closer Hinge / Free Swing Hinge
Up to 150 lbs	3'0" x 7'0"	2 Hydraulic / 1 Free Swing
Up to 200 lbs	3'0" x 7'0"	3 Hydraulic
Up to 200 lbs	3'0" x 8'0"	3 Hydraulic / 1 Free Swing
Up to 250 lbs	3'0" x 8'0"	4 Hydraulic
Up to 180 lbs	4'0" x 7'0"	3 Hydraulic
Up to 220 lbs	4'0" x 7'0"	3 Hydraulic / 1 Free Swing
Up to 200 lbs	4'0" x 8'0"	3 Hydraulic / 1 Free Swing
Up to 250 lbs	4'0" x 8'0"	4 Hydraulic



Features


- Hydraulic speed control with adjustable tension
- Marine-grade aluminum alloy body
- ANSI BHMA 156.17 certified (1M+ cycles)
- Easy installation without glass shimming
- Adjustable latching mechanism

Applications

- Office partitions
- Shower enclosures
- Luxury retail stores
- Glass conference rooms
- High-end residential interiors

Specifications

- Material (Body): Aluminum Alloy
- Material (Internal): Stainless Steel
- Glass Thickness: 8 mm – 12 mm
- Operating Temp: -40°F to 212°F
- Hole Pattern: ANSI (on frame)

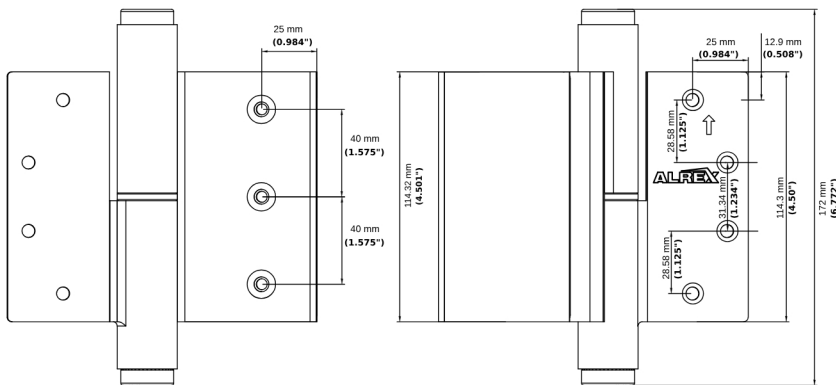

±0.011"

±0.011"

