

E7000

Rim Type



FEATURES & OPTIONS

Door Width

For all doors up to 36" or 48" wide

Stile

4-1/4" minimum

Material

Push bar is made of extruded anodize aluminum and spring is made of stainless steel

Dogging

1/4" turn, hex key dogging (non-fire rated only, E7000)

Strike

For 5/8" stop, plus shim for 1/2" stop

Latch Bolts

3/4" throw, stainless steel

Dead Latch Bolts

5/8" stainless steel

Mounting

Furnished standard with sheet metal & machine screws

Backset

2-3/4" standard

Handing

Non-handed

Projection

2-1/2" maximum projection, 1-3/4" when depressed

Operation

Exit by slight pressure on any point on the push bar at all time

WARRANTY


- Ten years mechanical warranty
- Five years finish warranty



CODE COMPLIANCE

- ANSI A156.3, Grade 1
- UL listed for Panic and UL10C, UBC 7-2-1997 codes

Available Trims

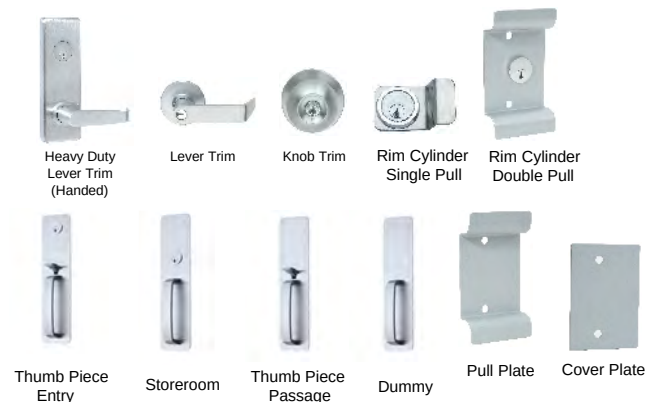


SPECIFICATIONS

Exit Device: Exit device shall be by Pamex model # **E7000** for standard exit opening. All exit devices shall be modern push pad type, non-handed. Hex-key dogging shall be provided only on non-fire rated exit device. Exit device shall be narrow profile; projecting only 2-1/4" from the surface of the door.

FINISHES

- ☐ Aluminum (Painted)
- ☐ Dark Bronze (Painted)
- ☐ Stainless Steel

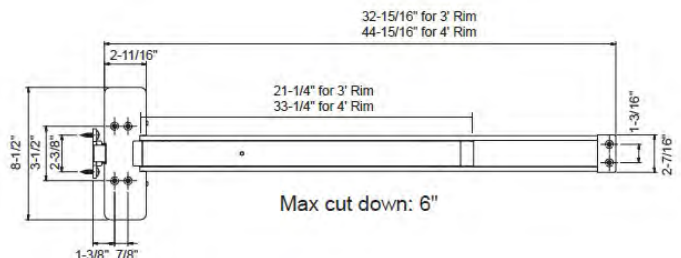

EF7000

Rim Type



FEATURES & OPTIONS

Fire Rated Rim Type Exit Device

Door Width

For all doors up to 36" or 48" wide

Stile

4-1/4" minimum

Material

Push bar is made of extruded anodize aluminum and spring is made of stainless steel

Strike

For 5/8" stop, plus shim for 1/2" stop

Latch Bolts

3/4" throw, stainless steel

Dead Latch Bolts

5/8" stainless steel

Mounting

Furnished standard with sheet metal & machine screws and SNB

Backset

2-3/4" standard

Handing

Non-handed

Projection

2-1/2" maximum projection, 1-7/8" when depressed

Operation

Exit by slight pressure on any point on the push bar at all time

SPECIFICATIONS

Exit Device: Exit device shall be by **Pamex** model # **EF7000** for UL fire barrier doors. All exit devices shall be modern push pad type, non-handed and provided with thru bolts for proper installation. EF7000 is UL listed for 3 hour fire and egress. Exit device shall be narrow profile; projecting only 2-1/4" from the surface of the door.

FINISHES

- ☐ Aluminum (Painted)
- ☐ Dark Bronze (Painted)
- ☐ Stainless Steel

WARRANTY

- Ten years mechanical warranty
- Five years finish warranty



ADA



CODE COMPLIANCE

- ANSI A156.3, Grade 1
- UL listed for Panic and UL10C, UBC 7-2-1997 codes
- UL 3 Hour Fire Rated

Available Trims

