

Continuous Geared Hinges

FULL SURFACE



- Full surface, heavy-duty
- 1/16" door inset
- For narrow-faced frames
- 450 lbs. door weight maximum
- 48" door width maximum
- Material: Aluminum
- Fasteners: 12-24x7/8" undercut self-drilling, thread-forming tek machine screws for frame and 1/4-20 sex bolts and shoulder bolts for door.
- Fire Rating: Approved for use on metal swinging type fire doors rated up to and including 90 minutes and on wood swinging type fire doors rated up to and including 60 minutes



Model #	Type	Insert	Length
HCFS570-83	Full Surface	1/16"	83"
HCFS570-95	Full Surface	1/16"	95"

FINISH AVAILABILITY

- Clear
- Dark Bronze

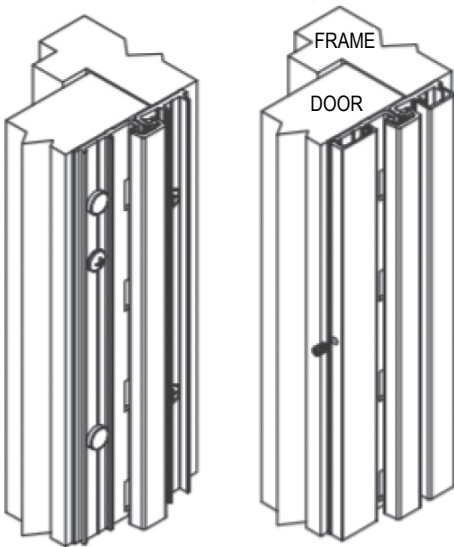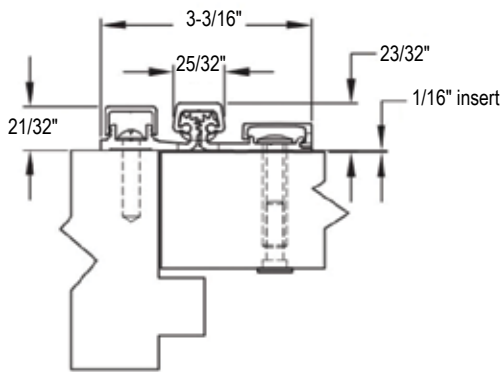

CROSS REFERENCES

PAMEX	Hager	Pemko	McKinney	Stanley	Ives	ABH	Select	Cal-Royal
HCFS570	780-157	FS CP	MCK-58	664	157	A570	SL57	CRHD781570