

E9000V

Vertical Rod



FEATURES & OPTIONS

Door Height

For all doors up to 7'0", 8'0" or 10'0" high

Door Width

For all doors up to 36" or 48" wide

Stile

5-3/8" minimum for single doors and standard 5/8" stop
4-7/8" minimum for double doors

Material

Cover: Stainless steel, zinc
Cover Tube: Aluminum
End Cap: Zinc

Dogging

1/4" turn, hex key dogging (non-fire rated only, E9000)

Strike (Top & Bottom)

Stainless steel with plated rollers

Top Latch

1/2" throw, Pullman type with automatic dead-latching,
Stainless steel

Bottom Latch

1/2" throw, Pullman type, held retracted during door swing,
Stainless steel

Mounting

Furnished standard with wood, machine screws and thru-bolts

Backset

2-3/4" standard

Handing

Non-handed

Projection

3" maximum projection, 2-5/8" when depressed

Operation

Exit by slight pressure on any point on the push bar at all time

Electric Latch Retraction

Available with Electric Latch Retraction (ELR)

SPECIFICATIONS

Exit Device: Exit device shall be by **Pamex** model # **E9000V** for standard exit opening. All exit devices shall be modern push pad type with vertical latching, non-handed. Hex-key dogging shall be provided only on non-fire rated exit device. Exit device shall be narrow profile; projecting only 3" from the surface of the door.

WARRANTY


- Life-Time mechanical warranty
- Five years finish warranty



CODE COMPLIANCE

- ANSI A156.3, Grade 1
- UL listed for Panic and UL10C, UBC 7-2-1997 codes

AVAILABLE TRIMS

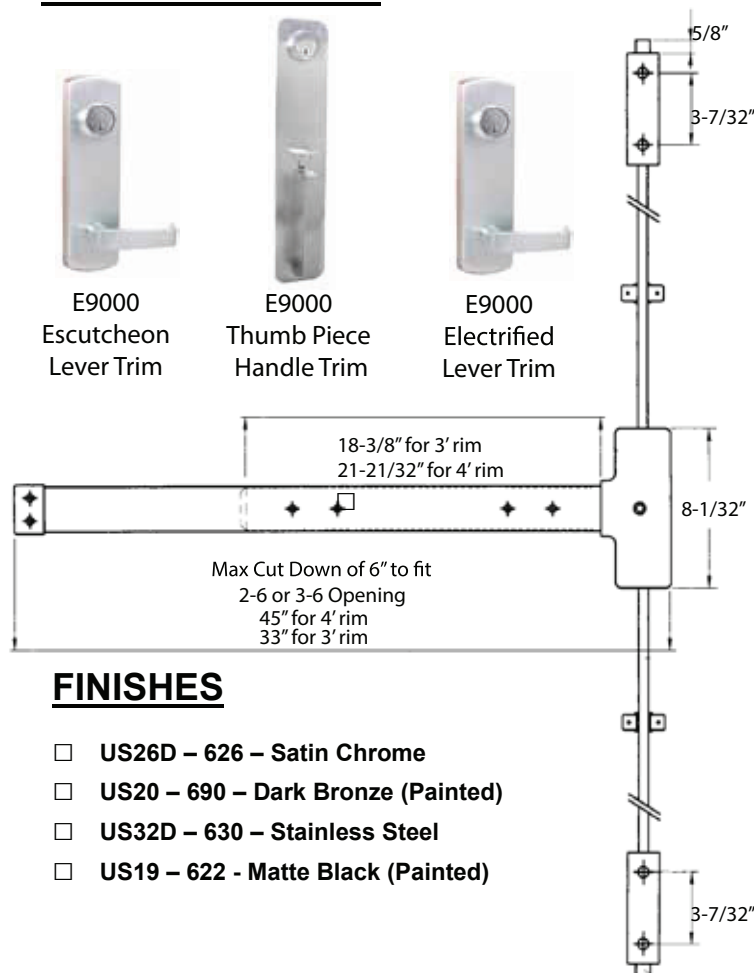

FINISHES

- ☐ US26D – 626 – Satin Chrome
- ☐ US20 – 690 – Dark Bronze (Painted)
- ☐ US32D – 630 – Stainless Steel
- ☐ US19 – 622 - Matte Black (Painted)

EF9000V

Vertical Rod

FEATURES & OPTIONS

Door Height

For all doors up to 7'0", 8'0" or 10'0" high

Door Width

For all doors up to 36" or 48" wide

Stile

5-3/8" minimum for single doors and standard 5/8" stop
4-7/8" minimum for double doors

Material

Cover: Stainless steel, zinc
Cover Tube: Aluminum
End Cap: Zinc

Dogging

No dogging on fire rated devices

Strike (Top & Bottom)

Solid stainless steel

Top Latch

1/2" throw, Pullman type with automatic dead-latching,
Stainless steel

Bottom Latch

1/2" throw, Pullman type, held retracted during door swing,
Stainless steel

Mounting

Furnished standard with wood, machine screws and thru-bolts

Backset

2-3/4" standard

Handing

Non-handed

Projection

3" maximum projection, 2-5/8" when depressed

Operation

Exit by slight pressure on any point on the push bar at all time

Electric Latch Retraction

Available with Electric Latch Retraction (ELR)

SPECIFICATIONS

Exit Device: Exit device shall be by **Pamex** model # **EF9000V** for standard exit opening. All exit devices shall be modern push pad type with vertical latching, non-handed and provided with thru bolts for proper installation. EF9000V is UL listed for 3 hour fire and egress. Exit device shall be narrow profile; projecting only 3" from the surface of the door.



WARRANTY


- Life-Time mechanical warranty
- Five years finish warranty



CODE COMPLIANCE

- ANSI A156.3, Grade 1
- UL listed for Panic and UL10C, UBC 7-2-1997 codes
- UL 3 Hours Fire Rated

AVAILABLE TRIMS

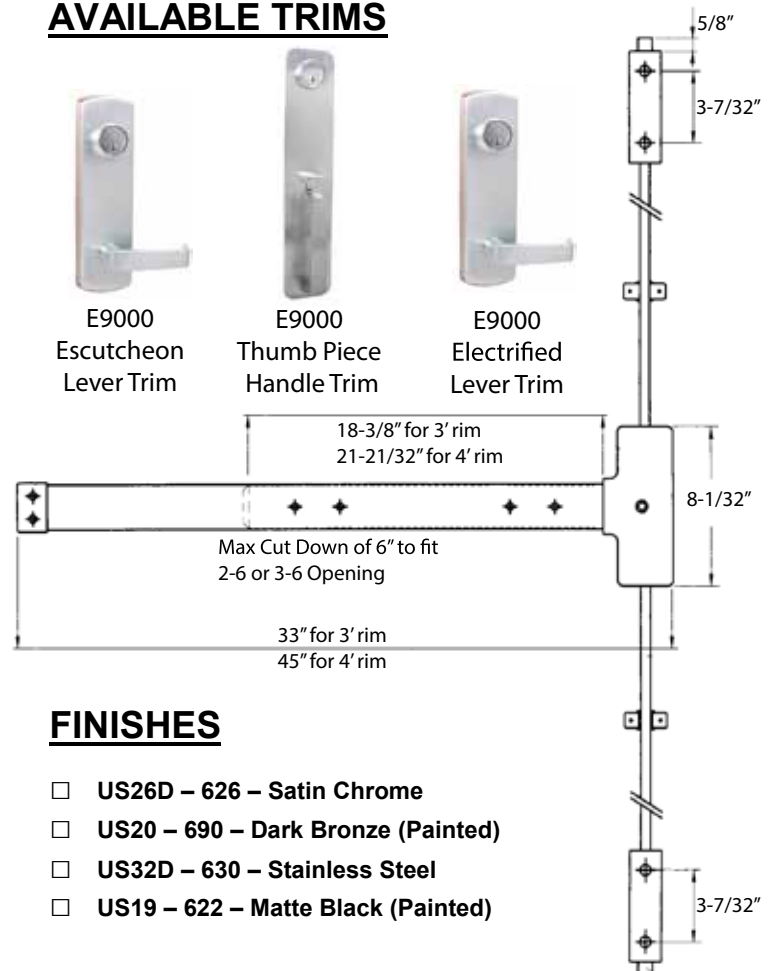

FINISHES

- ☐ US26D – 626 – Satin Chrome
- ☐ US20 – 690 – Dark Bronze (Painted)
- ☐ US32D – 630 – Stainless Steel
- ☐ US19 – 622 – Matte Black (Painted)