

E900E

Rim Type w/ ELR

FEATURES

Voltage

24VDC @ 700 mA activation, 200 mA continuous

Door Width

For all doors up to 36" or 48" wide

Stile

5-3/8" minimum for single doors and standard 5/8" stop
4-7/8" minimum for double doors

Material

Cover: Stainless steel, zinc
Cover Tube: Aluminum
End Cap: Zinc

Dogging

1/4" turn, hex key dogging (non-fire rated only, E9000)

Strike

Stainless steel with plated rollers

Latch Bolts

3/4" throw, Pullman type with automatic dead-latching,
Stainless steel

Mounting

Furnished standard with wood, machine screws and thru-bolts

Backset

2-3/4" standard

Handing

Non-handed

Projection

3" maximum projection, 2-5/8" when depressed

Operation

Momentary or maintained latch bolt and push pad retraction, with simultaneous dogging. Automatic re-triggering of latch retraction.

OPTIONS

- ☐ REX – Request to Exit
- ☐ LBM – Latch Bolt Monitoring
- ☐ REXLBM – Request to Exit + Latch Bolt Monitoring

FINISHES

- ☐ US28 – 689 – Aluminum (Painted)
- ☐ US20 – 690 – Dark Bronze (Painted)
- ☐ US32D – 630 – Stainless Steel
- ☐ US19 – 622 - Matte Black



WARRANTY

- Life-Time mechanical warranty
- One year electrical warranty
- Five years finish warranty



CODE COMPLIANCE

- ANSI A156.3, Grade 1
- UL listed for Panic and UL10C, UBC 7-2-1997 code

AVAILABLE TRIMS




E9000
Escutcheon
Lever Trim



E9000
Thumb Piece
Handle Trim



E9000
Electrified
Lever Trim

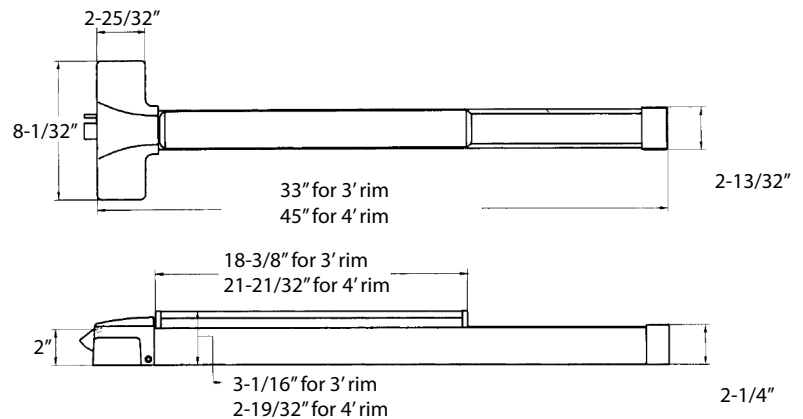

SPECIFICATIONS

Exit Device: Exit device shall be by Pamex model # E9000 for standard exit opening. All exit devices shall be modern push pad type, non-handed. Hex-key dogging shall be provided only on non-fire rated exit device. Exit device shall be narrow profile; projecting only 3" from the surface of the door.

EF900E

Rim Type w/ ELR

FEATURES & OPTIONS

Voltage

24VDC @ 700 mA activation, 200 mA continuous

Door Width

For all doors up to 36" or 48" wide

Stile

5-3/8" minimum for single doors and standard 5/8" stop
4-7/8" minimum for double doors

Material

Cover: Stainless steel, zinc
Cover Tube: Aluminum
End Cap: Zinc

Dogging

No dogging on fire rated devices

Strike

Solid stainless steel

Latch Bolts

3/4" throw stainless steel, Pullman type with automatic dead-latching

Mounting

Furnished standard with wood, machine screws and thru-bolts

Backset

2-3/4" standard

Handing

Non-handed

Projection

3" maximum projection, 2-5/8" when depressed

Operation

Momentary or maintained latch bolt and push pad retraction, with simultaneous dogging. Automatic re-triggering of latch retraction.

OPTIONS

- ☐ REX – Request to Exit
- ☐ LBM – Latch Bolt Monitoring
- ☐ REXLBM – Request to Exit + Latch Bolt Monitoring

FINISHES

- ☐ US28 – 689 – Aluminum (Painted)
- ☐ US20 – 690 – Dark Bronze (Painted)
- ☐ US19 – 622 – Matte Black



WARRANTY

- Ten years mechanical warranty
- One year electrical warranty
- Five years finish warranty



CODE COMPLIANCE

- ANSI A156.3, Grade 1
- UL listed for Panic and UL10C, UBC 7-2-1997 code
- UL 3 Hours Fire Rated

AVAILABLE TRIMS




E9000
Escutcheon
Lever Trim



E9000
Thumb Piece
Handle Trim



E9000
Electrified
Lever Trim

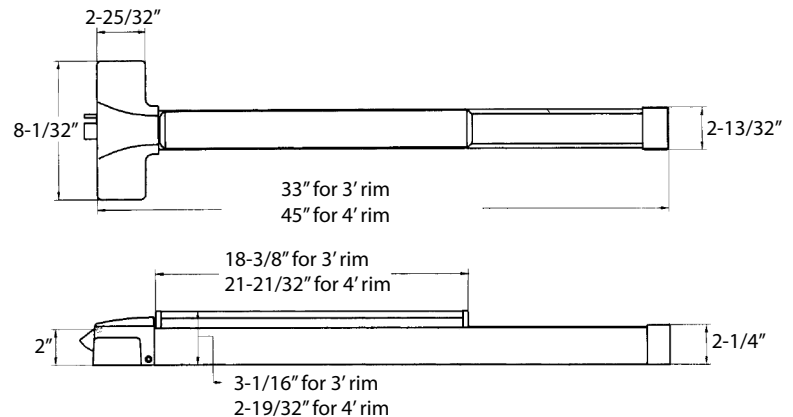

SPECIFICATIONS

Exit Device: Exit device shall be by **Pamex** model # **EF9000** for UL fire barrier doors. All exit devices shall be modern push pad type, non-handed and provided with thru bolts for proper installation. EF9000 is UL listed for 3 hour fire and egress. Exit device shall be narrow profile; projecting only 3" from the surface of the door.