

# Architectural Door Accessories

**ASSA ABLOY**

## Pemko Commercial Threshold


The global leader in  
door opening solutions

Applies to the following products:

**252X226\_T, 254X226\_T, 255X226\_T, 252X226\_FGT,  
253X226\_FGT, 254X226\_FGT, 255X226\_FGT**

### Installation Instructions:

1. Carefully cope to fit within the frame opening making sure seal will make contact with door face.
2. Trim seal 1/16" longer than threshold at each end. Use a sealant or compound at all edges and joints.
3. Fasten with screws provided.

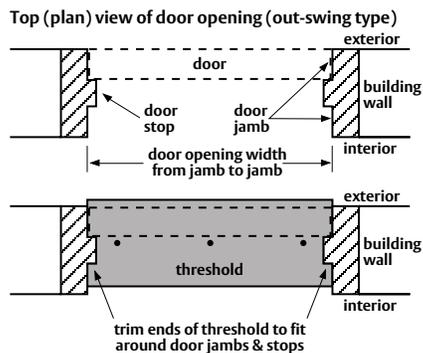

### Tools Required:



### Testing/Ratings:



[www.pemko.com](http://www.pemko.com)

MEMPHIS, TN USA P: 800 824-3018 F: 800 243-3656  
VENTURA, CA USA P: 800 283-9988 F: 800 283-4050  
VANCOUVER, BC CA P: 877 535-7888 F: 877 535-7444  
TORONTO, ON CA P: 877 535-7888 F: 877 535-7444

Copyright © 2017 Pemko Manufacturing Co., an ASSA ABLOY Group company. All rights reserved.  
Reproduction in whole or in part without the express written permission of Pemko Manufacturing Company is prohibited.

CT18\_WEBINS  
Rev 2 - 01.26.17  
Page 1 of 1