

CENTER HUNG, DOUBLE ACTING FLOOR CLOSERS

MODEL 30

Application

- Double Acting, Non-handed
- Interior or Exterior[^] Doors
- Weight to 200 lbs.
- Sizes up to 4'0" x 8'6"* (1219 x 2591mm)

Product Description & Features

- 340 top pivot included
- Available non-hold open (N) or automatic hold open (A) at 90° (requires 93° swing) or 100° (requires 103° swing)
- Maximum door opening 103°
- Centering arm with adjustment screws in faces of door (critical for double acting doors)
- Adjustable closing speed valves for each direction of door swing
- Mechanism returns door to center
- Auxiliary door stop required, overhead or floor type
- Available with floor plate or threshold installation (floor plate shown)
- Steel cement case
- Not available in Delayed Action (DA)
- Not allowed for fire rated doors
- Furnished with wood and machine screws

Optional Features

- Cold weather fluid option – specify "CWF"
- Sealed closer option – specify "SC"
- Arm reinforcement bracket for wood doors – prefix "W"
- Extended spindles available in 1/2" increments up to 2" longer than standard

Compliance


- ANSI/C06012

* For doors taller than 8'6" use top pivot 345 in lieu of 340

[^]Primary means of egress should not use double-acting closers



Technical Information

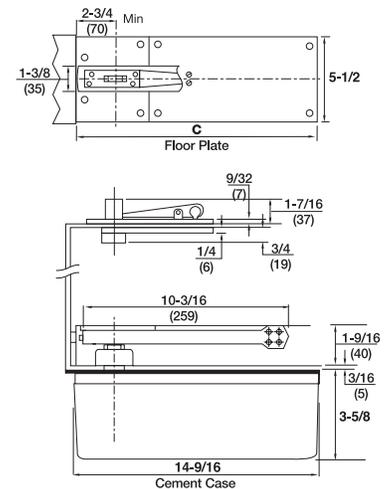

Pivot edge of door must be radiused.