

Model FA19

Application

- Full Mortise
- Behavioral Health or High Security Applications
- Handed

Product Description & Features


- Optional intermediate pivot for institutional use or installations where flat surfaces are objectionable
- Maintains door alignment
- Aids in installing bottom pivots
- 3/4" (19mm) offset
- Door edges must be beveled in 1/8" in 2"
- Ferrous base material
- Doors 60" (1524mm) to 90" (2286mm) in height should use one intermediate pivot. Each additional 30" (762mm) warrants another intermediate pivot
- Furnished with wood and machine Torx® screws

Compliance

- May be used with fire door assemblies
- ANSI/C07361



Technical Information



Model M19

Application

- Full Mortise
- Handed

Product Description & Features

- Not load-bearing
- Maintains door alignment
- Aids in installing floor closers and bottom pivots
- 3/4" (19mm) offset
- Door edges must be beveled in 1/8" in 2"
- Non-ferrous base metal
- Doors 60" (1524mm) to 90" (2286mm) in height should use one intermediate pivot. Each additional 30" (762mm) warrants another intermediate pivot
- Furnished with wood and machine screws

Optional Features


- Available for 1-1/2" (38mm) offset

Compliance

- Available for fire door assemblies (ferrous material) - specify FM19
- For 20-minute label suffix "-20" to the part number
- ANSI/C07321/C07371



Technical Information

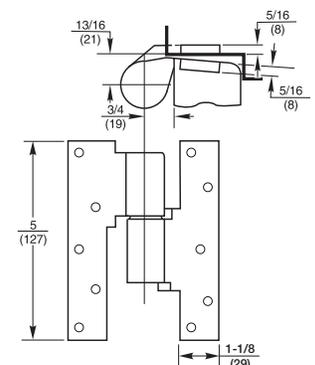

RIXSON®
ASSA ABLOY

ASSA ABLOY, the global leader
in door opening solutions