


Rockwood 585-24

24" Surface Bolt

ROCKWOOD®

ASSA ABLOY

Experience a safer
and more open world

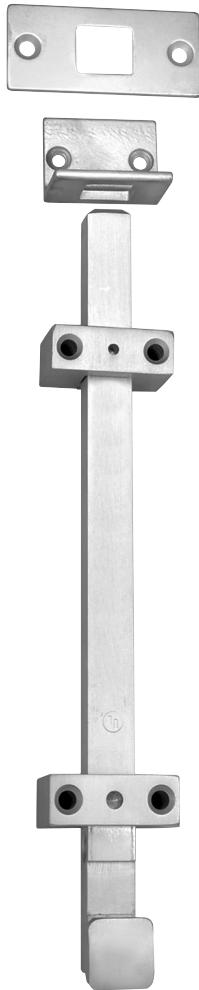

⚠️ WARNING

This product can expose you to lead which is known to the state of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65warnings.ca.gov.

SPECIFICATIONS:

MATERIAL:

Steel

FASTENERS:

Bolt: 4 ea. $1/4"$ -20 x $2\frac{1}{4}"$ Flat Head Machine Screws; 4 ea. $1/4"$ -20 x $1\frac{5}{8}"$ Sex Bolts

Strikes: 2 ea. #14 x $2\frac{1}{2}"$ Flat Head Sheet Metal Screws, 2 ea. Plastic Anchors;

2 ea. $1/4"$ -20 x 1" Flat Head Machine Screws, 2 ea. $1/4"$ -20 Anchors

FEATURES:

- UL listed for use on inactive leaf of a pair of 3-hour labeled fire doors
- Includes a universal top strike and a mortise bottom strike
- Locks in both the up and down position
- Bolt locks automatically when thrown; can be released only by pressing knob toward door while retracting
- Can be used on any type of door
- Accommodates padlock

AVAILABLE FINISHES:

- 10BE
- US26D/626
- BSP (Black Suede Powder Coat)
- BPC (Black Powder Coat)
- FBPC (Flat Black Powder Coat)
- WSP (White Suede Powder Coat)
- WPC (White Powder Coat)
- Stock Powder Coats

Size:

Bolt Throw: $1\frac{1}{4}"$

Bolt Material: $\frac{3}{4}"$ x $\frac{3}{4}"$

Bolt Length: 24"

Weight: 6.1 lbs.

ANSI A156.16: L04161

Rockwood Manufacturing Company

300 Main St.

Rockwood, PA 15557

www.rockwoodmfg.com

1800 458 2424