

Securiguard™

The lock for the cylinder

Resists vandalism, bumping & unauthorized key use



- Bump-proof, concealed cylinder
- Non-duplicable magnetic key access
- Simple, user-friendly operation
- Fast & easy installation

THE LOCK FOR THE CYLINDER

Securiguard™

Resists vandalism, bumping & unauthorized key use



ASSA ABLOY

Designed to fit over removable core or standard cylinders

What is "Bumping"?

Burglars take a regular key and mill it down, creating a "bump key". It is inserted into the lock and with a tap of a hammer on the "bump key" the lock opens. It's so easy an eight-year-old can do it!


The technique has been around for over 40 years and is spreading like wildfire thanks to the internet.

Securiguard™ protects against

- Bumping
- Unauthorized key use
- Vandalism
- Picking
- Wrenching
- Krazy Glue

Securiguard™ offers

- Bump key protection
- Simple access control
- 100% cylinder concealment
- Prevention of cylinder icing
- Easy installation
- Special magnetic keys that cannot be duplicated
- Ease of use



Model #6300

Size

Height	5 ¼"
Width	2"
Depth	1 ⅝"

Finish Clear aluminum

Furnished with two magnetic keys

Securiguard™ stops Krazy Glue & bump keys


Securiguard™ has a sliding shield that covers the cylinder. Prevents vandalism by ensuring that Krazy Glue and bump keys cannot be used.


The shield is raised and lowered via a special magnetic key.

When the shield is up, the key can be used. When the shield is down, the cylinder is 100% concealed.

Securiguard™ key info

There are millions of Securiguard™ key combinations. Additional keys can be ordered and Securiguard™ can be ordered to work with the same magnetic key. Regular magnets cannot open the Securiguard™.

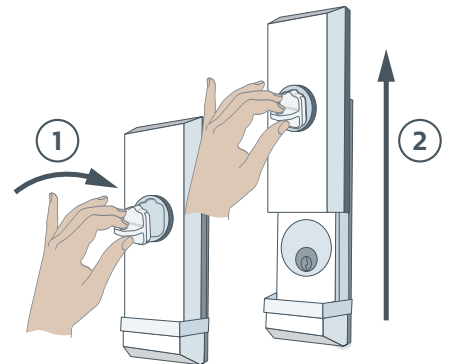

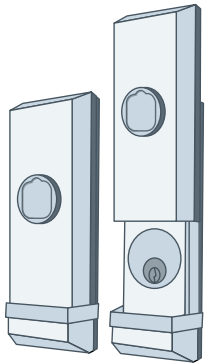**APPLICATIONS**

- Areas where cylinders are prone to vandalism
- Areas where cylinders are prone to weather issues
- Doors where dual verification for entry is needed
- Doors needing restricted access

Operation

The Securiguard™ shield is raised by the magnetic key. The lock key may then be inserted and used.

The shield will remain open until lowered by use of the magnetic key.

Key lock-out function

This function is used to lock-out keys and restrict access to the cylinder, in addition to cylinder protection.

Typically, a manager will raise the shield at the start of the day. Regular keys can then be used to operate the lock. At the end of the day, the manager uses the magnetic key to lower the shield.

Key combinations

Securiguard™ is available keyed different or keyed alike to a new or existing combination.

Available finishes

JB = Jet black finish.

AL = Aluminum finish (clear)

Additional keys

Securiguard™ keys can be ordered from the factory to match code numbers.

Keys are stamped with code numbers. Codes may be registered to prevent ordering by unauthorized individuals.

Note: Special cylinder caps

Some cylinders use special caps over the face of the cylinder for different finishes. Certain caps add too much to the diameter of the cylinder and need to be removed prior to insertion in the Securiguard™. This does not affect the cylinder operation.

**Models**

S6300	Use over standard or high-security cylinders. Furnished with 2 magnetic keys.
S6302	For use with <i>Schlage</i> deadbolts. Includes modified filler plate & collar.
S6305	Combination of 6300 & BAP. For use with <i>Best</i> or other raised face removable core cylinders.
S6310	Identical To 6300, furnished with 3 magnetic keys per Securiguard™.
S6315	Identical to 6305, furnished with 3 magnetic keys per Securiguard™.
S63PP	Securiguard™ is mounted on a stainless steel pull plate for use with exit device. Contact factory with specific exit device name and model number for custom model.
S63MP	Securiguard™ is mounted on a stainless steel plate for use with exit device or other lock. Contact factory with specific exit device name and model number for custom model.
S64	Change 63 to 64 for a Securiguard™ with removable bay.

Popular Models

S6300-AL	Standard unit with two keys; aluminum
S6300-JB	Standard unit with two keys; jet black
S6305-AL	Standard unit with adapter plate for use with <i>Best</i> or other raised face removable core cylinders; aluminum
S6305-JB	Standard unit with adapter plate for use with <i>Best</i> or other raised face removable core cylinders; jet black

Parts & Options

S63BAP	Adapter plate (spacer) for use with raised face I/C cylinders
S63KEY	Additional key
S63BAY	Replacement locking bay with 2 keys

Finish

AL	Aluminum
JB	Jet black



The ASSA ABLOY Group is the global leader in access solutions. Every day, we help billions of people experience a more open world.

ASSA ABLOY Opening Solutions leads the development within door openings and products for access solutions in homes, businesses and institutions. Our offering includes doors, frames, door and window hardware, mechanical and smart locks, access control and service.

CONTACT

54-60 46th Street
Maspeth, NY 11378
800-622-LOCK
Local: 718-392-9000
Fax: 718-392-8944
www.Securitech.com