


## Flat plate astragal

### Exposed fastening

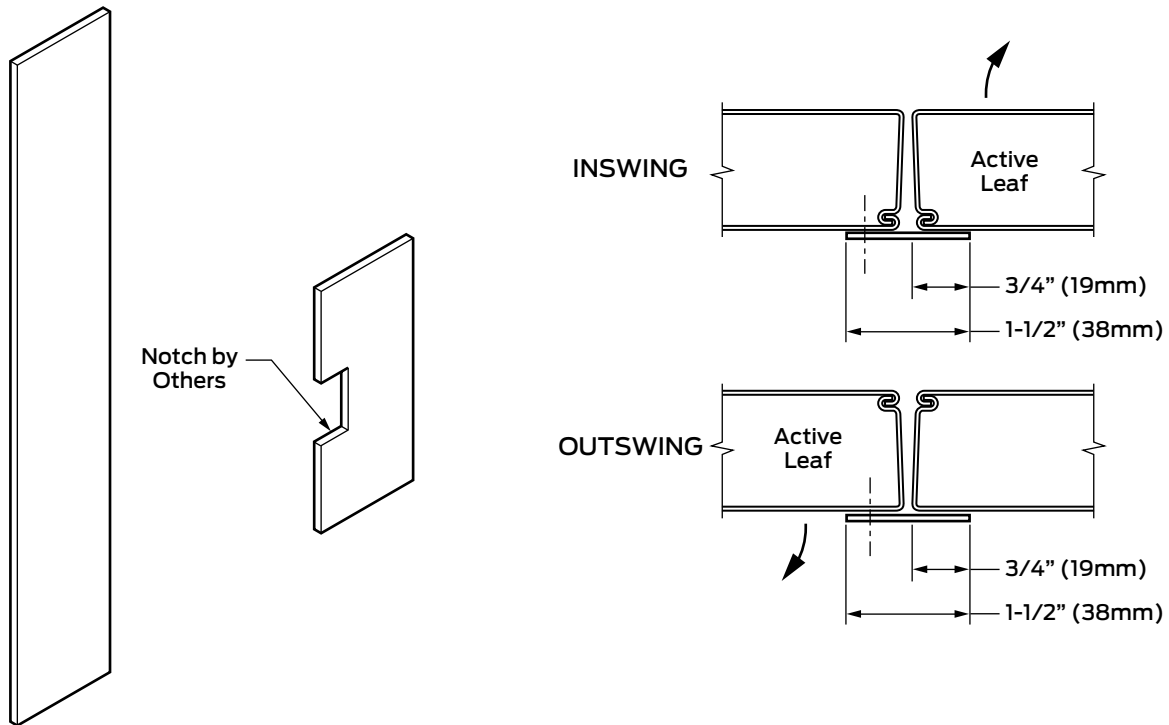

### Purpose

Astragals are used to close the gap between pairs of doors. The astragal seals the opening from weather, light, and in some cases, sound. Security requirements dictate the appropriate application.

### Application

- Attached to the outside of the active leaf on swing-out doors
- Attached to the outside of the inactive leaf on swing-in doors
- The astragal is a 14 gauge (1.7 mm) steel part; attached by using screws or by welding to the proper door leaf
- For this type of astragal, a wide inactive leaf is recommended
- When a conventional lock and strike are used, notching for the strike lip is performed in the field by others
- See Hardware Preparations section for strike, lock front and flush bolt preparation

### Product availability

This product option is available for Steelcraft L, SL, B, T, CE, and A14 Series doors. See the Fire Rated Products Section for application to Fire Rated doors.