




---

# TH-BTH5A

## BUMPER SEAL THRESHOLD WITH VINYL INSERT

1/2" H x 5" W

FINISH: MILL FINISH ALUMINUM

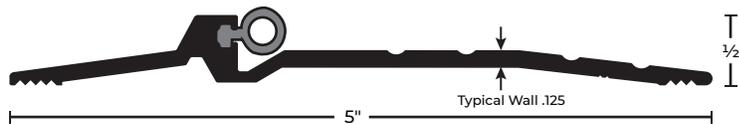

---

### INSTALLATION INSTRUCTIONS

Measure width at the bottom of the frame and cut the threshold to exact full width of the opening.

If desired, trim and notch the threshold ends to accommodate the side jamb stops.

Mark and drill pilot holes through the pre-drilled holes in the threshold and fasten with screws provided.

Caulk both ends and along the sides of the threshold for moisture control.



ADA Compliant



Meets UL10B, UL10C



Fire-Rated

---

MATERIAL FOR USE IN LISTED STEEL FRAMES AND CLASSIFIED HOLLOW METAL STEEL COMPOSITE TYPE FIRE DOORS ARE RATED UP TO AND INCLUDING 3 HOURS, WOOD COMPOSITE TYPE FIRE DOORS ARE RATED UP TO AND INCLUDING 1-1/2 HOURS, AND WOOD CORE FIRE DOORS ARE RATED 20 MINUTES WITHOUT HOSE STREAM.