
TRUDOOR™

TD-HSTH5

Commercial Half Saddle Threshold



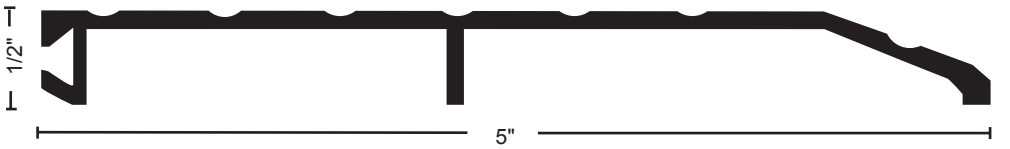

Specifications

- Designed for thermal break - no bumper seal available
- Meets ANSI/BHMA A156.21 standards - 1,000 Lb. Load Test
- Fluted top
- Made from thick, durable aluminum alloy
- Supplied with zinc plated screws
- Width: 5″
- Height: 1/2″
- Mill finish aluminum

Code compliance

- UL listed, Fire Rated – UL to CAN/ULC-S104 and ANSI/UL10B
- ADA Compliant When Installed with the Non-Beveled Edge Flush with Flooring, or Where No Greater Than 1/4″ Vertical Rise Occurs

Copyright © 2026 Trudoor LLC, Trudoor - Doors & Hardware, and TRUDOOR® All Rights Reserved.