TRUDOOR™

KD HOLLOW METAL DRYWALL FRAME

Steel door frame for interior commercial, industrial and institutional applications

A KD or Knocked Down hollow metal drywall frame (slip-on frame) is used for interior applications and comes in 3 pieces (strike jamb, hinge jamb and head). The KD drywall door frame is designed to be installed after the stud wall has been built and drywall applied, as it wraps the wall. Trudoor is authorized by Warnock Hersey / Intertek to modify, re-certify and label fire-rated metal door frames.



Features:


- Heavy duty; 16-gauge cold rolled steel
- Standard jamb depths of 4-3/4" to 8-1/4"
- 2" jamb and head faces, 5/8" stop height, 1/2" double return
- Unequal double rabbets standard
- Exact fit die-mitered corner connections
- Screw adjusting compression anchors and dimpled base anchor holes on jambs
- 7-Gauge hinge reinforcements, optional 14-gauge door closer reinforcement
- 4-7/8" Universal ASA strike preparation (blank strike jambs available)
- Factory applied rust inhibiting primer (no special color options)
- Fire-rated up to 90 minutes with WHI / ITS mylar label applied
- Steelcraft hardware locations standard (Ceco, Curries, and custom locations available)

Code Compliance:


- Meets the requirements of ANSI A250.8-2014 (SDI 100)
- Optional – WHI / ITS up to 90-minute fire-rating
- Made in the USA - Meets Buy American Act

BAA Compliant


Intertek

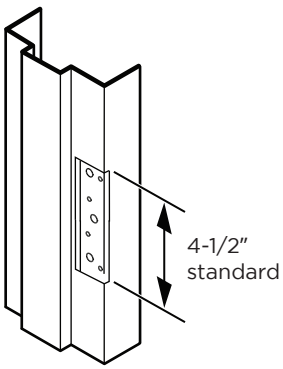


Mortise Hinge Prep

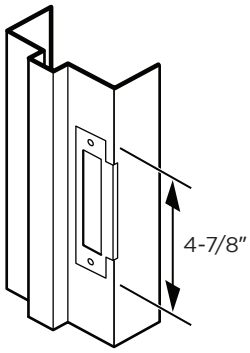

ASA Strike Prep

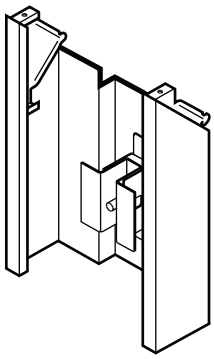

Compression Anchor
(compresses against stud)



Base Anchor Holes
(attaches to wall sill runner)

Manufacturers include Steelcraft and ASSA Abloy