


# 2000 Series *Standard Duty Rim Exit Device*



## Specifications

- ANSI:** Meets ANSI A156.3 - Grade 1 Standards  
**UL Listings:** UL Listed for Panic Exit Hardware  
UL Listed for "A" Label 3 Hour Fire Doors  
**ADA:** Meets ADA requirements ANSI A117.1 with Lever Trim

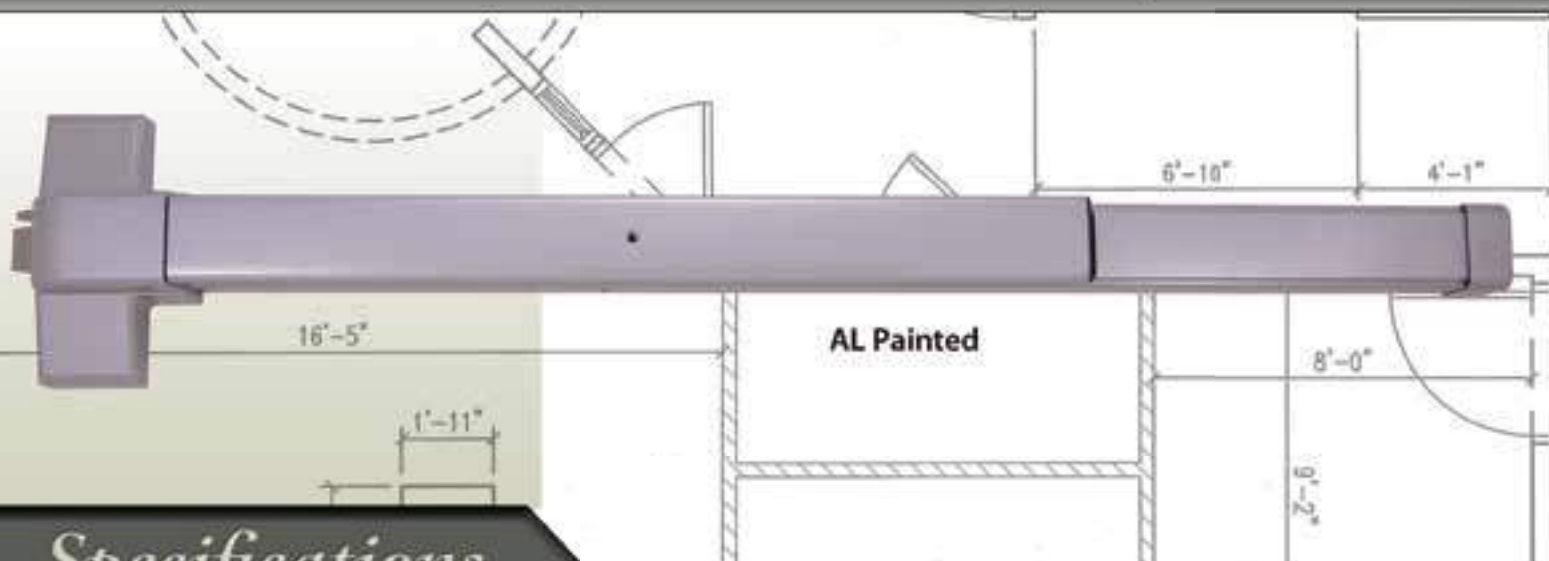

**Handing:** Non Handed - Completely Reversible

**Construction:** Roll Formed Steel or Stainless Steel Channel & Steel Chassis  
Steel or Stainless Steel Headcover & End Cap

**Finishes:** Aluminum, Dark Bronze, Gold Painted & US32D

**Latchbolt:** Deadlocking latchbolt with 5/8" projection

**Strike:** Roller Strike with 5/8" projection with 1/8" shim

**Dogging:** 5/32" Hex Key Dogging Standard on Panic Exit Hardware

**Device Lengths:** 33" for 3'-0" wide doors and 42" for 3'-8" to 4'-0" wide doors

**Min. Door Width:** 33" & 42" devices can be cut down to fit on 2-4" wide doors

**Center Case Dim.:** 6" Height x 2 5/16" Wide x 2 1/2" Thick - 4" Minimum stile required

**Mechanism Case Dim.:** 1 5/8" Height x 1 13/16" Wide

**Projection:** 2 1/2" Undogged - Push bar Neutral & 1 13/16" Dogged - Push bar Depressed

**Fasteners:** Wood, Machine & Self Tapping Machine Screws (F2000R includes thru bolts)

**Alarmed Exits:** Exit Alarm Kit ALK-2000 available for new or existing devices

**Trim & Accessories:** ASA & latch filler included, Exterior Trims, Shim Kits other accessories available

**Warranty:** Limited Lifetime Warranty



US32D



Gold Painted



BZ Painted



211 Endeavor Drive - PO Box 680  
Rogersville, MO 65742  
PH 877-258-1262 FX 877-888-0150  
www.designhardware.net