


# 2000 Series *Standard Duty SVR Exit Device*

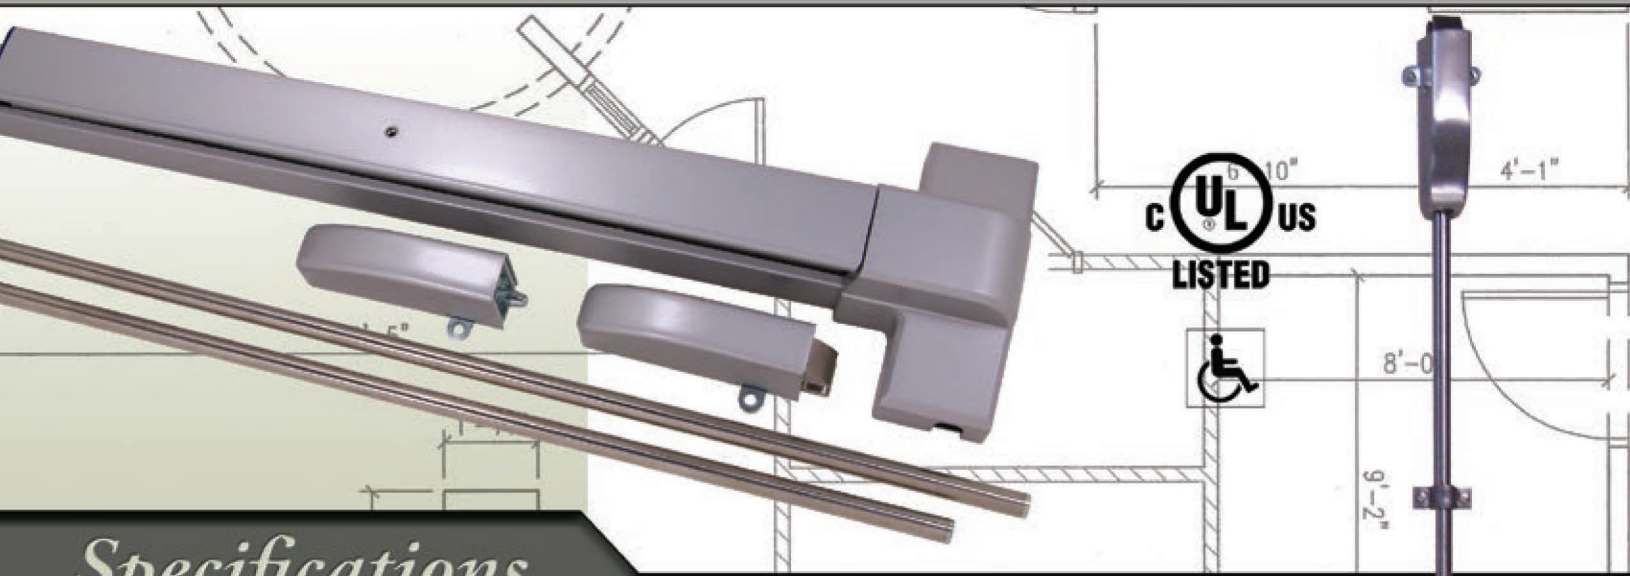

## *Specifications*

- ANSI :** Meets & Exceeds ANSI A156.3 - Grade 1 Standards
- UL Listings :** UL Listed for Panic Exit Hardware  
3 Hour Fire Doors to 8'-0" x 10'-0" & LBR up to 8'-0" x 8'-0"
- ADA :** Meets ADA requirements ANSI A117.1 with Lever Trim
- Handing :** Easily Re-handed in the field - Shipped as RHR
- Construction :** Roll Formed Steel or Stainless Steel Channel & Steel Chassis  
Steel or Stainless Steel Head Cover & End Cap
- Finishes :** Aluminum, Dark Bronze, Gold Painted & US32D
- Top Latch :** U Shaped Top Latch for Secure Engagement with strike
- Bottom Latch :** Drop Bolt Style Bottom Latch Secures into flat strike & hole in the floor
- Dogging :** 5/32" Hex Key Dogging Standard on Panic Exit Hardware
- Device Lengths :** 33" for 3'-0" wide doors and 42" for 3'-8" to 4'-0" wide doors
- Min. Door Width :** 33" & 42" devices can be cut down to fit on minimum door width of 2'-4"
- Door Heights :** 7'-0" Standard - Extended Top Rods available for up to 10'-0" tall doors
- Center Case Dim. :** 6" Height x 2 5/16" Wide x 2 1/2" Thick - 4" Minimum stile required
- Mechanism Case Dim. :** 1 5/8" Height x 1 13/16" Wide
- Projection :** 2 1/2" Undogged - Pushbar Neutral & 1 13/16" Dogged - Pushbar Depressed
- Fasteners :** Wood, Machine & Self Tapping Machine Screws (F2000V includes thru bolts)
- Trim & Accessories :** Latch filler included, Exterior Trims, Shim Kits other accessories available
- Under Cut :** 1/4" door under cut recommended for 1/4" threshold or no threshold openings
- Warranty :** Limited Lifetime Warranty