



TH5

5" Saddle Threshold

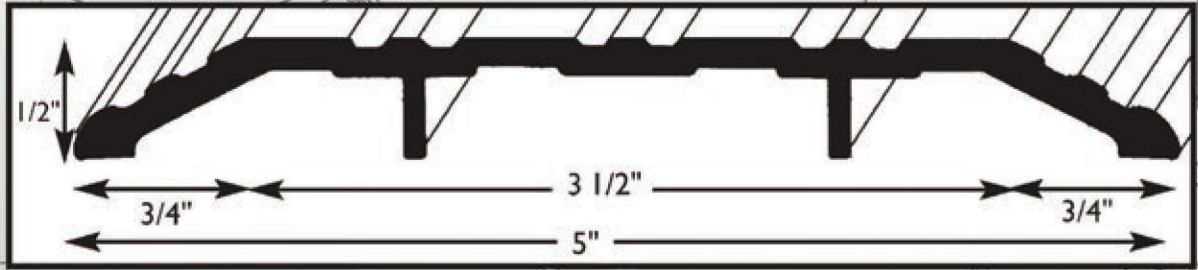

Specifications

Material : 6063-T5 Extruded Aluminum Alloy

UL Ratings : Classified by UL and intended for application to hollow metal fire doors rated up to and including 3 hours, and wood doors rated up to 1 1/2" hours

UL Positive Pressure : Fire Rated & Tested to meet UL10B & UL10C, UBC7-2, Part 1 & BS476
Smoke Tested & Listed to meet the requirements of Standards
UL 1784 UBC7-2, Part II and BS476

ADA : Meets ANSI A117.1 accessibility codes

Width : 5"

Height : 1/2"

Stock Lengths : Stocked as 36", 48" (cut 1/2" over) & 72" & 96" (cut 1" over)

Non Stock Lengths : Special order: 32" (cut 1/2" over)
Special order: 60" 64", 84" (cut 1" over)

Stock Finishes : MF = Mill finish (stock)
BZ = Bronze anodized (stock)

Fasteners : #10 Phillips wood screws provided

Warranty : Limited 3 Year