


V2 REV A SLIMLINE™ VISION KITS FOR 3/16-1/4" GLASS: VSL, SLR, VWL

Low Profile Beveled Vision Lite For Fire Rated Doors. Self-Attaching for Glass 3/16" to 1/4"
Frame Has Single-side Fasteners. Available in Round Shapes or Wood Veneer

SPECIFICATIONS:

Material:	20 gauge CRS frame. Min Size 3" x 3", Max 60" x 104". See Fire Rating Below.
Construction:	1-1/4" trim with radius corners, mitered and welded. Continuous glass retainer, countersunk mounting holes in the bevel on non-corridor side.
Door:	For 1-3/4" door. For other sizes, see models VLFIG and VLFEZIG. Door cutout = order size.
Fasteners:	#8 x 1" flathead phillips SMS to match finish. <u>Woodlite</u> has wood veneer plugs covering screw heads.
Powder Coat Finishes:	___ (B) Mineral Bronze ___ (G) Gray (stock colors for VSL) ___ (BK) Black ___ (FBK) Flat Black ___ (W) White ___ (SB) SC Beige ___ (SI) Silver ___ (R) Red ___ (S) Sand ___ (AB) AMS Beige ___ (GH) Gray Hammertone View Color Samples Online
Glass:	3/16" - 1/4" glazing to be ordered separately from Glazing Section of catalog. Use fire rated glazing with Warnock Hersey (WHI) or UL classification markings for fire rated applications. Visible light is 2" under rough opening size. <u>Glass size is 1" under order size.</u> Fire-Rated Air Louvers Glazing to fit this Product: WS, KFRF, PYRO, and PPF.
Fire-Rating, Testing & Listings:	When installed in properly rated and approved door, ratings up to 3 hours can be achieved for VSL and SLR, depending on the glazing used. See glazing ratings for max exposed area. Tested and Listed for UL 10C and Criteria of UBC 7-2 Positive Pressure. See detailed installation instructions.

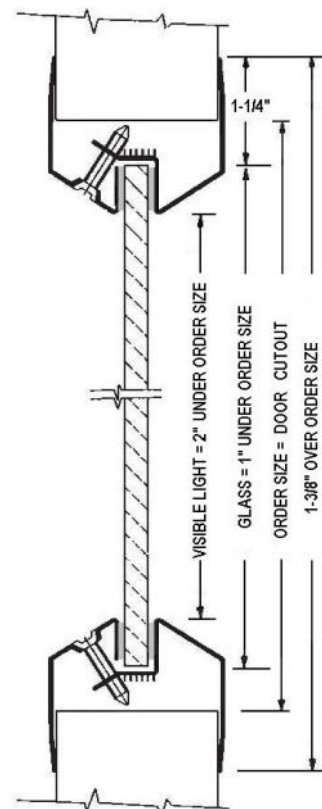

OPTIONS AT ADDITIONAL COST:



PAK:	Includes Vision Lite, Glass Sized to Fit, Applied Glazing tape for UL10B Installations, Securely Packaged Individually. See First Page in Vision Lite Catalog to order.
UBC 7-2 Installation:	___ Additional intumescent tape for Positive Pressure UL10C . See detailed installation instructions. NOTE: Intumescent tape NOT needed for 20 Minute Wood doors for UL Label.
Finishes & Materials:	___ (S) 20 Gauge Stainless Steel: #4 Finish. ___ (G) Galvanized Sheet for Exterior Applications. ___ (E) Electro Zinc Plating for Maximum Corrosion Resistance.
Woodlite Wood Veneers:	___ VWL .010 Wood Veneer to Match Wood Finish. (excludes SLR) Rated 90 mins ___ Veneer Type: (WV-07) Maple, (WV-06) White Birch, (WV-05) Red Oak. See website for more wood type codes and photos. Samples available upon request.
Fasteners:	___ Torx ___ Other: _____
Mullions:	Factory welded to vision lite & painted. See Mullions Page in this section to order.
Round Vision Lite:	___ VSLR-12: One piece, 18 gauge construction. 11" glazing. (n/a (S) material) ___ VSLR-18: One piece, 18 gauge construction. 17" glazing. (n/a (S) material)
Privacy Screen:	Add the New Privacy Screen to This Vision Lite— See Web Page for Details
Custom:	Smaller or larger size or other options; Contact Customer Service for special orders.

STOCK ITEM - MANY STANDARD SIZES OF VSL FRAMES IN STOCK FOR NEXT DAY SHIPMENT FROM ALL WAREHOUSES - LINK

Order Format:

VSL, VSLR, VWL Option S,G,EG W H Color

Example: VSL 1212GH

Interpretation of Fire and Building Codes May Vary. Consult with the Local Authority Having Jurisdiction (AHJ) to determine appropriate standards.

<p>© 2017 Activar Construction Products Group, Inc.</p>	Distributor:	Width: ___ x Height: ___
	Architect:	Quantity:
	Contractor:	Model:
	Project:	Date: _____ Version: ALPDS1709
<p>800-554-6077 QUOTES@ACTIVARCPG.COM ORDERS@ACTIVARCPG.COM SALES@ACTIVARCPG.COM Fax: 952-835-2218</p> <p>VISIT WWW.ACTIVARCPG.COM FOR THE MOST UPDATED PRODUCT INFORMATION BEFORE ORDERING</p> <p>MFG: COMMERCE CA, BLOOMINGTON, MN • WAREHOUSES: LANCASTER PA, ATLANTA GA, CHICAGO IL, SEATTLE WA, FORT MYERS FL, DALLAS TX, FARGO ND, OMAHA NE</p>		