




Recommended for Applications Requiring Fire Rated, Safety, and or Insulated Glazing 5/16" to 1 11/16" Thick

**SPECIFICATIONS:**

<b>Material:</b>	20 gauge CRS frame. Min Size 3" x 3", Max 60" x 104". See Fire Rating Below.
<b>Construction:</b>	1-1/4" trim with radius corners, mitered and welded. Continuous glass retainer, countersunk mounting holes on the face of the non-corridor side. Frame projects 3/8".
<b>Door:</b>	<b>UL:</b> 1" - 3" door. Specify door thickness: _____ <b>Door cutout = order size.</b> <b>WHI:</b> 1 3/8" to 2 1/2"
<b>Fasteners:</b>	#8 x 1" flathead phillips SMS to match finish.
<b>Powder Coat Finishes:</b>	____ (B) Mineral Bronze (standard color) ____ (BK) Black ____ (FBK) Flat Black ____ (W) White ____ (SB) SC Beige ____ (SI) Silver ____ (R) Red ____ (S) Sand ____ (G) Gray ____ (AB) AMS Beige ____ (GH) Gray Hammertone <a href="#">View Colors Online</a>
<b>Glass:</b>	_____ " <b>Glass Thickness Will Be Used for this Order</b> <b>UL Listing: 5/16" to 1 11/16", WHI Listing: 5/16" to 1"</b> , glazing to be ordered separately from <b>Glazing Section</b> of catalog. Use fire rated glazing with Warnock Hersey (WHI) or UL classification markings for fire rated applications. Visible light is 2" under rough opening size. <u>Glass is 1" under order size.</u> Must specify glass thickness above. <b>Fire-Rated Air Louvers Glazing to fit this vision frame: KFRL, KFRFU, CONTRA45, CONTRA60, ARMRSHIELD, LGSHIELD.</b> If glazing is being provided by a supplier other than Air Louvers, coordinate with the supplier to ensure compatibility with IG kits.
<b>Fire-Rating, Testing &amp; Listings:</b>	When installed in properly rated and approved door, ratings up to 3 hours can be achieved, depending on the glazing used. See glazing ratings for max exposed area. Tested and Listed for UL 10C and Criteria of UBC 7-2 Positive Pressure.

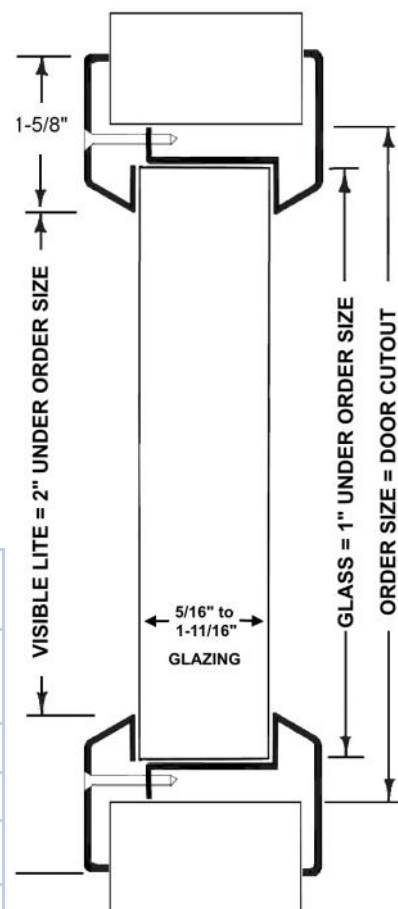

**OPTIONS AT ADDITIONAL COST:**


<b>UBC 7-2 Installation:</b>	____ Additional intumescent tape for <b>Positive Pressure UL10C.</b> See detailed installation instructions.  
<b>Finishes &amp; Materials:</b>	____ (S) 20 Gauge Stainless Steel: #4 Finish. ____ (G) Galvanized Sheet for Exterior Applications. ____ (E) Electro Zinc Plating for Maximum Corrosion Resistance.
<b>Fasteners:</b>	____ Torx ____ Other: _____
<b>Mullions:</b>	Factory welded to vision lite & painted. See Mullions Page in this section to order.
<b>Custom:</b>	PAK, smaller or larger sizes. Leadlined. Contact Customer Service for Special Orders.
<b>Miniblind in Vision Lite:</b>	Blinds are sealed between the two lites of glass. See separate VLFEZIGMB page in this section to view options.

**Order Format: VLFEZIG**

Option S,G,EG W H Color Glass Thickness

**Example: VLFEZIG 1212S 01**

Interpretation of Fire and Building Codes May Vary. Consult with the Local Authority Having Jurisdiction (AHJ) to determine appropriate standards.

 <p>© 2017 Activar Construction Products Group, Inc.</p>	<b>Distributor:</b>	<b>Width:</b> _____ <b>x Height:</b> _____
	<b>Architect:</b>	<b>Quantity:</b> _____ <b>Door Thickness:</b> _____
	<b>Contractor:</b>	<b>Glass Thickness:</b> _____
	<b>Project:</b>	<b>Date:</b> _____ <b>Version:</b> ALPDS1612
<p>800-554-6077 <a href="mailto:QUOTES@ACTIVARCPG.COM">QUOTES@ACTIVARCPG.COM</a> <a href="mailto:ORDERS@ACTIVARCPG.COM">ORDERS@ACTIVARCPG.COM</a> <a href="mailto:SALES@ACTIVARCPG.COM">SALES@ACTIVARCPG.COM</a> FAX: 952-835-2218</p> <p>VISIT <a href="http://WWW.ACTIVARCPG.COM">WWW.ACTIVARCPG.COM</a> FOR THE MOST UPDATED PRODUCT INFORMATION BEFORE ORDERING</p> <p>MFG: COMMERCE CA, BLOOMINGTON, MN • WAREHOUSES: LANCASTER PA, ATLANTA GA, CHICAGO IL, SEATTLE WA, FORT MYERS FL, DALLAS TX, FARGO ND, OMAHA NE</p>		