

L-1900

Fire-rated Fusible Link Louver for 1 3/4" Thick Doors up to 90 minutes

- Blades close when activated by fire/heat
- 18 ga. cold rolled steel frame
- 18 ga. cold rolled steel adjustable "Z" blades
- Mitered corners secured with reinforcing clips
- Stainless Steel Spring
- 165° Fusible link
- Free area 40%
- #8 x 3/4" Phillips head SMS
- Gray Primer (GPZ) powder coat finish


Available Options

- Aluminum insect screen - 22 ga. 1/8" square mesh installed on exterior side unless requested otherwise
- Torx Security screws
- Galvanneal A40 steel




*up to 90 minutes

Size Information:
Available in whole inch increments
Minimum size: 10" x 6"
Maximum size: 24" x 30"

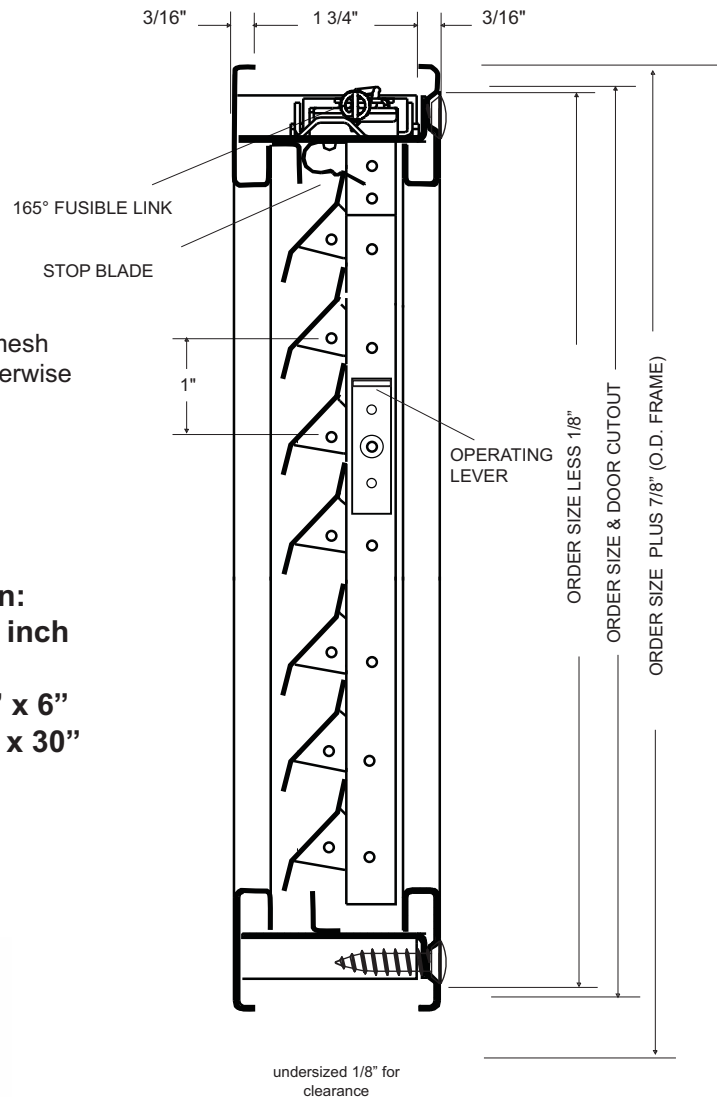

not to scale



top view fusible link mechanism