



THRESHOLDS & DOOR WEATHER SEALS

CATALOG VERSION - 2026

🏠 6605 Flotilla St. Commerce, California, 90040, U.S.A

☎ (323) 888-6601

🖨 (323) 888-6699

🌐 www.cal-royal.com

✉ sales@cal-royal.com

10/26 VERSION NO.
PUBLISHED **1.2**

TABLE OF CONTENTS

I. THRESHOLDS

Saddle Thresholds	1
Carpet / Special Purpose Thresholds	1
Overhead Rain Drip Weatherstrip	1
Sill Nosing	1
Vinyl Thresholds	2
Panic Saddle Thresholds	2
Panic Saddle Thresholds Accessories	2
Thresholds Comparison Chart	3

II. DOOR WEATHER SEALS

Automatic Door Bottoms

Heavy Duty, Automatic Door Bottom with Neoprene Insert	5-6
Regular Duty, Automatic Door Bottom with Vinyl Insert	5-6
Light Duty, Automatic Door Bottom with Vinyl Insert	5

Adhesive Weatherstrips

Silicone Adhesive Weatherstrips	7
Silicone Adhesive Weatherstrips with Intumescent	8
Adhesive-Backed Intumescent	8

Brush Weatherstrips

Nylon Brush Weatherstrips	9
Nylon Brush Weatherstrips with Rain Drip	9

Door Bottom Sweeps

Door Bottom Sweep with Vinyl Insert	10
Door Bottom Sweep with Rain Drip and Vinyl Insert	10
Door Bottom Sweep with Neoprene Insert	10

Door Shoes

Door Shoes with Vinyl Insert	11-12
Door Shoes with Rain Drip and Vinyl Insert	11-12

Perimeter Gasketing

Perimeter Gasketing with Vinyl Insert	13
---	----


T-Astragal

T-Astragal with Vinyl Insert	14
Door Weather Seal Accessories	15
Door Weather Seal Comparison Chart	16

SADDLE THRESHOLDS




CR2704
1/2" H x 4" W



CR27105
1/2" H x 5" W




CR3704
1/4" H x 4" W



CR3715
1/4" H x 5" W



CR2715
1/2" H x 5" W



CR2726
1/2" H x 6" W




CR3726
1/4" H x 6" W


Testing/Ratings:




CR2767
1/2" H x 7" W



CR3767
1/4" H x 7" W

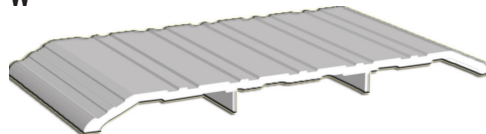


CR2768
1/2" H x 8" W




CR3768
1/4" H x 8" W

CARPET SPECIAL PURPOSE THRESHOLDS

Testing/Ratings:




CR3361
7/16" H x 1 3/4" W CARPET
THRESHOLD



CR33641
7/16" H x 4" W CARPET
THRESHOLD


OVERHEAD RAIN DRIP WEATHERSTRIP

Testing/Ratings:




CR4462
2 1/2" DOOR TOP
DRIP EDGE

SILL NOSING




CR4243
3 1/2" WIDE
SILL NOSING

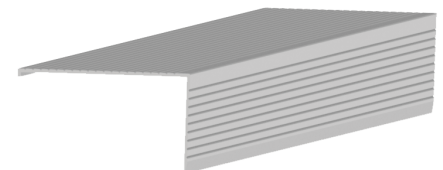



CR4244
1 1/2" H x 2 3/4" W
SILL NOSING

Note: Products shown in this section are not drawn to scale. | Available Finishes: ALUMINUM, DARK BRONZE, BLACK


VINYL THRESHOLDS

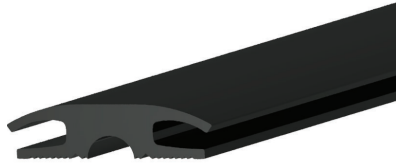



VT38
3/4" H x 2 3/4" W

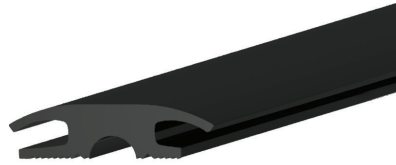

VT49
3/4" H x 2 13/16" W



VT51
1 1/2" H x 5 1/2" W

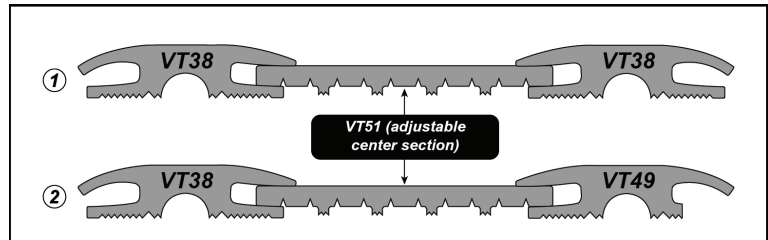


VT51 Applications: Must be used as a center section for


- ① 2pcs of VT38, or
- ② 1pc VT38 and 1pc VT49

Note: Products shown in this section are not drawn to scale. | Available Finishes: BLACK, DARK BRONZE

PANIC SADDLE THRESHOLDS

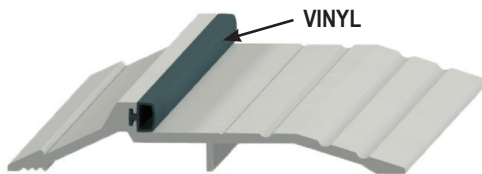

PST-200
7/8" H x 5" W

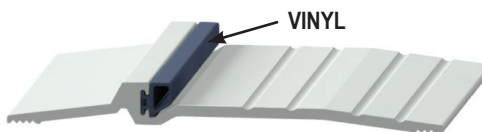

PST-201
1/2" H x 5" W

Testing/Ratings:



Note: Products shown in this section are not drawn to scale.
Available Finishes: ALUMINUM, DARK BRONZE, BLACK

ADDITIONAL ACCESSORIES FOR PANIC SADDLE THRESHOLDS (PST-200 & PST-201)

ITEM #	SIZE	DESCRIPTION	FINISH	
INS200-36	36"	Vinyl Insert for PST-200	BLACK	
INS200-48	48"			
INS200-72	72"			
INS200-96	96"			
INS201-36	36"	Vinyl Insert for PST-201		
INS201-48	48"			
INS201-72	72"			
INS201-96	96"			
SFH101.5	#10 x 1 1/2" PFHWS for PST-200			ALUM, DURO
SFH101	#10 x 1" PFHWS for PST-201			

THRESHOLDS COMPARISON CHART

SIZE	CAL-ROYAL	HAGER	REESE	NGP	PEMKO	ZERO
SADDLE THRESHOLDS						
1/2" H x 4" W	CR2704	404S	S424A/D	424	170	654
1/2" H x 5" W	CR27105	412S	S425A/D	325	1710	655
1/2" H x 5" W	CR2715	412S	S425A/D	325	171	655
1/2" H x 6" W	CR2726	415S	S426A/D	426	172	656
1/2" H x 7" W	CR2767	416S	S427A/D	427	176	657
1/2" H x 8" W	CR2768	426S	----	428E	2548	----
1/4" H x 4" W	CR3704	403S	S404A/D	413	270	544
1/4" H x 5" W	CR3715	413S	S405A/D	513	271	545
1/4" H x 6" W	CR3726	417S	S406A/D	613	272	546
1/4" H x 7" W	CR3767	430S	S407A/D	713	276	547
1/4" H x 8" W	CR3768	428S	----	813	2748	----
PANIC EXIT SADDLE THRESHOLDS						
7/8" H x 5" W	PST-200	541S	S487	804	177	560
1/2" H x 5" W	PST-201	520S	S483	896	2005	65
VINYL THRESHOLDS						
3/4" H x 2 3/4" W	VT38	900S	---	401	EV232	---
3/4" H x 2 13/16" W	VT49	901S	---	402	EV2325	---
1 1/2" H x 5 1/2" W	VT51	905S	---	403	EV2321	---
CARPET SPECIAL PURPOSE THRESHOLD						
7/16" H x 1 3/4" W	CR3361	505S	S565A/D	414	236	1682
7/16" H x 4" W	CR33641	506S	S563A/D	404	2364	1684
OVERHEAD RAIN DRIP WEATHERSTRIP						
2 1/2" W	CR4462	810S	R201A/D	16A	346	142
SILL NOSING						
3 1/2" W	CR4243	---	---	---	324	---
1 1/2" H x 2 3/4" W	CR4244	---	---	---	326	---



HOW TO ORDER Example: **CR270436 ALUM**

Model Number:

Size / Length:

Size / Length for Vinyl Thresholds:

- » 36 - 36"
- » 48 - 48"
- » 72 - 72"
- » 96 - 96"

- » 36 - 36"
- » 48 - 48"
- » 73 - 73"

Size / Length for CR4462 Only:

- » 36 - 36"
- » 40 - 40"
- » 52 - 52"
- » 76 - 76"

Size / Length for CR4244 Only:

- » 36 - 36"
- » 48 - 48"
- » 72 - 72"
- » 96 - 96"
- » 120 - 120"

Finish:

- » ALUM
- » DURO
- » BLK or BLACK

GENERAL INFORMATION

Our Door Weather Seal products are officially **UL Listed (File R26381)** and engineered for durability and reliable performance. This solution restricts air, light, smoke, and insects from around the opening, having been rigorously tested to meet or exceed **UL1784 Smoke, ASTM E90 Sound, ASTM E283 Air, and BHMA performance standards.**



UL Listed (File R26381) -
UL10C Fire Rated and
Positive Pressure



Meets UL1784 Smoke
Requirements



Meets ASTM E90 Sound
Requirements



Meets ASTM E283 Air
Leakage Requirements



Complies with BHMA
Performance Standards

MATERIALS AND FINISHES

Metals: Extruded Metal Products are made from 6063 Aluminum Alloy.

Standard Finishes:

- » **A** - Mill Finish Aluminum
- » **D** - Dark Bronze Anodized Aluminum
- » **B** - Black (*for Adhesive Weatherstrips*)
- » **W** - White (*for Adhesive Weatherstrips*)
- » **AN** - Mill Finish Aluminum with Neoprene Insert
- » **DN** - Dark Bronze Anodized Aluminum with Neoprene Insert
- » **AV** - Mill Finish Aluminum with Vinyl Insert
- » **DV** - Dark Bronze Anodized Aluminum with Vinyl Insert
- » **BLK** - Black Finish Aluminum with Neoprene or Vinyl Insert

**Other colors are available with factory lead time.*

Inserts: Some models have gasket inserts (seals). See below for all insert (seal) designations.

- » **N** - Neoprene
- » **NB** - Nylon Brush
- » **S** - Silicone Seal
- » **V** - Vinyl

PRODUCT DESCRIPTION

- » **ADB** - Automatic Door Bottoms
- » **BWR** - Brush Weatherstrips
- » **BTSR** - Door Bottom Sweeps with Rain Drip
- » **BTS** - Door Bottom Sweeps
- » **BTN** - Door Bottom Sweeps (with Neoprene Insert)
- » **C** - Adhesive Weatherstrips
- » **DS** - Door Shoes
- » **DSR** - Door Shoes with Rain Drip
- » **EAST** - T-Astragal
- » **INT** - Adhesive Weatherstrips with Intumescent
- » **PG** - Perimeter Gasketing

HOW TO ORDER

Example: ADB-701AN-36

Model Number

Finish:

- » **A, D, B, W, AN, DN, AV, DV, or BLK**

Size / Length:

- » **36** - 36"
- » **48** - 48"
- » **80** - 80"
- » **84** - 84"
- » **96** - 96"
- » **108** - 108"
- » **120** - 120"

Size / Length for Adhesive Weatherstrips:

- » **17** - 17'
- » **20** - 20'
- » **25** - 25'
- » **204** - 204'
- » **510** - 510'

Size / Length for Adhesive Weatherstrips with Intumescent:

- » **3684** - 1 piece @ 36" + 2 pieces @ 84"
- » **4896** - 1 piece @ 48" + 2 pieces @ 96"
- » **9696** - 3 pieces @ 96"

Size / Length for Perimeter Gasketing:



- » **3684** - 1 piece @ 36" + 2 pieces @ 84"
- » **4884** - 1 piece @ 48" + 2 pieces @ 84"
- » **4896** - 1 piece @ 48" + 2 pieces @ 96"
- » **7284** - 1 piece @ 72" + 2 pieces @ 84"
- » **7296** - 1 piece @ 72" + 2 pieces @ 96"

(See pages 5-14 for the available size / lengths of each model)


SPECIFICATIONS

- » Automatic Door Bottoms are made from Extruded Aluminum combined with Neoprene or Vinyl seals.
- » It provides an efficient seal that blocks out air, smoke, sound, and fire.
- » Available in Surface Mounted, Semi-Mortised and Mortised Applications.
- » It can be installed on either wood or hollow metal doors; or as specified on each model.
- » Non-Handed, Reversible for Left or Right Hand Installation.
- » Low closing force; Slotted holes for adjustment.
- » Maximum cut should not be closer to 1 1/2" to the set screw.


Testing/Ratings:

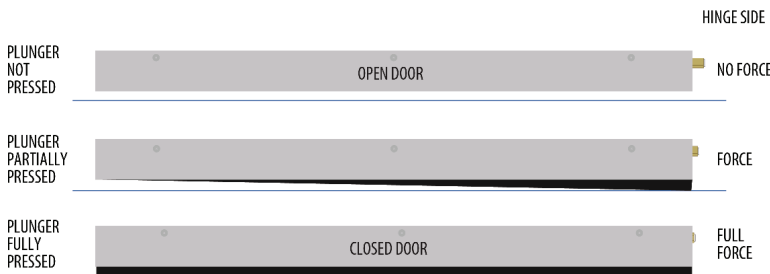

SURFACE MOUNTED




SEMI-MORTISED



MORTISED

- » The drop bar mechanism prevents the seal from dragging along the floor or threshold while the door is being closed.




ADB-701

Finish Options: AN, DN, BLK
Length Available: 36", 48"
Max. Drop: 7/8" (22.2mm)

Heavy Duty, **Semi-Mortised or Surface Mounted Application**
for use with Wood or Hollow Metal Doors
Supplied with Closed Cell Sponge **Neoprene**

Comes Standard with:
#8 x 1 1/2" Truss PHSMS, and
#8 x 1 1/2" Truss FHSMS




ADB-702

Finish Options: AV, DV, BLK
Length Available: 36", 48"
Max. Drop: 3/4" (19.1mm)

Regular Duty, **Semi-Mortised or Surface Mounted Application**
for use with Wood or Hollow Metal Doors
Supplied with Solid **Vinyl** Extrusion

Comes Standard with:
#8 x 1 1/2" Truss PHSMS, and
#8 x 1 1/2" Truss FHSMS



ADB-703

Finish Options: AV, DV, BLK
Length Available: 36", 48"
Max. Drop: 3/4" (19.1mm)


Light Duty, **Mortised Applications.**
for use with Wood Doors.
Supplied with **Vinyl** Seal.

Comes Standard with #6 x 3/4" PPHSDS

Note: Products shown in this section are not drawn to scale.

Available Finishes: AN (Mill Finish Aluminum with Neoprene Insert) | DN (Dark Bronze Anodized Aluminum with Neoprene Insert) | AV (Mill Finish Aluminum with Vinyl Insert) | DV (Dark Bronze Anodized Aluminum with Vinyl Insert) | BLK (Black Finish Aluminum with Neoprene or Vinyl Insert)

Testing/Ratings:

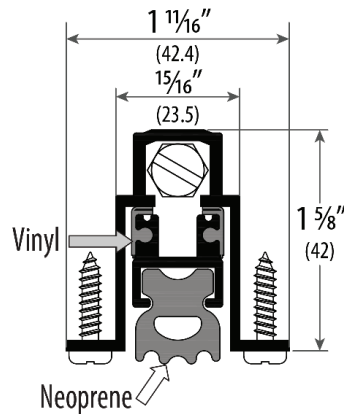

ADB-704

Finish Options: AN, DN, BLK


Length Available: 36", 48"

Max. Drop: 7/8" (22.2mm)

Heavy Duty, **Mortised** Applications
for use with Wood Doors

Supplied with Closed Cell Sponge **Neoprene**

Comes Standard with #6 x 3/4" PPHSDS



ADB-705

Finish Options: AV, DV, BLK

Length Available: 36", 48"

Max. Drop: 1/2" (12.7mm)

Regular Duty, **Mortised** Applications
for use with Hollow Metal Doors


Supplied with **Vinyl** Seal

Not supplied with End Plates

Comes Standard with #6 x 3/4" PPHSDS

Note: Products shown in this section are not drawn to scale.



Available Finishes: AN (Mill Finish Aluminum with Neoprene Insert) | DN (Dark Bronze Anodized Aluminum with Neoprene Insert) |
AV (Mill Finish Aluminum with Vinyl Insert) | DV (Dark Bronze Anodized Aluminum with Vinyl Insert) |
BLK (Black Finish Aluminum with Neoprene or Vinyl Insert)

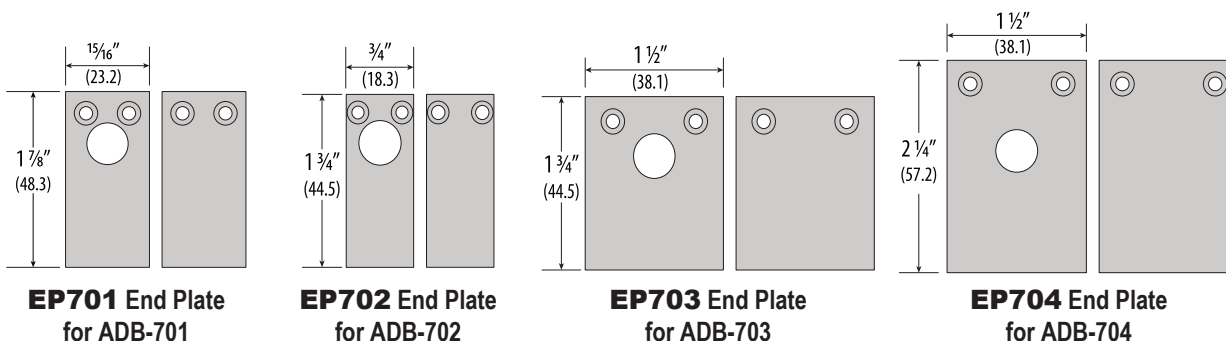

- » Anodized Aluminum plates at 0.063" thick.
- » End Plates are available for both ends and can easily be removed without taking door off the frame.
- » All Automatic Door Bottom models are provided with end plates (except ADB-705) with screws to protect the mechanism and for aesthetics.

ADHESIVE WEATHERSTRIP SPECIFICATIONS

- » Adhesive Weatherstrips are made from Silicone Rubber with 3M Adhesive Tape that can handle various applications and high temperature (effective between -58°F and 450°F).
- » High Quality Self Adhesive with strong initial adhesion and long term holding power.
- » Provides a simple and cost-effective way to create a seal around your door frame.
- » Non-Toxic and Self-Extinguishing; Resistant to sunlight, ozone, oxidation, weather, water and flames.
- » Impermeable to mildew and fungus; will not degenerate under normal exposure.
- » Used for Wood or Hollow Metal Frames.

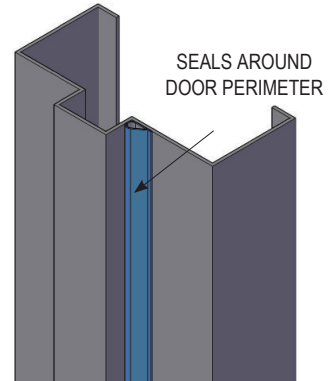


C-440

Testing/Ratings:



Finish Options: B, W
Length Available: 17', 20', 25', 204', 510'
Seal begins compressing at $\frac{5}{16}$ ".
Compresses to seal up to a $\frac{1}{16}$ " gap.
Designed for tighter frames.
Demonstrates extremely low closing force.




C-0773

Testing/Ratings:



Finish Options: B, W
Length Available: 17', 20', 25', 204', 510'
Seal begins compressing at $\frac{3}{8}$ ".
Compresses to seal up to a $\frac{1}{16}$ " gap.
Triple-Fin designed to block light and sound.

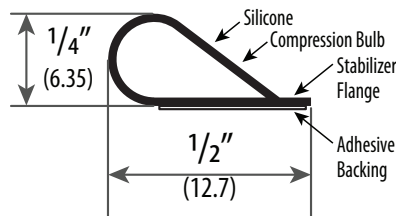


C-880

Testing/Ratings:




Finish Options: B, W
Length Available: 17', 20', 25', 204', 510'
Seal begins compressing at $\frac{1}{4}$ ".
Compresses to seal up to a $\frac{1}{16}$ " gap.

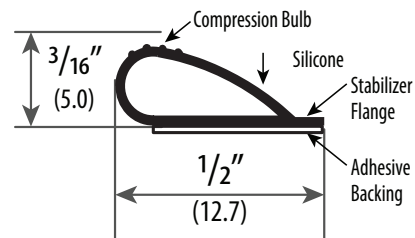

C-550

Finish Options: B, W
Length Available: 17', 20', 25', 204', 510'
Seal begins compressing at $\frac{3}{16}$ ".
Compresses to seal up to a $\frac{1}{16}$ " gap.


Note: Products shown in this section are not drawn to scale. | Available Finishes: B (Black) | W (White)



INT-001

Adhesive-Backed Intumescent

Finish Options: B, W
Length Available: 17', 25'




INT-440

Testing/Ratings:



C-440 x INT-001 Combination

Finish Options: B, W
Length Available: 3684, 4896, 9696
Compresses to seal up to a 1/8" gap.

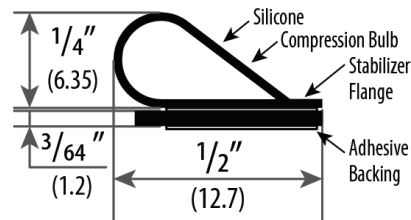

INT-880

Testing/Ratings:



C-880 x INT-001 Combination



Finish Options: B, W
Length Available: 3684, 4896, 9696
Compresses to seal up to a 1/8" gap.

Note: Products shown in this section are not drawn to scale. | Available Finishes: B (Black) | W (White)


BRUSH WEATHERSTRIP SPECIFICATIONS

- » Brush Weatherstrips are designed to seal the gap around the door, between the bottom of the door, and the top of the threshold or floor surface.
- » Energy efficient; prevents heat loss and infiltration of sound, light, drafts, insects, moisture, smoke or fire.
- » It consists of high quality Nylon Brush encased in Extruded Aluminum Seal Retainers.
- » These products can be used on either Wood or Hollow Metal doors (in-door sweep, jamb / header gasketing, and split astragal) applications.
- » Punched with slotted holes for adjustment.
- » Also available with a rain drip design (**BWR-301**), which deflects water.


Testing/Ratings:

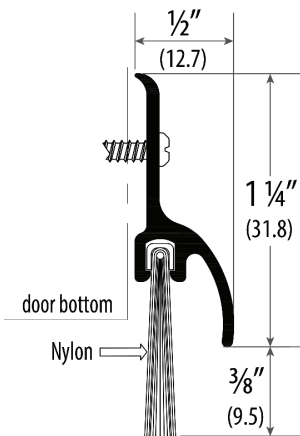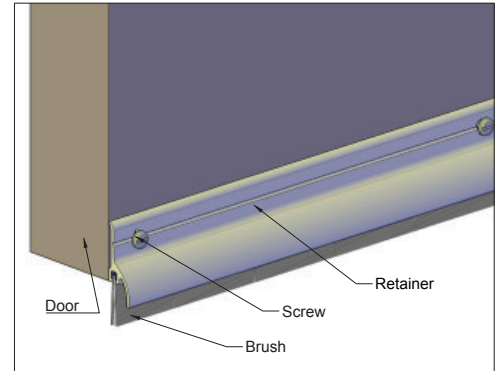


BWR-301

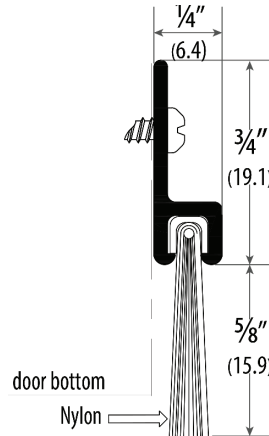

BW-302

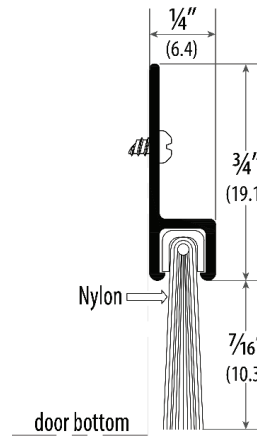

BW-303

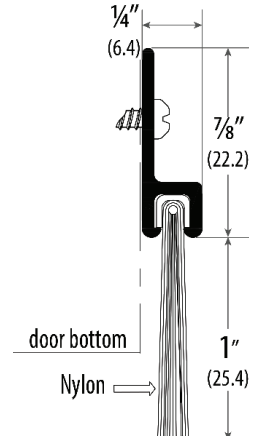

BW-305

Finish Options: A, D, BLK
Length Available: 36", 48"
Width: 1/2" (12.7mm)
Profile Height: 1 1/4" (31.8mm)
Total Height: 1 5/8" (41.3mm)
Comes Standard with:
#6 x 5/8" PPHSMS

Finish Options: A, D, BLK
Length Available: 36", 48"
Width: 1/4" (6.4mm)
Profile Height: 3/4" (19.1mm)
Insert Height: 5/8" (15.9mm)
Total Height: 1 3/8" (35mm)
Comes Standard with:
#6 x 5/8" PPHSMS

Finish Options: A, D, BLK
Length Available: 36", 48", 84", 96"
Width: 1/4" (6.4mm)
Profile Height: 3/4" (19.1mm)
Insert Height: 7/16" (10.3mm)
Total Height: 1 3/16" (29.4mm)
Comes Standard with:
#6 x 5/8" PPHSMS

Finish Options: A, D, BLK
Length Available: 36", 48"
Width: 1/4" (6.4mm)
Profile Height: 7/8" (22.2mm)
Insert Height: 1" (25.4mm)
Total Height: 1 7/8" (47.6mm)
Comes Standard with:
#6 x 5/8" PPHSMS



Note: Products shown in this section are not drawn to scale.

Available Finishes: A (Mill Finish Aluminum) | D (Dark Bronze Anodized Aluminum) | BLK (Black Finish Aluminum)

SPECIFICATIONS


- » Door Bottom Sweeps are used to seal the gap at the bottom of the door to prevent infiltration of sound, light, drafts, insects, moisture, smoke or fire.
- » Surface mounted to the face of the door. They are commonly used on the exterior of outswing doors.
- » Made of Extruded Aluminum Retainer with Vinyl or Neoprene Insert.
- » Used on either Wood or Hollow Metal doors.
- » Punched with slotted holes for adjustment.
- » Also available with a rain drip design (*prefix BTSR*), which deflects water.

Testing/Ratings:

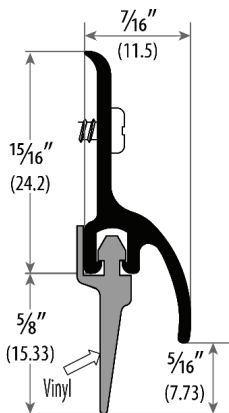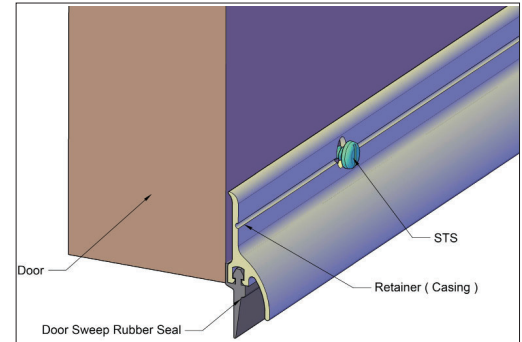


BTSR-107

Finish Options: AV, DV,
BLK
Length Available: 36", 48"
Width: 7/16" (11.5mm)
Profile Height: 1 1/4"
(31.8mm)
Total Height: 1 9/16"
(39.5mm)
Comes Standard with:
#6 x 5/8" PPHSMS

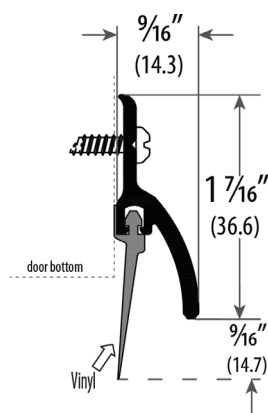


BTSR-108

Finish Options: AV, DV,
BLK
Length Available: 36", 48"
Width: 9/16" (14.3mm)
Profile Height: 1 7/16"
(36.6mm)
Total Height: 2"
(51.3mm)
Comes Standard with:
#6 x 5/8" PPHSMS

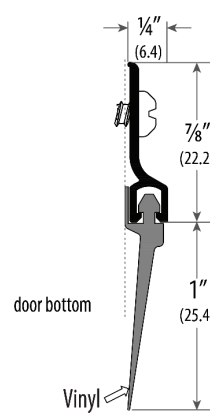


BTS-103

Finish Options: AV, DV,
BLK
Length Available: 36", 48"
Width: 1/4" (6.4mm)
Profile Height: 7/8"
(22.2mm)
Insert Height: 1"
(25.4mm)
Total Height: 1 7/8"
(47.6mm)
Comes Standard with:
#6 x 5/8" PPHSMS

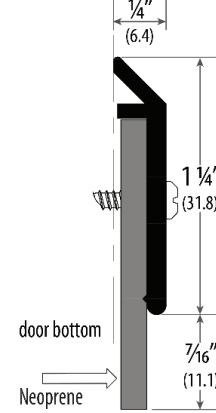

BTN-112

Finish Options: AN, DN,
BLK
Length Available: 36", 48"
Width: 1/4" (6.4mm)
Profile Height: 1 1/4"
(31.8mm)
Total Height: 1 11/16"
(42.9mm)
Comes Standard with:
#6 x 5/8" PPHSMS

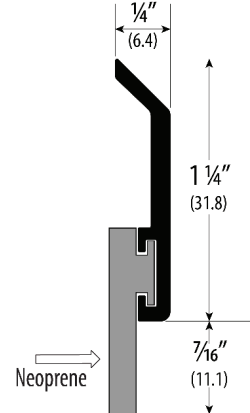

BTN-133


Finish Options: AN, DN,
BLK
Length Available: 36", 48"
Width: 1/4" (6.4mm)
Profile Height: 1 1/4"
(31.8mm)
Total Height: 1 11/16"
(42.9mm)
Comes Standard with:
#6 x 5/8" PPHSMS

Note: Products shown in this section are not drawn to scale.


Available Finishes: AN (Mill Finish Aluminum with Neoprene Insert) | DN (Dark Bronze Anodized Aluminum with Neoprene Insert) | AV (Mill Finish Aluminum with Vinyl Insert) | DV (Dark Bronze Anodized Aluminum with Vinyl Insert) | BLK (Black Finish Aluminum with Neoprene or Vinyl Insert)

SPECIFICATIONS

- » Door Shoe is applied to the underside of the door creating a barrier against dust, drafts, light, smoke, and fire without compromising the aesthetics of the door.
- » It is also used to provide protection for the bottom of the door.
- » It consists of Aluminum Channel with a flexible Vinyl Insert.
- » Channels are punched with slotted holes for easy adjustment.
- » Used on either Wood or Hollow Metal doors.
- » Also available with a rain drip design (*prefix DSR*), which deflects water from the door as well as sealing the bottom of the door.

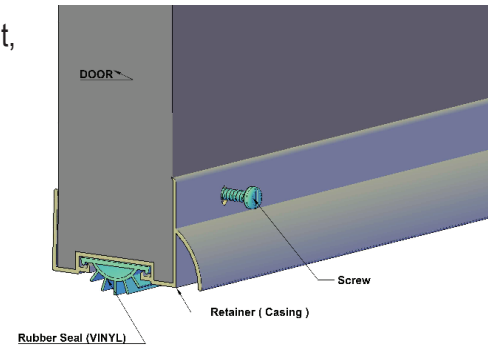


**Testing / Ratings: for DSR-407,
DS-403, DS-404, DSR-410**

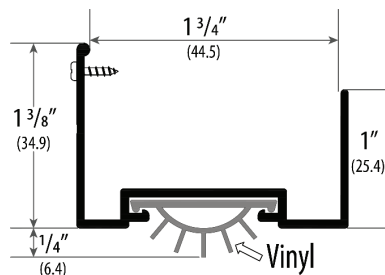


DS-403

Finish Options: AV, DV, BLK
Length Available: 36", 48"
Width: 1 3/4" (44.5mm)
Profile Height: 1 3/8" (34.9mm)
Total Height with Insert: Approx. 1 5/8" (41.3mm)
Comes Standard with #6 x 5/8" PPHSMS

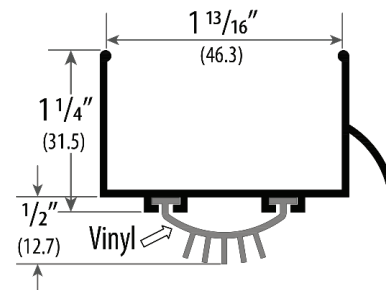


DSR-407

Finish Options: AV, DV, BLK
Length Available: 36", 48"
Width: 1 13/16" (46.3mm)
Profile Height: 1 1/4" (31.5mm)
Total Height with Insert: Approx. 1 3/4" (44.2mm)
Comes Standard with #6 x 5/8" PPHSMS

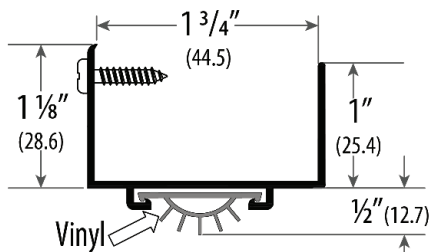

DS-404

Finish Options: AV, DV, BLK
Length Available: 36", 48"
Width: 1 3/4" (44.5mm)
Profile Height: 1 1/8" (28.6mm)
Total Height with Insert: Approx. 1 5/8" (41.3mm)
Comes Standard with #6 x 5/8" PPHSMS

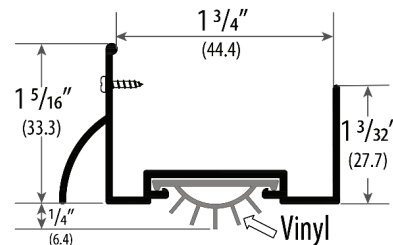


DSR-410

Finish Options: AV, DV, BLK
Length Available: 36", 48"
Width: 1 3/4" (44.4mm)
Profile Height: 1 5/16" (33.3mm)
Total Height with Insert: Approx. 1 9/16" (39.7mm)
Comes Standard with #6 x 5/8" PPHSMS

Note: Products shown in this section are not drawn to scale.

Available Finishes: AV (Mill Finish Aluminum with Vinyl Insert) | DV (Dark Bronze Anodized Aluminum with Vinyl Insert) | BLK (Black Finish Aluminum with Vinyl Insert)

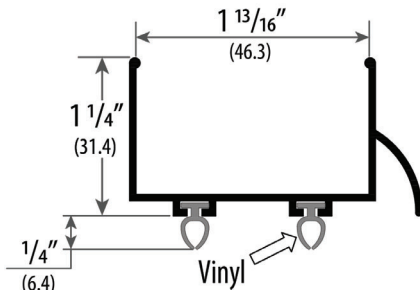

DSR-406

Testing/Ratings:



Finish Options: AV, DV, BLK


Length Available: 36", 48"

Width: 1 13/16" (46.3mm)

Profile Height: 1 1/4" (31.4mm)

Total Height with Insert: Approx. 1 1/2" (37.8mm)

Comes Standard with #6 x 5/8" PPHSMS

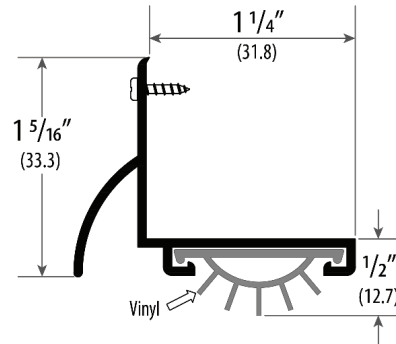

DSR-408

Testing/Ratings:



Finish Options: AV, DV, BLK


Length Available: 36", 48"

Width: 1 1/4" (31.8mm)

Profile Height: 1 5/16" (33.3mm)

Total Height with Insert: Approx. 1 7/8" (47.6mm)

Comes Standard with #6 x 5/8" PPHSMS



DS-413 / DS-414


Finish Options: AV, DV, BLK

Length Available: 36", 48"


Width: 1 3/16" (29.83mm)

Total Height with Insert: Approx. 1 1/16" (17.5mm)

Comes Standard with #6 x 5/8" PPHSMS



DS-413
(with Notched Fins)





DS-414
(without Notched Fins)

Note: Products shown in this section are not drawn to scale.

Available Finishes: AV (Mill Finish Aluminum with Vinyl Insert) | DV (Dark Bronze Anodized Aluminum with Vinyl Insert) | BLK (Black Finish Aluminum with Vinyl Insert)

SPECIFICATIONS

- » Perimeter Gasketing consists of an Aluminum Channel with a Vinyl Rubber Seal.
- » It is designed to seal the gaps around the top & two sides of a door.
- » Can be installed on either Wood or Metal frame.
- » It contains (1) Jamb Header piece and (2) Hinge & Strike Jamb pieces of weatherstrip.
- » Each weatherstrip can seal gaps up to the depth of its seal.
- » Seal depth provided on each illustration (example: PG-602 has a 1/4" seal; therefore, it can seal up to a 1/4" gap).
- » Channels are punched with slotted holes for easy adjustment.

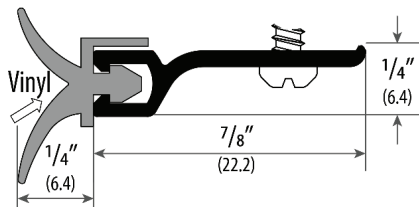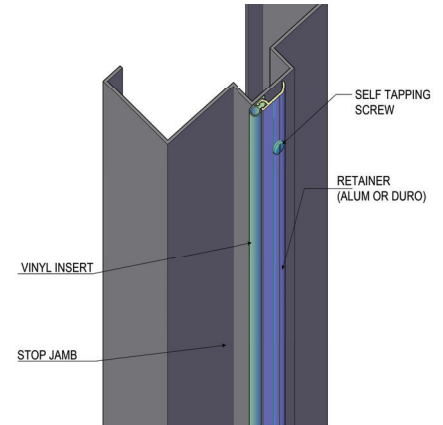


PG-601

Testing/Ratings:



Finish Options: AV, DV, BLK
Length Available: 3684, 4884, 4896, 7284, 7296
Width: 1/4" (6.4mm)
Profile Height: 7/8" (22.2mm)
Total Height: 1 1/8" (28.55mm)
Comes Standard with #6 x 5/8" PPHSMS

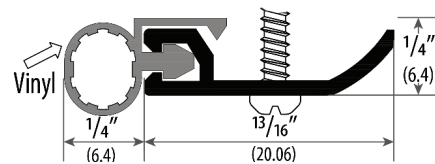


PG-602

Testing/Ratings:



Finish Options: AV, DV, BLK
Length Available: 3684, 4884, 4896, 7284, 7296
Width: 1/4" (6.4mm)
Profile Height: 13/16" (20.06mm)
Total Height: 1 1/16" (26.46mm)
Comes Standard with #6 x 5/8" PPHSMS

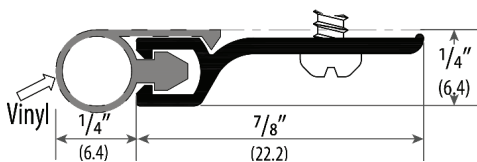


PG-603

Testing/Ratings:



Finish Options: AV, DV, BLK
Length Available: 3684, 4884, 4896, 7284, 7296
Width: 1/4" (6.35mm)
Profile Height: 7/8" (22.2mm)
Total Height: 1 1/8" (28.55mm)
Comes Standard with #6 x 5/8" PPHSMS

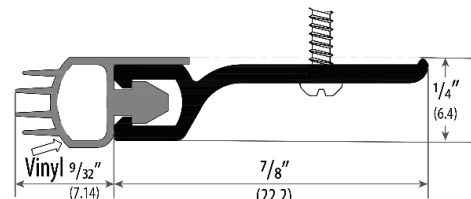

PG-604

Testing/Ratings:







Finish Options: AV, DV, BLK
Length Available: 3684, 4884, 4896, 7284, 7296
Width: 9/32" (7.14mm)
Profile Height: 7/8" (22.2mm)
Total Height: 1 3/16" (29.34mm)
Comes Standard with #6 x 5/8" PPHSMS

Note: Products shown in this section are not drawn to scale.

Available Finishes: AV (Mill Finish Aluminum with Vinyl Insert) | DV (Dark Bronze Anodized Aluminum with Vinyl Insert) | BLK (Black Finish Aluminum with Vinyl Insert)

SPECIFICATIONS

- » T-Astragals are used to attach to a pair of double doors that helps seal the gap between pairs of doors. It is also used to seal sound or air drafts.
- » It is often used on exterior double doors. (ex. front door entrance)
- » It consists of Aluminum Channel with a flexible Vinyl Insert.
- » Channels are punched with slotted holes for easy adjustment.
- » Used on either Wood or Hollow Metal doors.

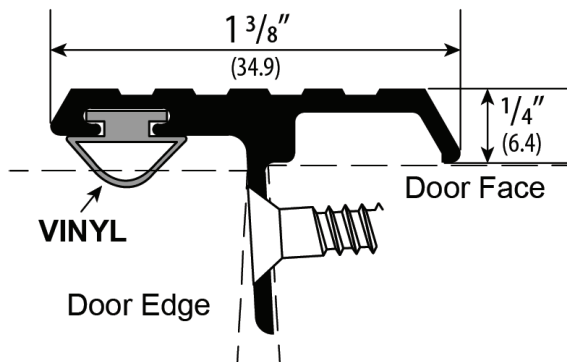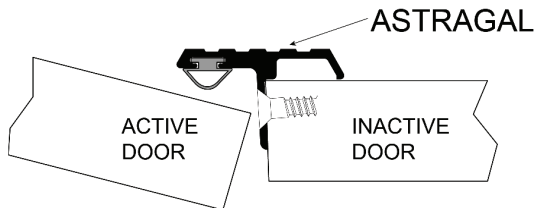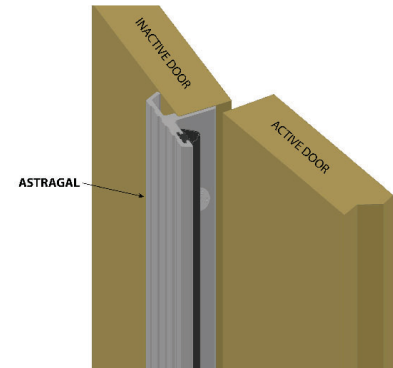

EAST-501

Testing/Ratings:



Finish Options: AV, DV, BLK

Length Available: 80", 84", 96", 108", 120"

Profile Width: 1 3/8" (34.9mm)

Profile Height: 1/4" (6.4mm)

Comes Standard with #6 x 1" PFHWS

Note: Product shown in this section is not drawn to scale.

Available Finishes: AV (Mill Finish Aluminum with Vinyl Insert) | DV (Dark Bronze Anodized Aluminum with Vinyl Insert) |

BLK (Black Finish Aluminum with Vinyl Insert)

AUTOMATIC DOOR BOTTOMS			
ITEM #	SIZE	DESCRIPTION	FINISH
INS701-36	36"	Neoprene insert for ADB-701 and ADB-704	BLACK
INS701-48	48"		
INS702-36	36"	Vinyl insert for ADB-702	
INS702-48	48"		
INS703-36	36"	Vinyl insert for ADB-703	
INS703-48	48"		
INS705-36	36"	Vinyl insert for ADB-705	
INS705-48	48"		
EP701	15/16" x 1 7/8"	End Plate for ADB-701	ALUM, DURO
EP702	3/4" x 1 3/4"	End Plate for ADB-702	
EP703	1 1/2" x 1 3/4"	End Plate for ADB-703	
EP704	1 1/2" x 2 1/4"	End Plate for ADB-704	

BRUSH WEATHERSTRIPS			
ITEM #	SIZE	DESCRIPTION	FINISH
INS301-36	36"	Nylon Brush for BWR-301	BLACK
INS301-48	48"		
INS302-36	36"	Nylon Brush for BW-302	
INS302-48	48"		
INS303-36	36"	Nylon Brush for BW-303	
INS303-48	48"		
INS303-84	84"		
INS303-96	96"		
INS305-36	36"	Nylon Brush for BW-305	
INS305-48	48"		

DOOR BOTTOM SWEEPS			
ITEM #	SIZE	DESCRIPTION	FINISH
INS107-36	36"	Vinyl insert for BTSR-107	BLACK
INS107-48	48"		
INS108-36	36"	Vinyl insert for BTSR-108	
INS108-48	48"		
INS103-36	36"	Vinyl insert for BTS-103	
INS103-48	48"		
INS112-36	36"	Neoprene insert for BTN-112	
INS112-48	48"		

DOOR SHOES			
ITEM #	SIZE	DESCRIPTION	FINISH
INS406-36	36"	Vinyl insert for DSR-406	GRAY
INS406-48	48"		
INS407-36	36"	Vinyl insert for DSR-407	
INS407-48	48"		
INS403-36	36"	Vinyl insert for DS-403, DS-404, DSR-408 and DSR-410	
INS403-48	48"		

PERIMETER GASKETING			
ITEM #	SIZE	DESCRIPTION	FINISH
INS601-3684	17'	Vinyl Insert for PG-601	GRAY
INS601-4884	18'		
INS601-4896	20'		
INS601-7284			
INS601-7296	22'		
INS602-3684	17'	Vinyl Insert for PG-602	
INS602-4884	18'		
INS602-4896	20'		
INS602-7284			
INS602-7296	22'		
INS603-3684	17'	Vinyl Insert for PG-603	
INS603-4884	18'		
INS603-4896	20'		
INS603-7284			
INS603-7296	22'		
INS604-3684	17'	Vinyl Insert for PG-604	
INS604-4884	18'		
INS604-4896	20'		
INS604-7284			
INS604-7296	22'		

SCREWS		
ITEM #	DESCRIPTION	FINISH
SPH815	#8 x 1 1/2" Truss PHSMS for ADB-701 and ADB-702	ALUM, DURO
SFH815	#8 x 1 1/2" Truss FHSMS for ADB-701 and ADB-702	
SPH675	#6 x 3/4" PPHSDS for ADB-703, ADB-704, and ADB-705	
SPH658	#6 x 5/8" PPHSMS for Brush Weatherstrip, Door Bottom Sweep, Perimeter Gasketing, and Door Shoe models	

DOOR WEATHERS SEALS COMPARISON CHART

CAL-ROYAL	PEMKO	HAGER	ZERO	COMBO	COLUMBIA	NGP	REESE
AUTOMATIC DOOR BOTTOM							
ADB-701	4301	747S	361 / 362	---	---	420	330
ADB-702	4131	740S	351 / 352	---	---	223	521
ADB-703	411	730S	320	244	---	335	370
ADB-704	434	743S	360	---	---	423	430
ADB-705	420	742S	355	---	---	320	372
ADHESIVE WEATHERSTRIP							
C-440	S44	728	---	---	3336	5060	798
C-550	PK55	---	---	---	---	---	---
C-880	S88	726	188S	---	3338	5050	797
C-0773	S773	738	---	---	---	5075	793
ADHESIVE WEATHERSTRIP WITH INTUMESCENT							
INT-001	HSS2000	729	3062500	---	200	9800	588
INT-440	HSS2000XS44	720	117S	---	3336	9850	---
INT-880	HSS2000XS88	722	188FS	---	3338	9750	---
BRUSH WEATHERSTRIP							
BWR-301	3452NB	---	8198	316	5820 / 5829	---	354
BW-302	18061	802S	8192	309	---	---	964
BW-303	18041	---	---	307	---	B606	959
BW-305	18100	801S	---	308	6620 / 6629	D608	967
DOOR BOTTOM SWEEP							
BTSR-107	3452V	---	---	215	5840 / 5849	---	---
BTSR-108	345	770S	8197	214	5860 / 5869	101V	353
BTS-103	307	756S	8191	209	6580 / 6589	97V	806
BTN-112	3151	750S / 752S	39	---	3350 / 3359	200NA	603
BTN-133	315	750	339	---	---	200	---
DOOR SHOE							
DS-403	222	780S	---	---	669	---	DB596
DS-404	217	779S	111	151	---	36V	DB594
DSR-406	---	---	---	256	258DV	---	---
DSR-407	216	---	---	257	258	---	DB595
DSR-408	210V	777S	---	---	---	318	---
DSR-410	2221	---	---	---	---	---	---
DS-413	2343V	907S (notched)	---	---	---	12T-NF	---
DS-414	2343V (UN)	907S	---	---	---	12T	---
PERIMETER GASKETING							
PG-601	294	892S	---	---	6650	---	DS106
PG-602	297	896S	---	3212	3200	156	888
PG-603	303	891S	328	1000	3340	160	807
PG-604	306	---	---	---	---	164	822
T-ASTRAGAL							
EAST-501	355	837	---	1201	341	158	---