

6300M Series

Mortise Exit Device

Architectural Submittal Sheet



Specifications

Rail:	• Extruded aluminum
Latch:	• Stainless steel dead locking with 3/4" throw
Hand:	• Field reversible
Dogging:	• Hex key dogging standard • Cylinder dogging optional • Dogging not available for fire labeled devices & 24" devices
Minimum Stile Width:	• 5"
Door Thickness:	• 1-3/4" - 2"
Door Width:	• 24", 36", 48" standard
Door Height:	• Panic - Up to 10' • Fire - See fire ratings charts in price book
Strike Options:	• Default ASA (4-7/8")
Finishes:	• 605 - Bright Brass, 606 - Satin Brass, 613E - Dark Oxidized Satin Bronze (Equivalent), 622 - Flat Black, 626 - Satin Chrome, 630 - Satin Stainless Steel, 630F - Full Stainless Steel • Optional Anti Microbial Coating available on 626 & 630
Fasteners:	• Includes machine screws and wood screws • SNB Optional
Warranty:	• Ten (10) year limited warranty
Electrified Options:	• Motorized Latch Retraction • Request to Exit/Signal Switch • Alarmed Exit • Latch Bolt Monitor • ISMC Connectors • Delayed Egress
Certifications, Compliances, Listings:	• ETL listed for UL 305 "Panic", listed for UL 10C "Fire Exit Hardware" up to 90 minutes (Certified Through Intertek) • Complies with ADA (Americans with Disabilities Act) and ICC/ANSI 117.1 for Accessible and Usable Buildings • Meets requirements of the BAA as a COTS product manufactured in the United States • Meets UL 294 rating when ordered with delayed egress option

6300M Series

6300M Mortise Exit Devices

PART	DESCRIPTION
6300M	Mortise wide stile exit, Listed to UL305 for Panic, hex key dogging, 3'0" door width
6300MF	Mortise wide stile exit, Listed to UL10C for Fire, 3'0" door width
6310M	Mortise wide stile exit, Listed to UL305 for Panic, hex key dogging, 4'0" door width
6310MF	Mortise wide stile exit, Listed to UL10C for Fire, 4'0" door width
6320M	Mortise wide stile exit, Listed to UL305 for Panic, no dogging, 2'0" door
6320MF	Mortise wide stile exit, Listed to UL10C for Fire, no dogging 2'0" door

6300M Mortise Mechanical Options

PART	DESCRIPTION
EC	End Cap Cover
TLA	Head Cover (Similar to 6200 Series)
AM	Anti Microbial (630/626 only)
CD	Cylinder Dogging
LD	Less Dogging
SNB	Sex Nuts & Bolts
SHS	Tamper Proof Security Head Screws

6300M Mortise Electrical Options

PART	DESCRIPTION
AL	Alarmed Exit
LM	Latch Bolt Monitoring
MLR	Motorized Latch Retraction
SS	Signal Switch - Request to Exit and Monitoring
ALHW	Alarmed Exit with Hard Wire Power and Relay
ISMC	Industry Standard Molex Connector (order in addition to other electrified options)
DE	Delayed Egress

1: Electrified options not available on 24" device.


2: For the MLR Motorized Latch Retraction option: 3 ft devices, maximum cut is 3". 4 ft devices, maximum cut is 9".

3: For the Alarm option: 3 ft devices, maximum cut is 2". 4 ft devices, maximum cut is 8".


4: For Delayed Egress option: 3 ft. devices- no cut and for 4 ft devices, maximum cut is 6".

6300M Series

6300MF Mortise Devices

		RATING	MAX OPENING	APPLICATION
	Single Door	90 Minute Rated	4' x 8' Door	

6300 Series Wide Stile

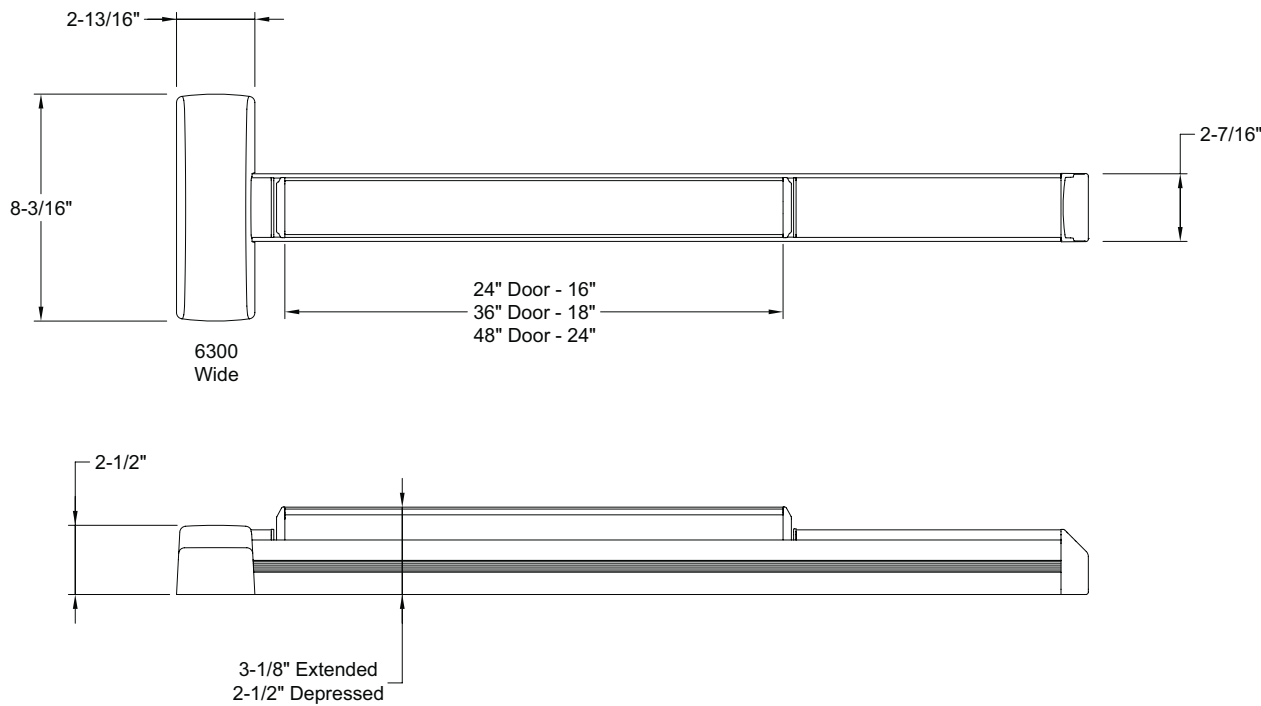

6300M Series

Finishes

605

Bright Brass

Gold anodized aluminum rail (matte), push bar sides and dogging filler Polished brass plated cast head cover and end caps. Polished brass plated heavy gauge stamped push bar face.

606

Satin Brass

Gold anodized aluminum rail (matte), push bar sides and dogging filler Brushed brass plated cast head cover and end caps. Brushed brass plated heavy gauge stamped push bar face.

613E

Dark Oxidized Satin Bronze (Equivalent)

Dark bronze anodized aluminum rail, push bar sides and dogging filler Powder coated cast head cover and end caps. Powder coated heavy gauge stamped push bar face.

622

Flat Black

Black anodized aluminum rail, push bar sides and dogging filler Powder coated cast head cover and end caps. Powder coated heavy gauge stamped push bar face

625

Bright Chrome

Clear anodized aluminum rail (matte), push bar sides and dogging filler Polished chrome plated cast head cover and end caps. Polished chrome plated heavy gauge stamped push bar face.

626

Satin Chrome

Clear anodized aluminum rail (matte), push bar sides and dogging filler Brushed chrome plated cast head cover and end caps. Brushed chrome plated heavy gauge stamped push bar face.

630

Satin Stainless

Clear anodized aluminum rail (matte), push bar sides and dogging filler Plated (stainless look) cast head cover and end caps. Brushed stainless heavy gauge stamped push bar face.

630F

Full Satin Stainless

Brushed stainless fully clad rail, push bar and dogging filler Plated (stainless look) cast head cover and end caps.

