


FEATURES

- Certification: UL Listed R14897 ANSI A156.2 Grade 1
- Door Thickness: 1 3/4" - 2"
- Backset UL Listed: 2 3/4" face, 1 1/8" x 2 1/4"
- Cylinder: Schlage "C" keyway
- Keying: Schlage 6 pin keyed
- Key: 2 six pin Nickel Plated
- Functions: See below
- Latch: 5/8" projection Stainless Steel 3 hour UL R14897
- Bore: 2 1/8" hole retrofits all cylindrical locksets
- Fits 161 Prep
- Strike: ANSI 1 1/4" x 4 7/8" strike
- Non-handed / reversible
- Warranty: 1 year mechanical and finish
- Finish: US26D

OPTIONS

- CL - Clutch function - Lever rotates without unlatching lock
- IC - Small format Figure 8 Interchangeable Core NOT included
- DL-DLUL238 - 2 3/8" backset, Deadlatch
- DL-SLUL238 - 2 3/8" backset, Springlatch
- DL-TA013 - 1 1/4" x 2 3/4" "T" Strike

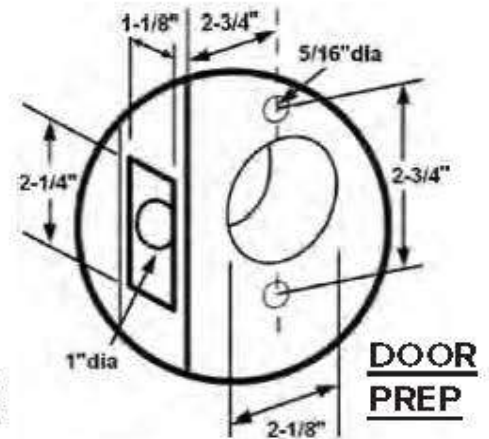

CROSS REFERENCE

FUNCTION	TA	DORMA	HAGER	CAL-ROYAL	PDQ	SCHLAGE
PASSAGE	DL-LHV10	CL810	3410	(C) GN-30	GT126	ND10S
PRIVACY	DL-LHV40	CL840	3440	(C) GN-20	GT176	ND40S
ENTRANCE	DL-LHV53	CL853	3453	(C) GN-00	GT116	ND53PD
CLASSROOM	DL-LHV70	CL870	3470	(C) GN-03	GT148	ND70PD
STOREROOM	DL-LHV80	CL880	3480	(C) GN-04	GT115	ND80PD

ACCESSORIES



KEYING OPTIONS

- (additional charges may apply)
- 2 keys per cylinder
 - KD: Keyed Different
 - KA: Keyed Alike
 - KA2: Keyed Alike; groups of 2
 - KEYWAYS: SC6, AR5, KW1

