



TDE-1000R Series
Grade-1, heavy-duty
rim exit devices



Specifications

Construction	Heavy-duty extruded anodized aluminum mechanism case and cover plate, steel chassis, steel center case cover, push pad, and end cap
Handing	Non-handed, completely reversible
Latchbolt	Deadlocking latchbolt with 5/8" projection, stainless steel
Strike	Roller strike with 5/8" projection, includes 1/8" shim plate
Dogging	5/32" hex key dogging standard on panic exit hardware (no dogging on 'F' model)
Lengths	3ft (for 2'4" to 3'0" wide doors and 4ft (for 3'4" to 4'0" wide doors)
Center Case	8" height x 2 7/8" wide x 2 13/16" thick - 4 1/2" minimum stile required
Projections	3-3/8" neutral or undogged, 2-13/16" depressed or dogged
Fasteners	Wood, machine & self tapping machine screws, 'F' model includes thru-bolts
Trim	Escutcheon lever, key-in-lever, and pull plate trim options
Accessories	ASA strike and latch fillers included - shim kits and other accessories available
Applications	Exterior or interior doors in commercial, institutional, and industrial buildings
Finishes	US32D/630 satin stainless steel, US19/BLK matte black
Warranty	Limited lifetime warranty

Code compliance


ANSI/BHMA	Meets ANSI/BHMA A156.3 Grade 1 standards
UL/cUL	UL listed panic hardware, 'F' model UL listed for "A" label 3 hour fire doors
ADA	Meets ADA and ANSI A117.1 accessibility codes with lever trim
CA Fire	Lever trim meets California code for 1/2" lever return to door face





TDE-1000R Series

How to order

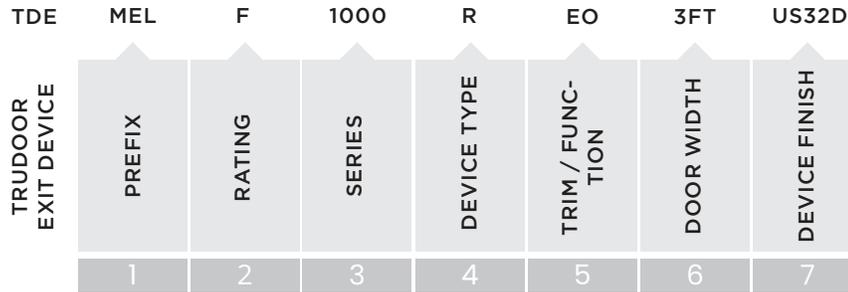

1 PREFIX	
None	Standard
ALK	Alarm kit
CD	Cylinder dogging - panic only
MEL	Motorized latch retraction

2 RATING	
None	Panic rated
F	Fire rated

3 SERIES	
1000	Heavy duty grade 1

4 DEVICE TYPE	
R	Rim exit device

5 TRIM / FUNCTION	
EO	Exit only
L	Escutcheon lever (classroom or storeroom)
L-SFIC	Escutcheon lever, SFIC prep (less core)
L-BE	Blank escutcheon lever (passage)
L-DT	Dummy escutcheon lever (rigid)
KIL	Key-in-lever (classroom)
KIL-SFIC	Key-in-lever, SFIC prep (classroom)
KIL-NL	Key-in-lever (night latch / storeroom)
PAS	Key-in-lever, keyless (passage)
NL	Pull (night latch)
NL-DFP	Double finger pull (night latch)
DT	Pull (dummy)
NL-OP	Night latch cylinder assembly, optional pull

6 DOOR WIDTH	
3FT	For doors 2'4" to 3'0"
4FT	For doors 3'4" to 4'0"

7 DEVICE FINISH	
US32D	Satin stainless steel
BLK	Matte black



US32D/630
Satin stainless steel



US19/BLK
Matte Black



L - Escutcheon lever



L-BE - Escutcheon lever



TDE Exit Device Trim

Escutcheon Lever Trim



TDE-E08
ANSI Function: 08 or 09
Classroom / Night Latch



TDE-E08-SFIC
ANSI Function: 08 or 09



TDE-E14
ANSI Function: 14
Passage



TDE-E02
ANSI Function: 02
Dummy

Key-in-Lever Trim



TDE-KIL
ANSI Function: 08
Classroom



TDE-KIL-SFIC
ANSI Function: 08
Classroom



TDE-KIL-STOREROOM
ANSI Function: 09
Storeroom / Night Latch



TDE-PAS
ANSI Function: 14
Passage

Pull Trim



TDE-NL
ANSI Function: 03
Night Latch



TDE-DT
ANSI Function: 02
Dummy



TDE-DFP-NL
ANSI Function: 03
Night Latch



TDE-NL-OP
ANSI Function: 03
Night Latch, Optional Pull