


Self-Attaching, Beveled Vision Lite with Single Side Fasteners For Fire Rated Doors for 3/16" to 1/4" Glass

SPECIFICATIONS:

Material:	20 gauge CRS frame. Min Size 3" x 3", Max 60" x 104". See Fire Rating Below.
Construction:	1-1/4" trim, with mitered and welded corners. Continuous glass retainer, counter-sunk mounting holes in the bevel on non-corridor side. 3/8" projection from door.
Door:	For 1-3/4" door. For other sizes, see VLFIG & VLFEZIG. Door cutout = order size.
Fasteners:	#8 x 1" flathead phillips SMS to match finish.
Powder Coat Finishes:	___ (B) Mineral Bronze ___ (G) Gray (stock colors) ___ (BK) Black ___ (FBK) Flat Black ___ (W) White ___ (SB) SC Beige ___ (SI) Silver ___ (R) Red ___ (S) Sand ___ (AB) AMS Beige ___ (GH) Gray Hammertone View Colors Online
Glass:	3/16" - 1/4" glazing to be ordered separately from Glazing Section of catalog. Use fire rated glazing with Warnock Hersey (WHI) or UL classification markings for fire rated applications. Visible light is 2" under rough opening size. <u>Glass is 1" under order size.</u> Fire-Rated Air Louvers Glazing to fit this vision frame: WS, KFRF, PPF.
Fire-Rating, Testing & Listings:	When installed in properly rated and approved door, ratings up to 3 hours can be achieved, depending on the glazing used. See glazing ratings for max exposed area. Tested and Listed for UL 10C and Criteria of UBC 7-2 Positive Pressure. See detailed installation instructions.

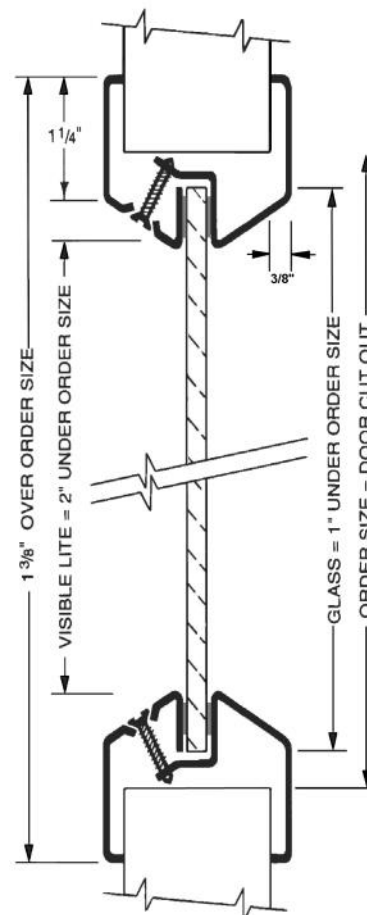

OPTIONS AT ADDITIONAL COST:

PAK:	Includes Vision Lite, Glass Sized to Fit, Applied Glazing tape for UL10B Installations, Securely Packaged Individually. See First Page in Vision Lite Catalog.
UBC 7-2 Installation:	___ Additional intumescent tape for Positive Pressure UL10C. See detailed installation instructions.
Finishes & Materials:	___ (S) 20 Gauge Stainless Steel: #4 Finish. ___ (G) Galvanized Sheet for Exterior Applications. ___ (E) Electro Zinc Plating for Maximum Corrosion Resistance.
Fasteners:	___ Torx ___ Other: _____
Mullions:	Factory welded to vision lite & painted. See Mullions Page in this section to order.
Privacy Screen:	Add the New Privacy Screen to This Vision Lite— See Web Page for Details
Custom:	Smaller or larger sizes. Leadlined. Contact Customer Service for special orders.

STOCK ITEM - MANY STANDARD SIZES OF VLFEZ IN STOCK FOR NEXT DAY SHIPMENT FROM ALL WAREHOUSES - LINK

Order Format: **VLFEZ** Option S,G,EG W H Color Example: **VLFEZ 1212AB**

Interpretation of Fire and Building Codes May Vary. Consult with the Local Authority Having Jurisdiction (AHJ) to determine appropriate standards.

<p>© 2017 Activar Construction Products Group, Inc.</p>	Distributor:	Width: ___ x Height: ___
	Architect:	Quantity:
	Contractor:	Model:
	Project:	Date: Version: ALPDS1612

800-554-6077 QUOTES@ACTIVARCPG.COM ORDERS@ACTIVARCPG.COM SALES@ACTIVARCPG.COM Fax: 952-835-2218

VISIT WWW.ACTIVARCPG.COM FOR THE MOST UPDATED PRODUCT INFORMATION BEFORE ORDERING

MFG: COMMERCE CA, BLOOMINGTON, MN • WAREHOUSES: LANCASTER PA, ATLANTA GA, CHICAGO IL, SEATTLE WA, FORT MYERS FL, DALLAS TX, FARGO ND, OMAHA NE